

RB2026


🌐 Programación de MG995 Con BT

🎮 programación de BTS7960 con BT

🔖 Código unificado y funcional

Materiales utilizados

BTS7960

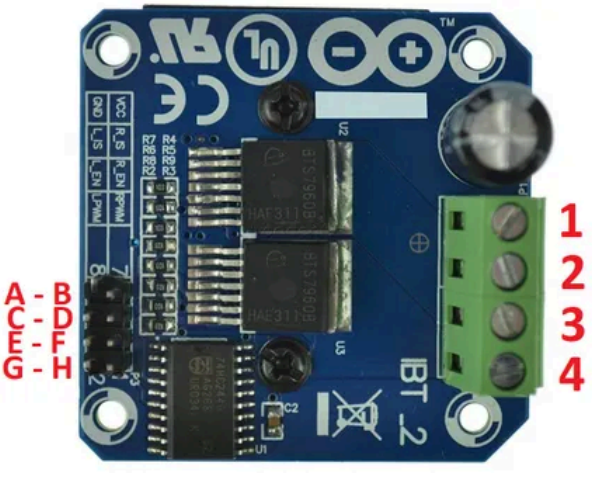


A (GND): ground
B (VCC): controller power supply (5V)
C (L IS): reverse/current alarm output
D (R IS): forward/current alarm output
E (L EN): reverse/enable (active HIGH)
F (R EN): forward/enable (active HIGH)
G (LPWM): reverse/PWM (active HIGH)
H (RPWM): forward/PWM (active HIGH)
1 (B-): motor power supply-
2 (B+): motor power supply+ (5.5-27V)
3 (M+): motor+
4 (M-): motor-

RS550 de 6V



ESP 32

Durante el desarrollo de este proyecto, se utilizaron diferentes modelos de ESP

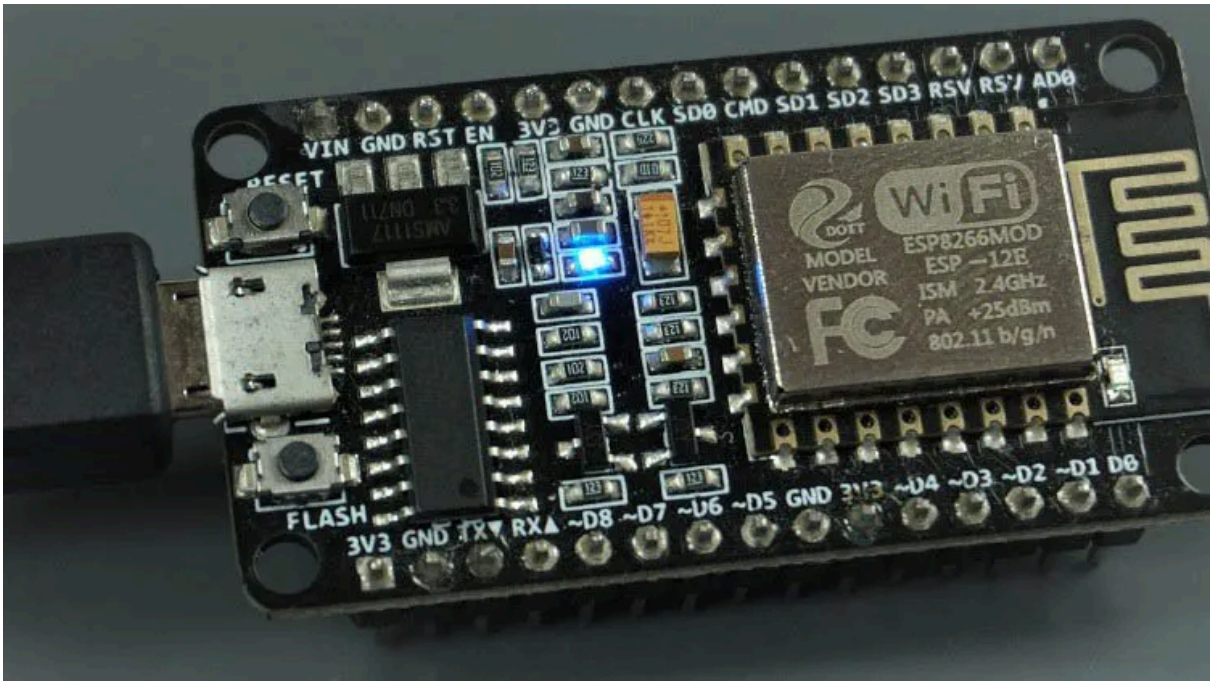

Pack de 3 baterias 18650 3.7v 2000mah



Servomotor MG995



Expansor de ESP32




Interruptor, tenemos 2




Conector DC

Cable para conectar el pack de baterías con el modulo de expansión, este se conecta al puerto dc 6.5 a 16v se usara para alimentar a la esp para hacerlo mas facil

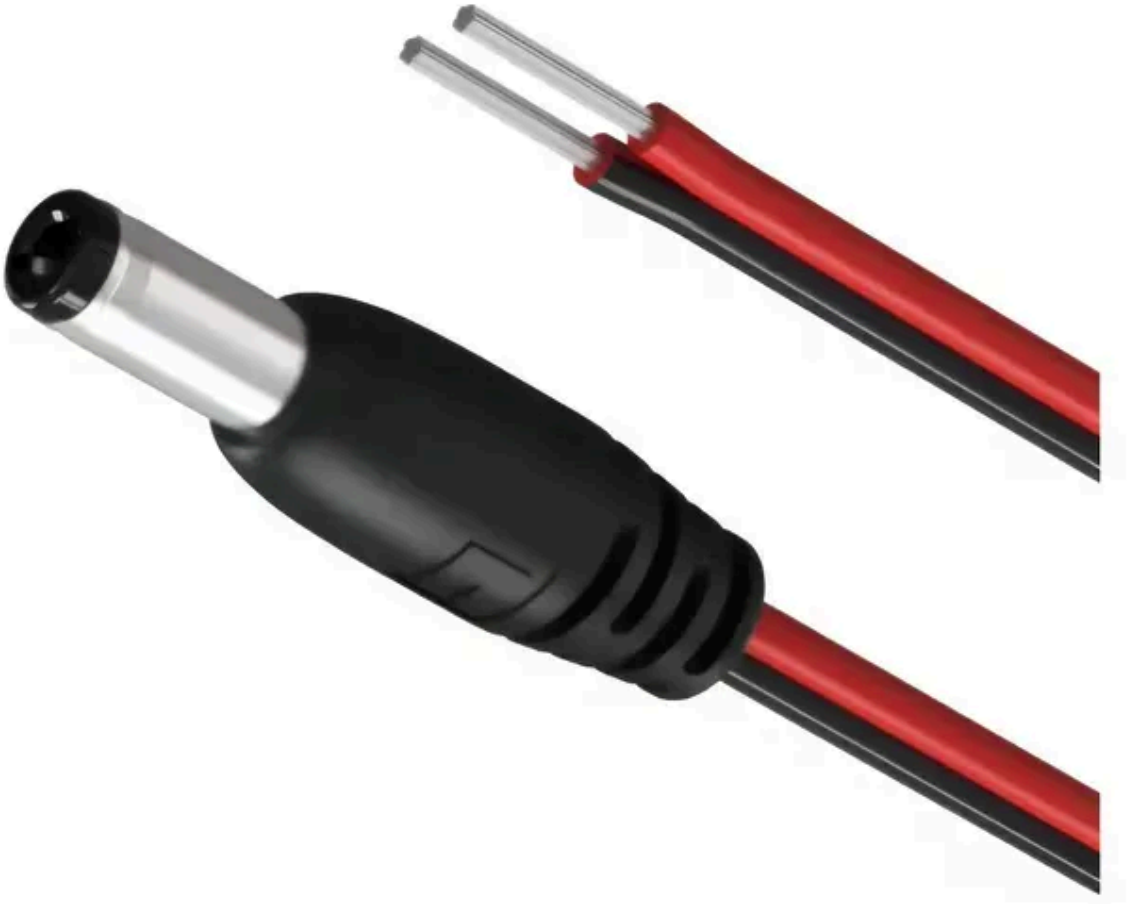

Tarjeta de expacion

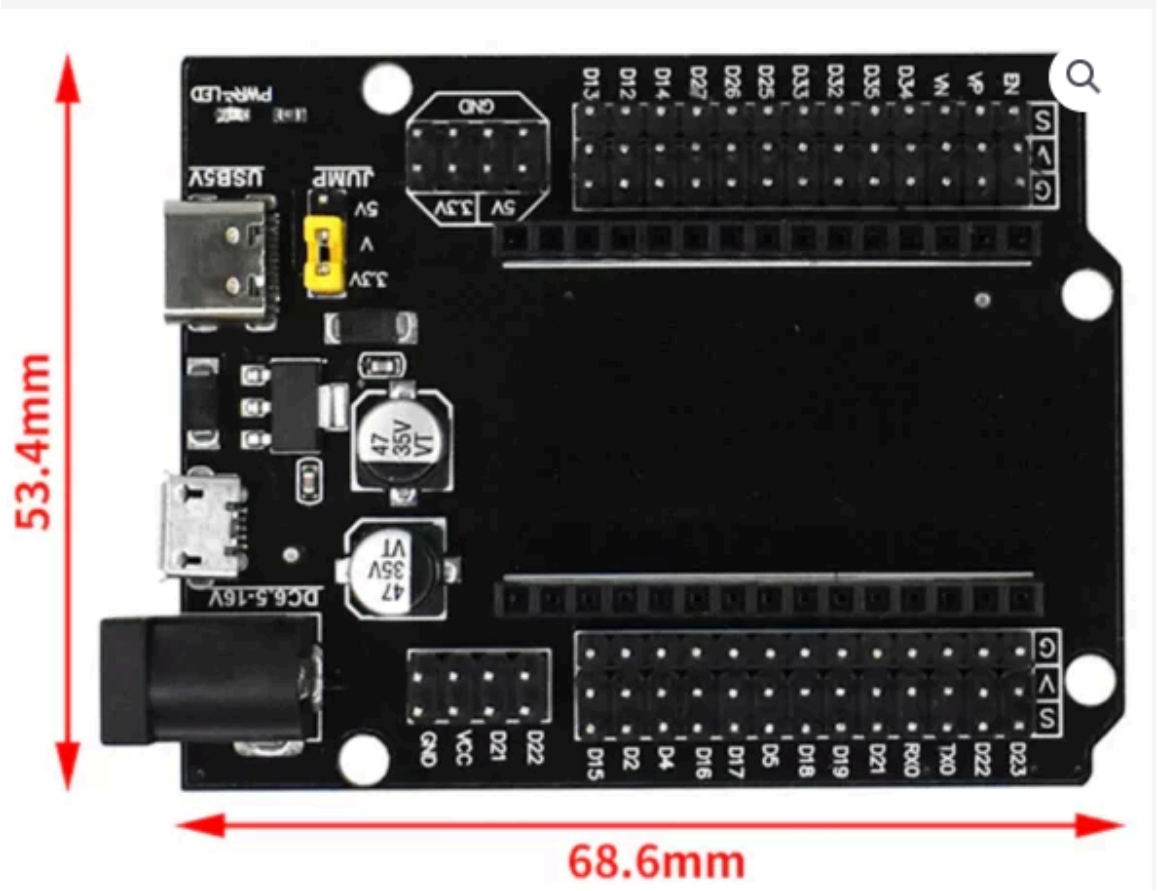

BATERIA 460mAh, 35 cell, 11.1v


TURNIGY
Nano-Tech
HIGH DISCHARGE LiPo BATTERY
450 mAh
VOLTAGE: 3 cell 11.1V
0.45

LM2596


IN+
IN-
OUT
470
100
50V
220
35V