Chapter 7 outline

- Introduction

Wireless

- Wireless links and network characteristics
- WiFi: 802.11 wireless LANs
- Cellular networks: 4G and 5G

Mobility

- Mobility management: principles
- Mobility management: practice
  - 4G/5G networks
  - Mobile IP
- Mobility: impact on higher-layer protocols

4G/5G cellular networks

- *the* solution for wide-area mobile Internet
- widespread deployment/use:
  - more mobile-broadband-connected devices than fixed-broadband-connected devices devices (5-1 in 2019)!
  - 4G availability: 97% of time in Korea (90% in US)
- transmission rates up to 100’s Mbps
- technical standards: 3rd Generation Partnership Project (3GPP)
  - wwww.3gpp.org
  - 4G: Long-Term Evolution (LTE)standard

4G/5G cellular networks

similarities to wired Internet

- edge/core distinction, but both below to same carrier
- global cellular network: a network of networks
- widespread use of protocols we've studied: HTTP, DNS, TCP, UDP, IP, NAT, separation of data/control planes, SDN, Ethernet, tunneling
- interconnected to wired Internet

differences from wired Internet

- different wireless link layer
- mobility as a 1st class service
- user "identity" (via SIM card)
- business model: users subscribe to a cellular provider
  - strong notion of "home network" versus roaming on visited nets
  - global access, with authentication infrastructure, and inter-carrier settlements

Elements of 4G LTE architecture

Mobile device:

- smartphone, tablet, laptop, IoT, ... with 4G LTE radio
- 64-bit International Mobile Subscriber Identity (IMSI), stored on SIM (Subscriber Identity Module) card
- LTE jargon: User Equipment (UE)

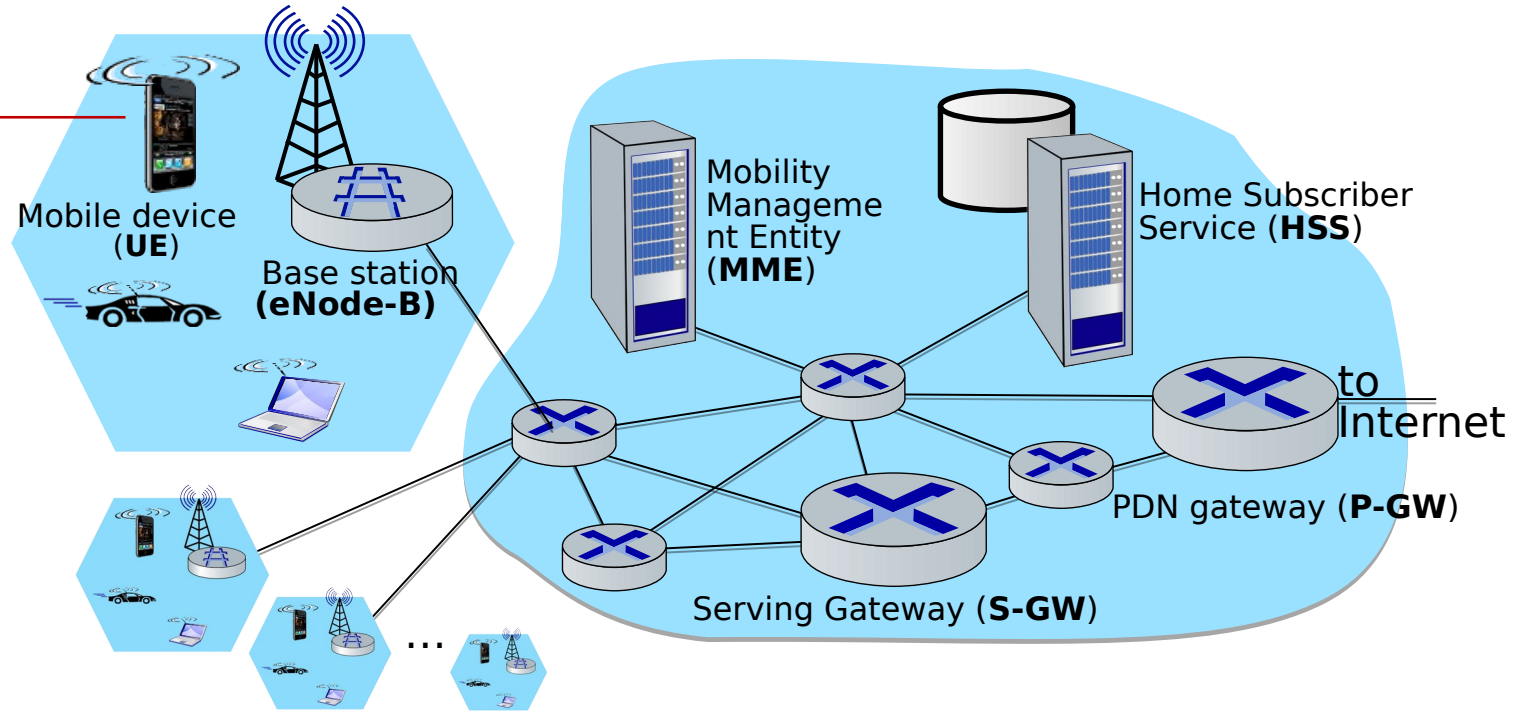

Elements of 4G LTE architecture

Base station:

- at “edge” of carrier’s network
- manages wireless radio resources, mobile devices in its coverage area (“cell”)
- coordinates device authentication with other elements
- similar to WiFi AP but:
  - active role in user mobility
  - coordinates with nearly base stations to optimize radio use
- LTE jargon: eNode-B

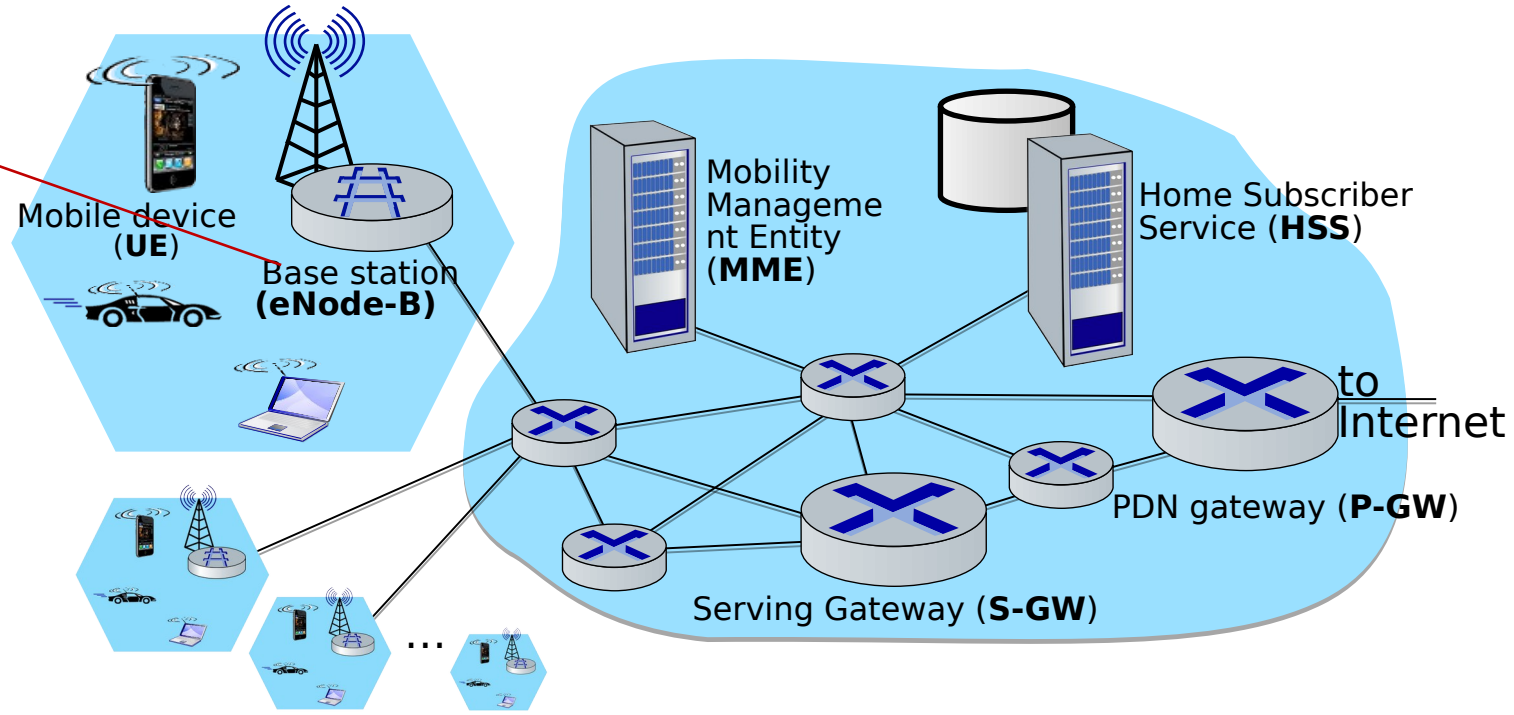

Elements of 4G LTE architecture

Home Subscriber Service

- stores info about mobile devices for which the HSS's network is their "home network"
- works with MME in device authentication

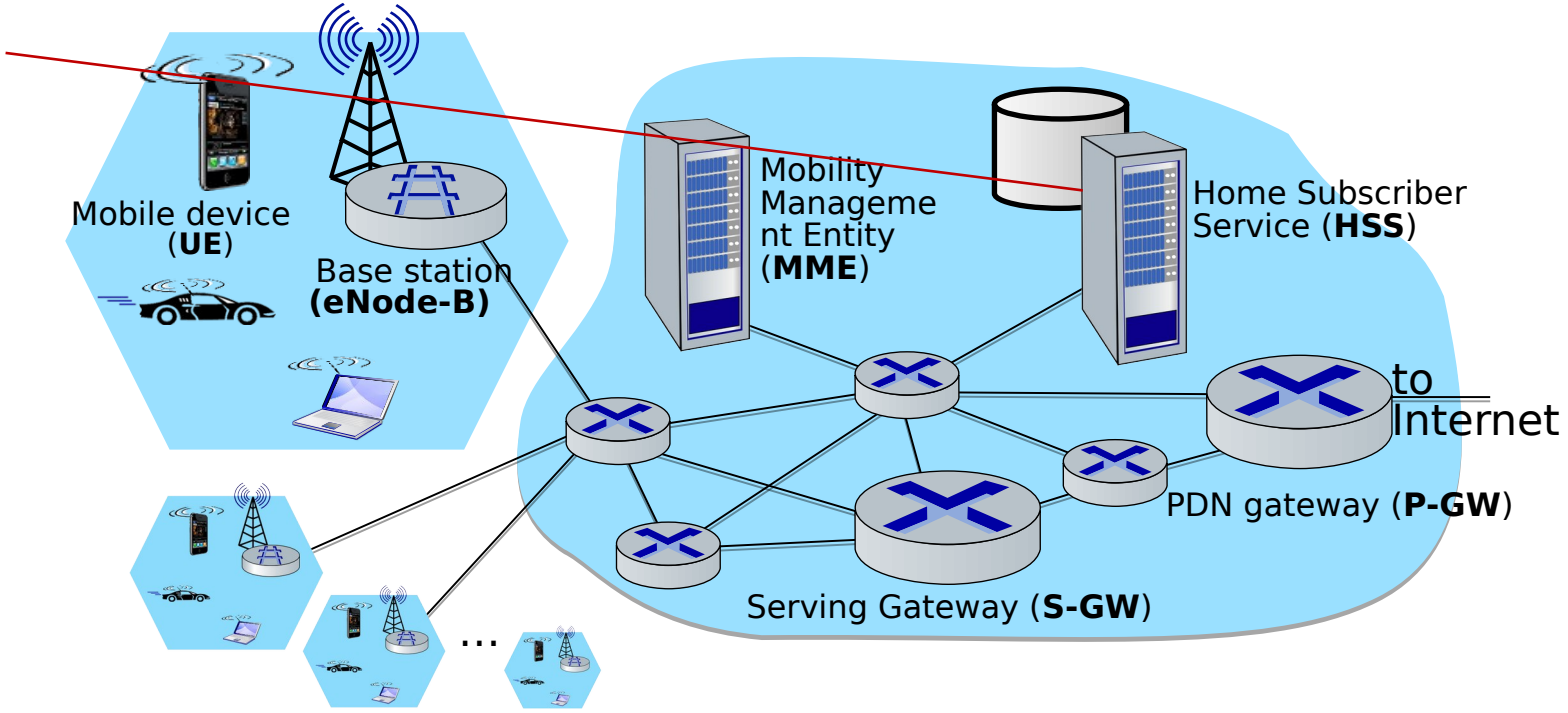

Elements of 4G LTE architecture

Serving Gateway (S-GW), PDN Gateway (P-GW)

- lie on data path from mobile to/from Internet
- P-GW
  - gateway to mobile cellular network
  - Looks like any other internet gateway router
  - provides NAT services
- other routers:
  - extensive use of tunneling

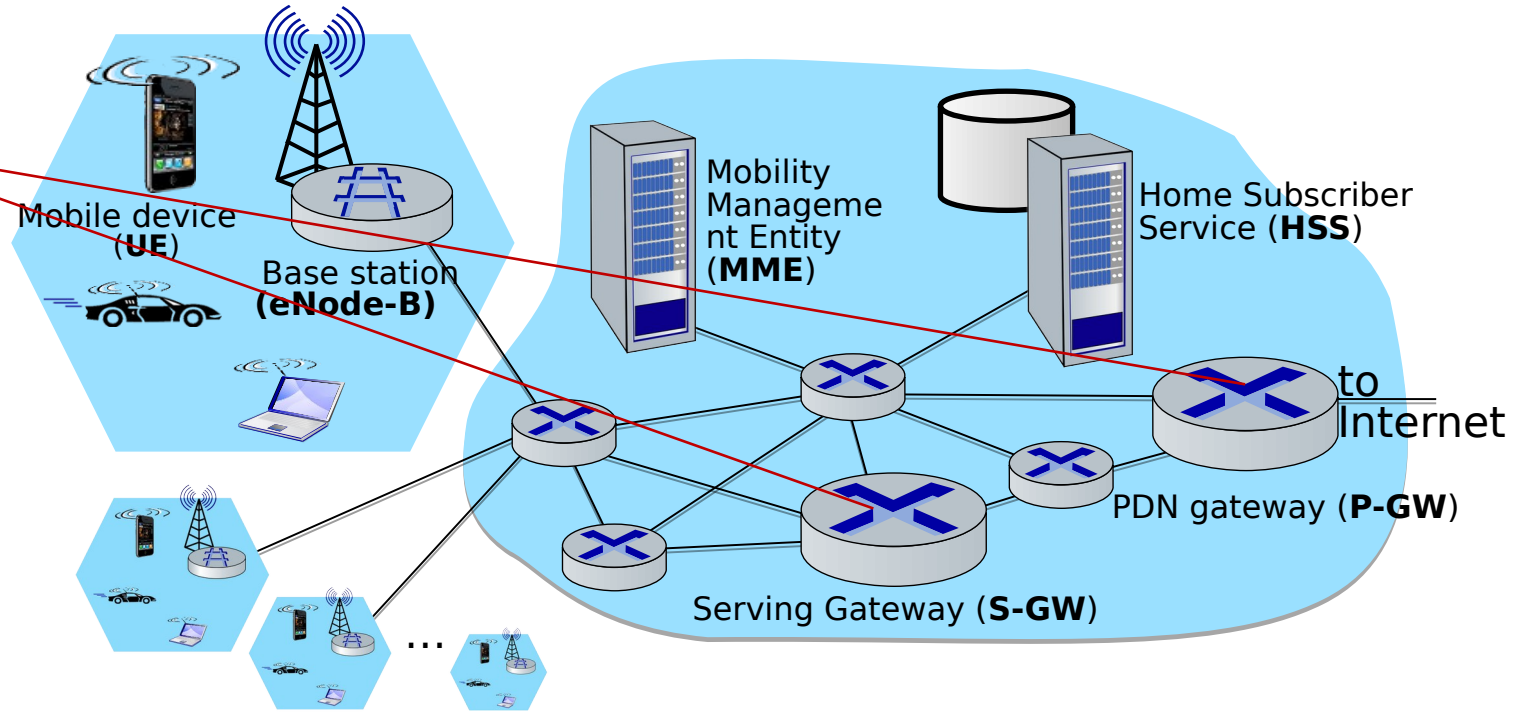

Elements of 4G LTE architecture

Mobility Management Entity

- device authentication (device-to-network, network-to-device) coordinated with mobile home network HSS
- mobile device management:
  - device handover between cells
  - tracking/paging device location
- path (tunneling) setup from mobile device to P-GW

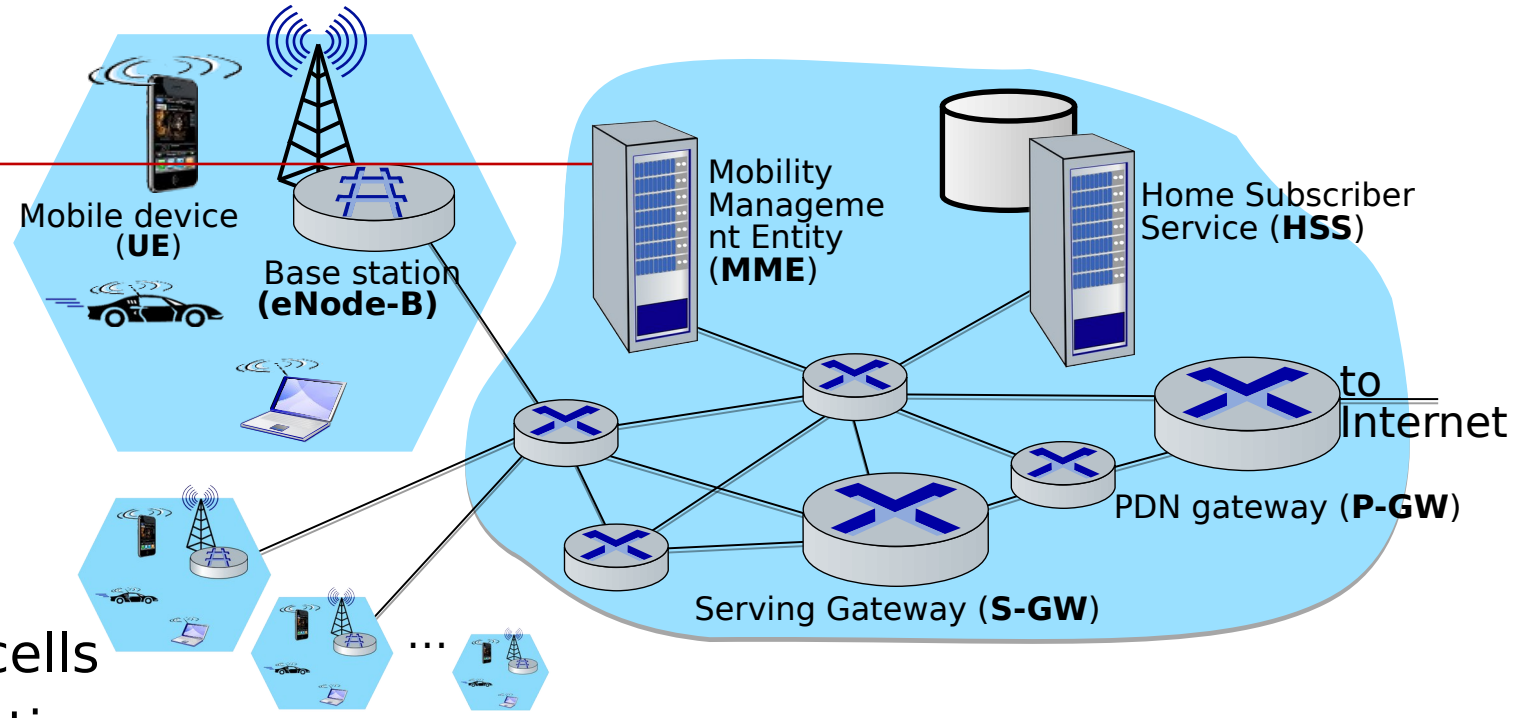

LTE: data plane control plane separation

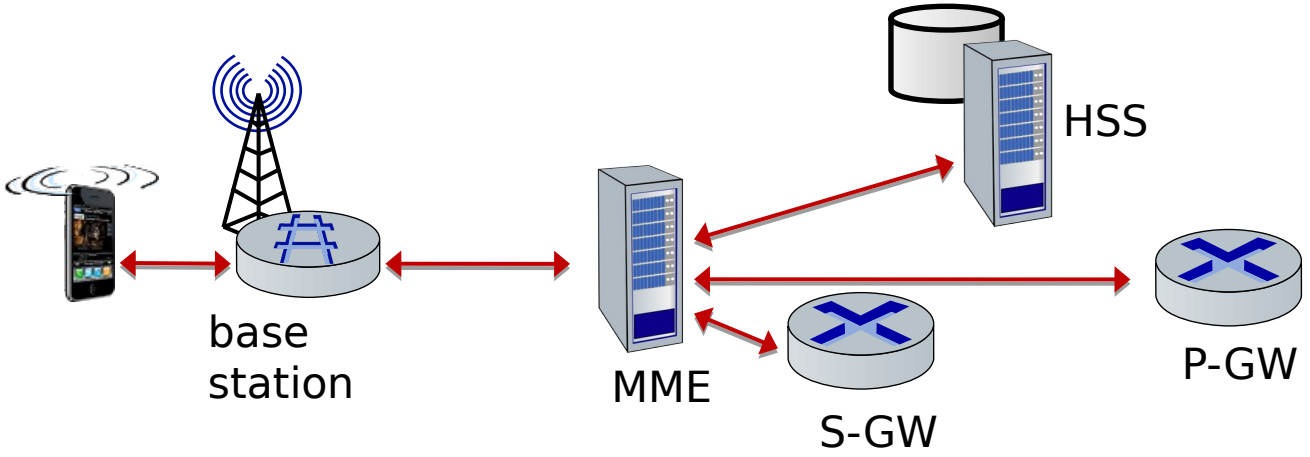

control plane

- new protocols for mobility management , security, authentication (later)

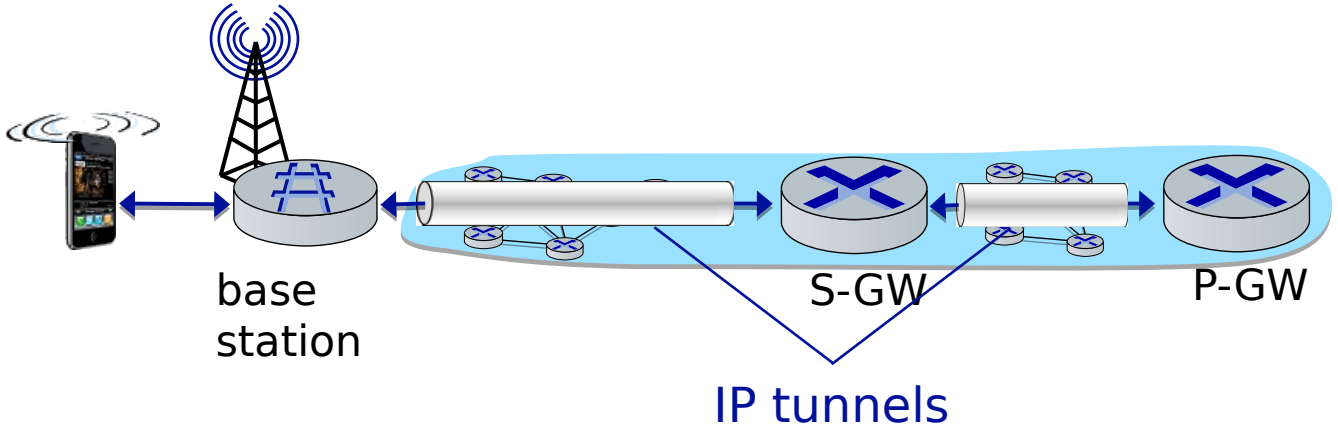

data plane

- new protocols at link, physical layers
- extensive use of tunneling to facilitate mobility

LTE: data plane control plane separation

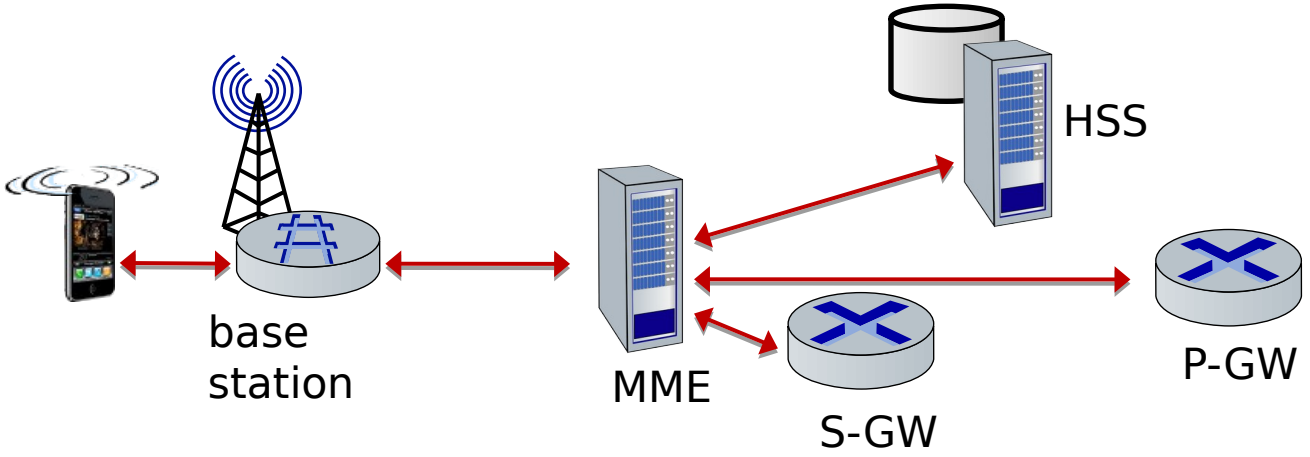

control plane

- new protocols for mobility management , security, authentication (later)

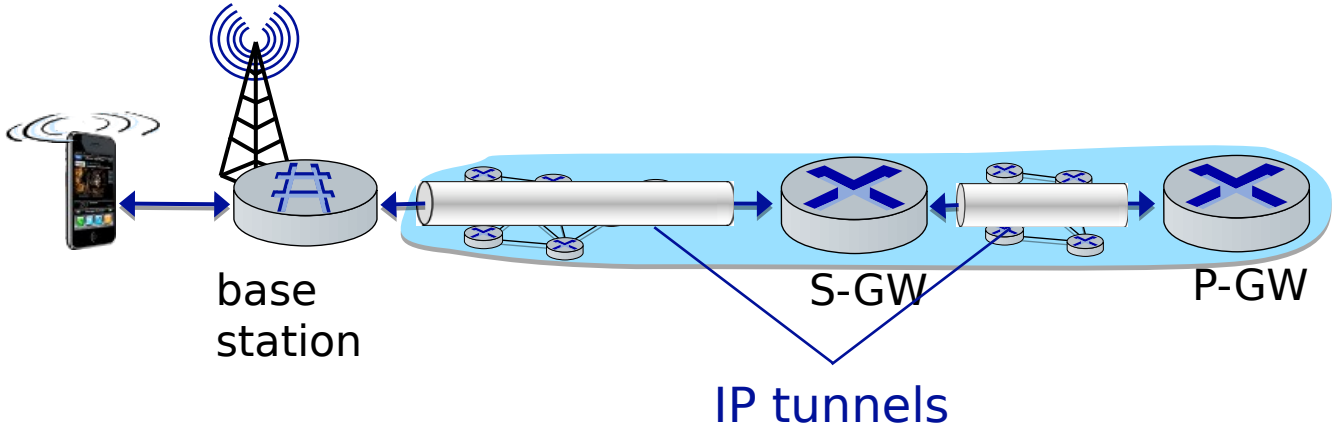

data plane

- new protocols at link, physical layers
- extensive use of tunneling to facilitate mobility

LTE data plane protocol stack: first hop

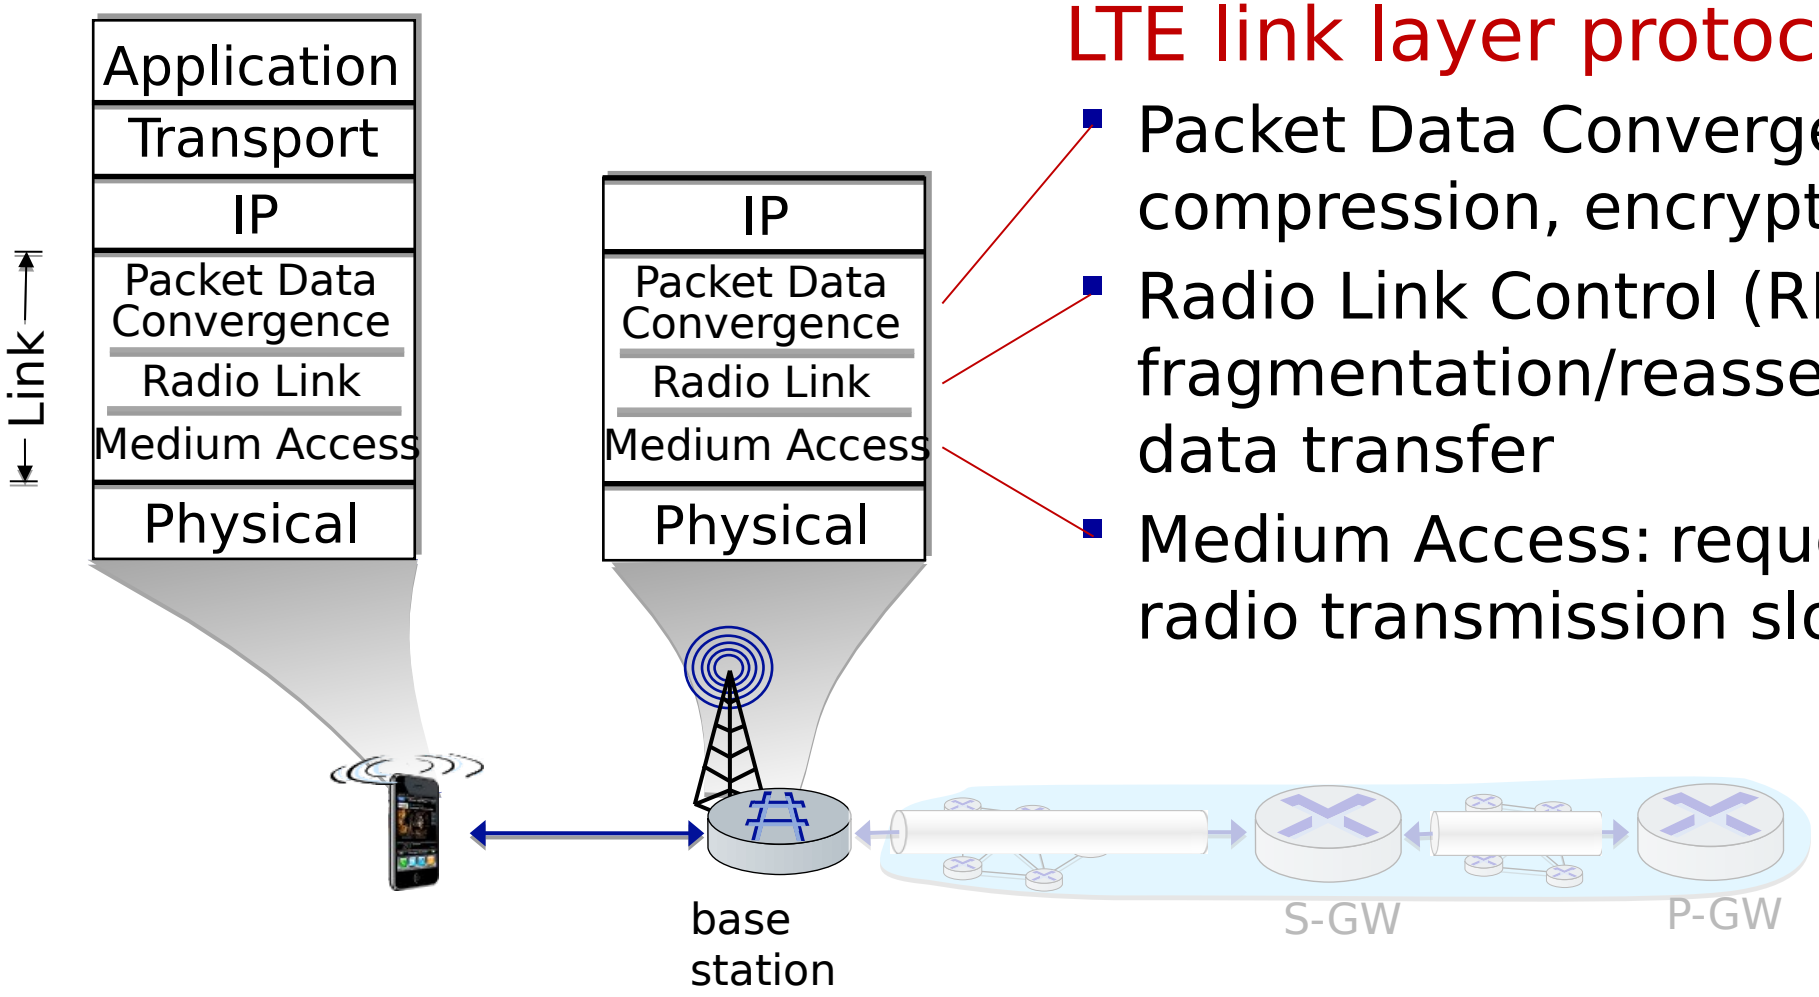

LTE link layer protocols:

- Packet Data Convergence: header compression, encryption
- Radio Link Control (RLC) Protocol: fragmentation/reassembly, reliable data transfer
- Medium Access: requesting, use of radio transmission slots

LTE data plane protocol stack: first hop

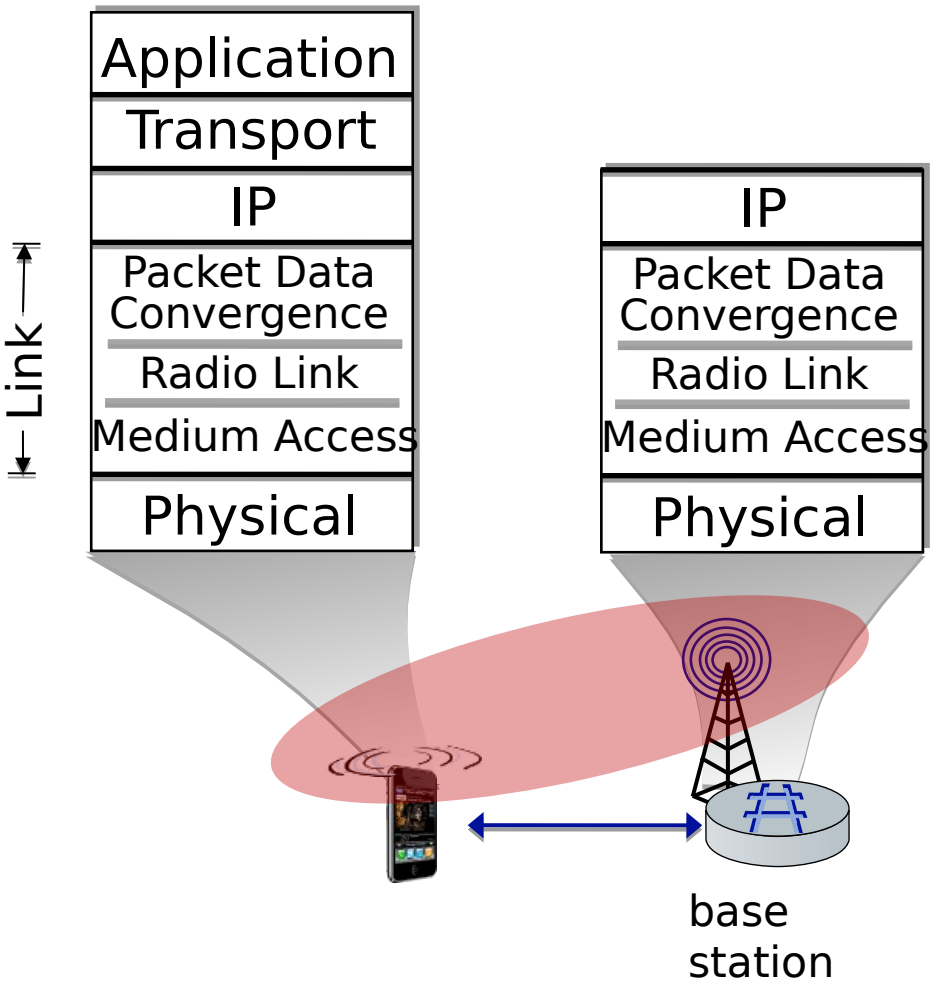

LTE radio access network:

- downstream channel: FDM, TDM within frequency channel (OFDM - orthogonal frequency division multiplexing)
  - "orthogonal": minimal interference between channels
  - upstream: FDM, TDM similar to OFDM
- each active mobile device allocated two or more 0.5 ms time slots over 12 frequencies
  - scheduling algorithm not standardized – up to operator
  - 100's Mbps per device possible

LTE data plane protocol stack: packet core

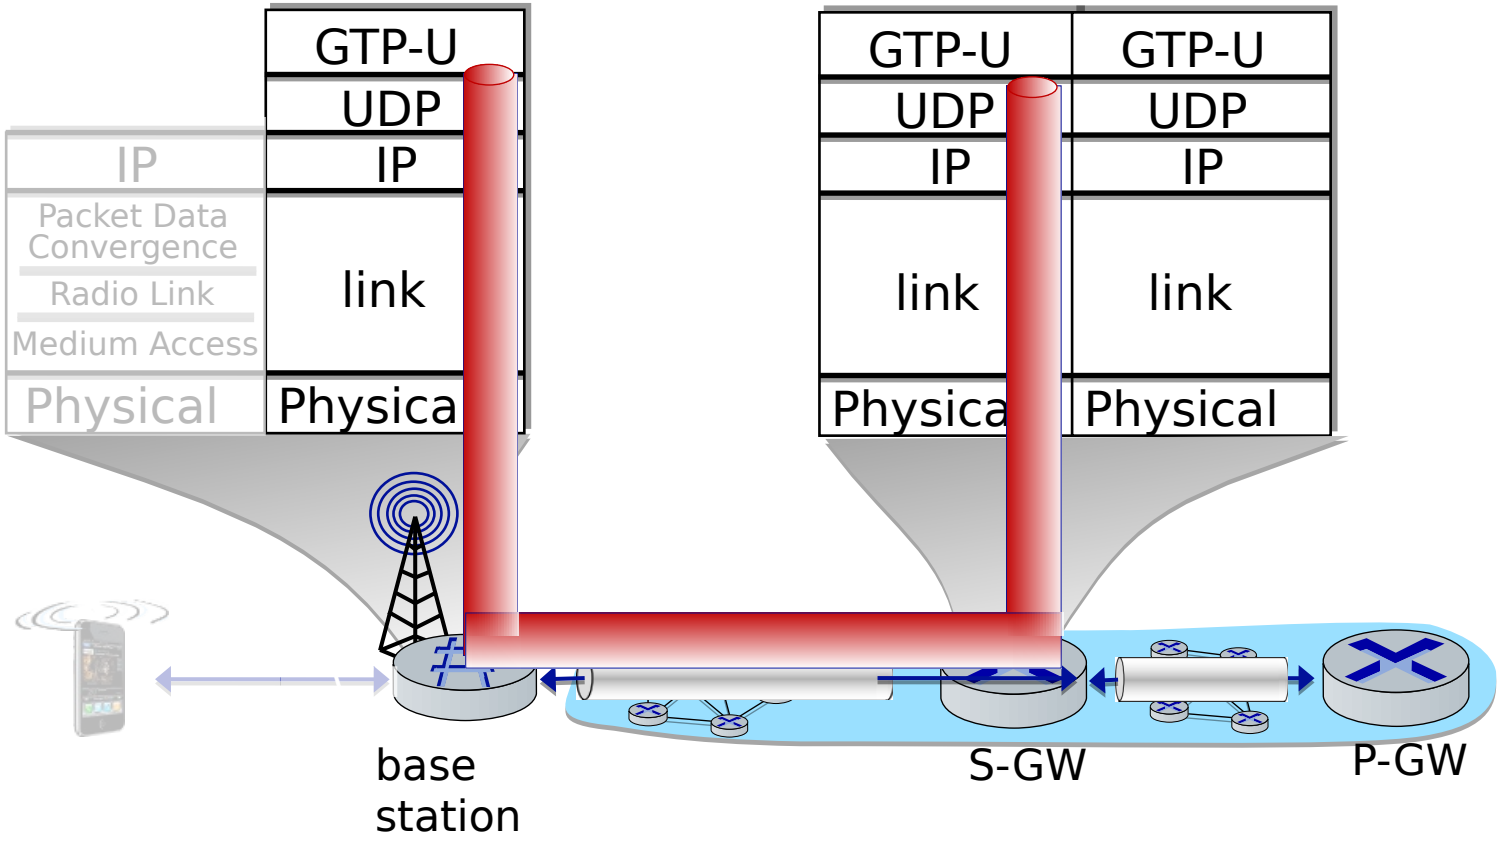

tunneling:

- mobile datagram encapsulated using GPRS Tunneling Protocol (GTP), sent inside UDP datagram to S-GW
- S-GW re-tunnels datagrams to P-GW
- supporting mobility: only tunneling endpoints change when mobile user moves

LTE data plane: associating with a BS

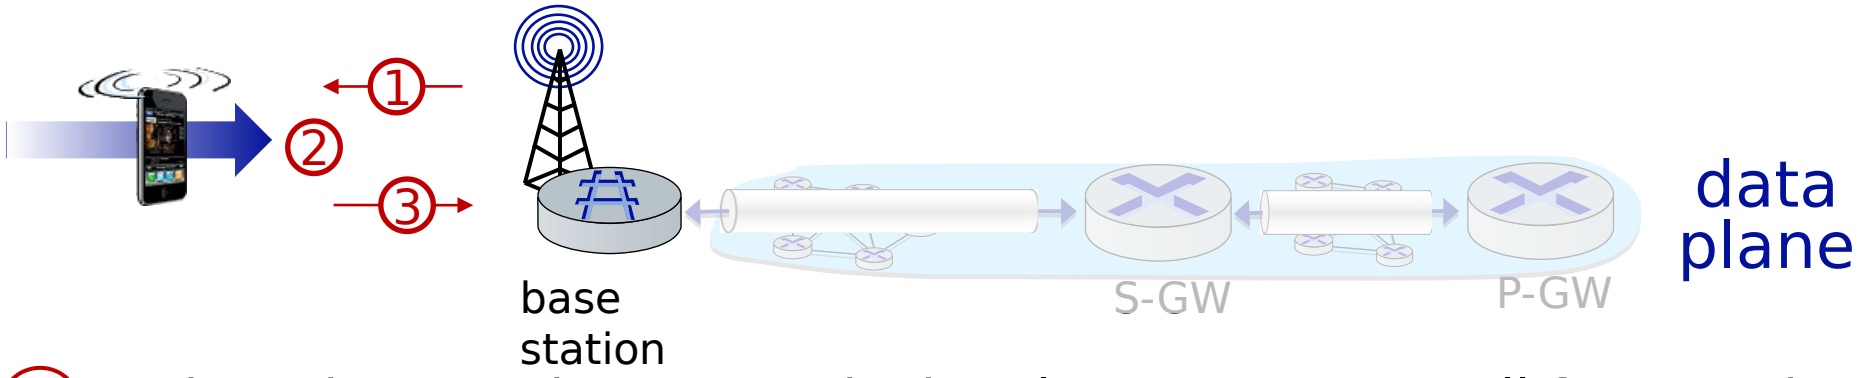

① BS broadcasts primary synch signal every 5 ms on all frequencies
- BSs from multiple carriers may be broadcasting synch signals

② mobile finds a primary synch signal, then locates 2nd synch signal on this freq.
- mobile then finds info broadcast by BS: channel bandwidth, configurations; BS's cellular carrier info
- mobile may get info from multiple base stations, multiple cellular networks

③ mobile selects which BS to associate with (*e.g.,* preference for home carrier)

④ more steps still needed to authenticate, establish state, set up data plane

LTE mobiles: sleep modes

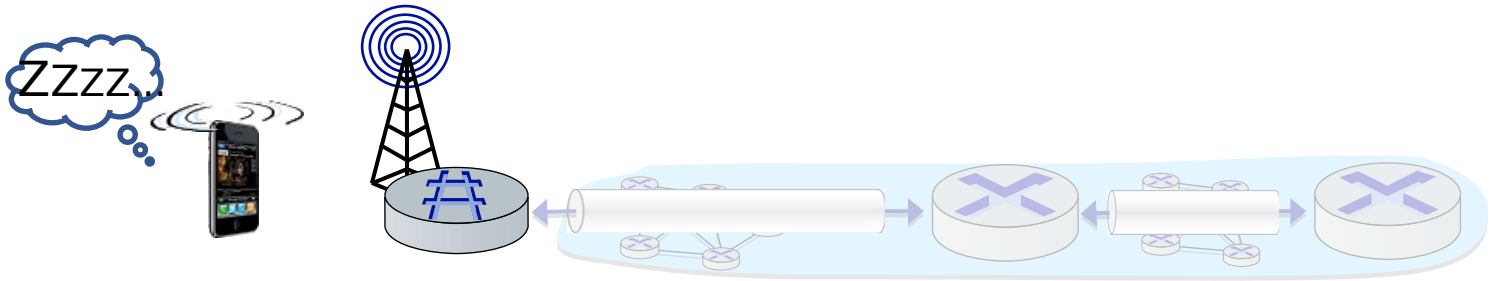

as in WiFi, Bluetooth: LTE mobile may put radio to “sleep” to conserve battery:

- light sleep: after 100’s msec of inactivity
  - wake up periodically (100’s msec) to check for downstream transmissions
- deep sleep: after 5-10 secs of inactivity
  - mobile may change cells while deep sleeping – need to re-establish association

Global cellular network: a network of IP networks

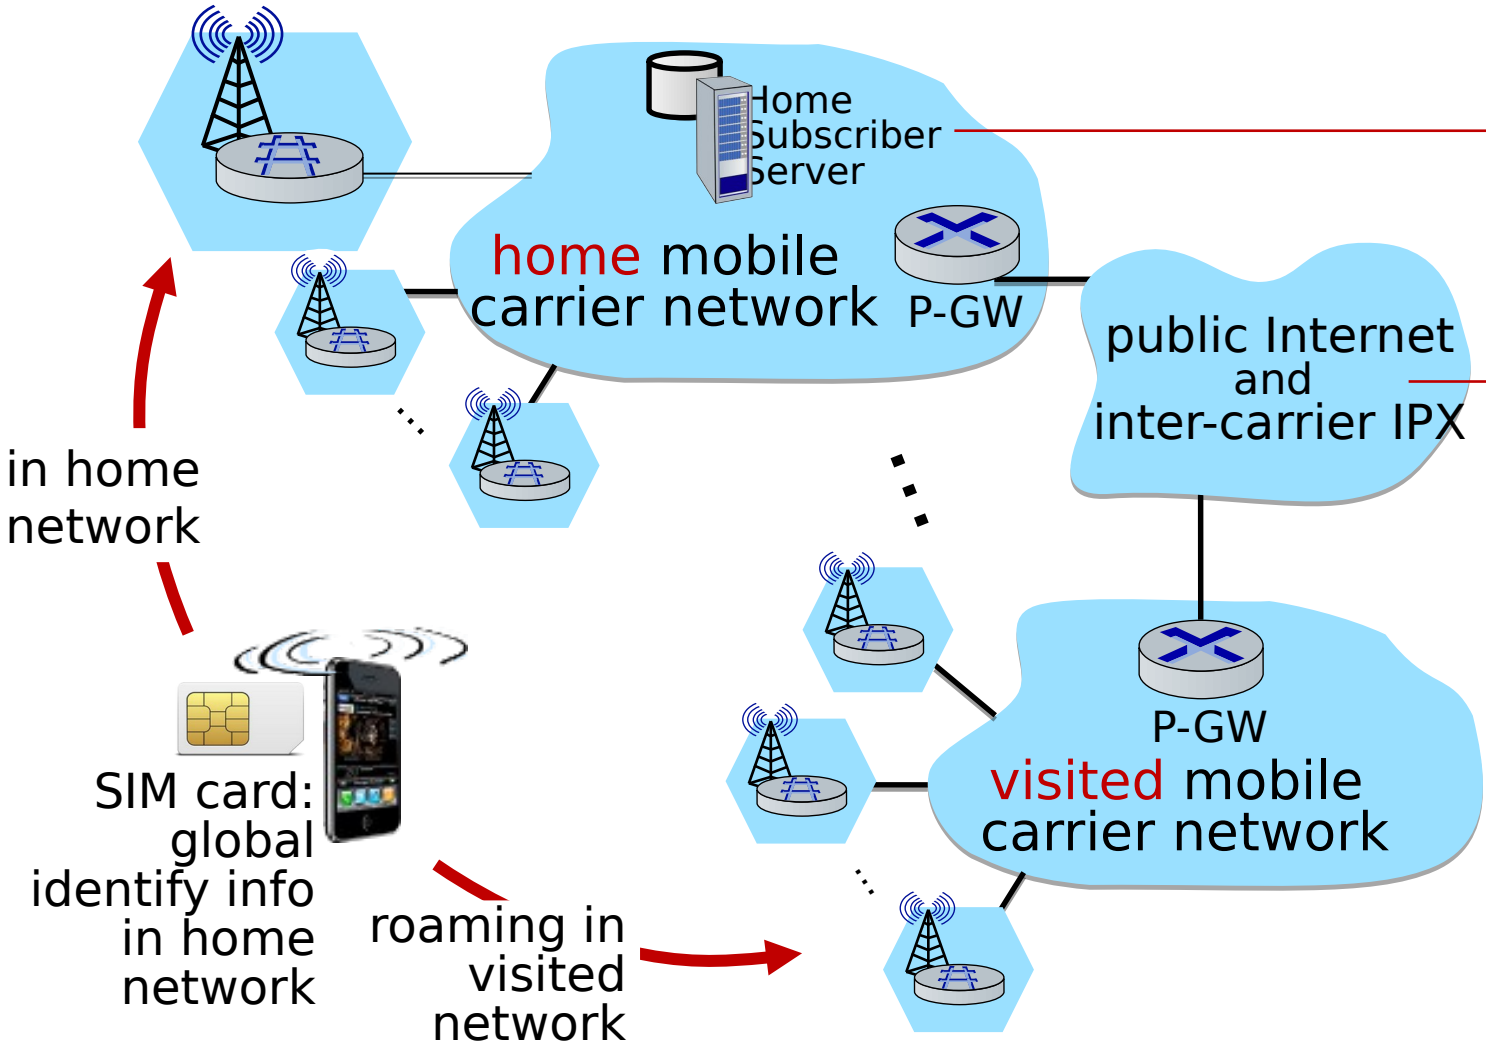

home network HSS:

- identify & services info, while in home network and roaming

all IP:

- carriers interconnect with each other, and public internet at exchange points
- legacy 2G, 3G: not all IP, handled otherwise

On to 5G!

- goal: 10x increase in peak bitrate, 10x decrease in latency, 100x increase in traffic capacity over 4G
- 5G NR (new radio):
  - two frequency bands: FR1 (450 MHz–6 GHz) and FR2 (24 GHz–52 GHz): millimeter wave frequencies
  - not backwards-compatible with 4G
  - MIMO: multiple directional antennae
- millimeter wave frequencies: much higher data rates, but over shorter distances
  - pico-cells: cells diameters: 10-100 m
  - massive, dense deployment of new base stations required

Chapter 7 outline

- Introduction

Wireless

- Wireless links and network characteristics
- WiFi: 802.11 wireless LANs
- Cellular networks: 4G and 5G

Mobility

- Mobility management: principles
- Mobility management: practice
  - 4G/5G networks
  - Mobile IP
- Mobility: impact on higher-layer protocols

What is mobility?

- spectrum of mobility, from the network perspective:

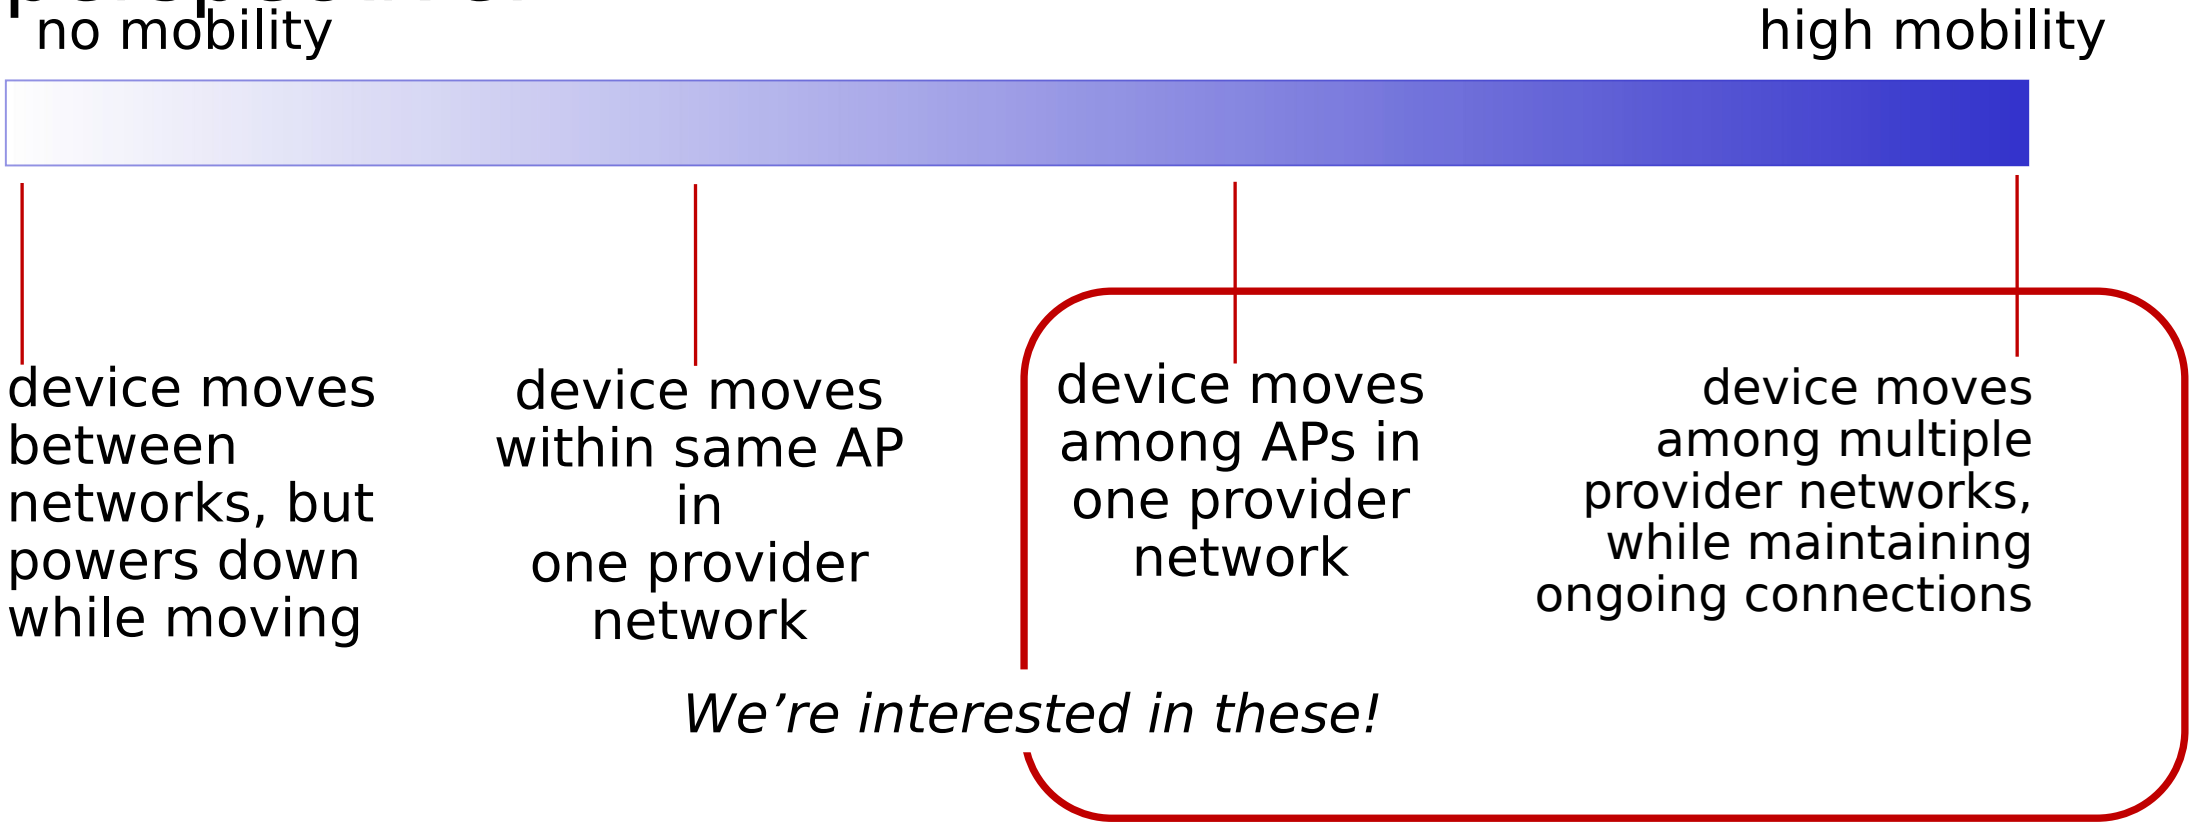

Mobility approaches

- let network (routers) handle it:
  - routers advertise well-known name, address (e.g., permanent 32-bit IP address), or number (e.g., cell #) of visiting mobile node via usual routing table exchange
  - Internet routing could do this already *with no* changes! Routing tables indicate where each mobile located via longest prefix match!

Mobility approaches

- let network (routers) handle it:
  - routers advertise well-kn… me, address (e.g., permanent 32-bit IP address), or n… cell #) of visiting mobile node via usual routing … nge
  - Internet routing could d… dy *with no* changes! Routing tables indicate where eac… le located via longest prefix match!

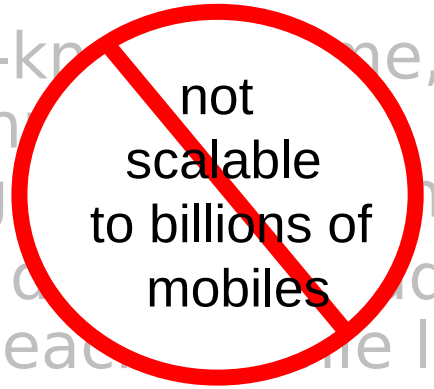

- let end-systems handle it: functionality at the “edge”
  - *indirect routing:* communication from correspondent to mobile goes through home network, then forwarded to remote mobile
  - *direct routing:* correspondent gets foreign address of mobile, send directly to mobile

Contacting a mobile friend:

Consider friend frequently changing locations, how do you find him/her?

- search all phone books?
- expect her to let you know where he/she is?
- call his/her parents?
- Facebook!

The importance of having a “home”:

- a definitive source of information about you
- a place where people can find out where you are

Home network, visited network: 4G/5G

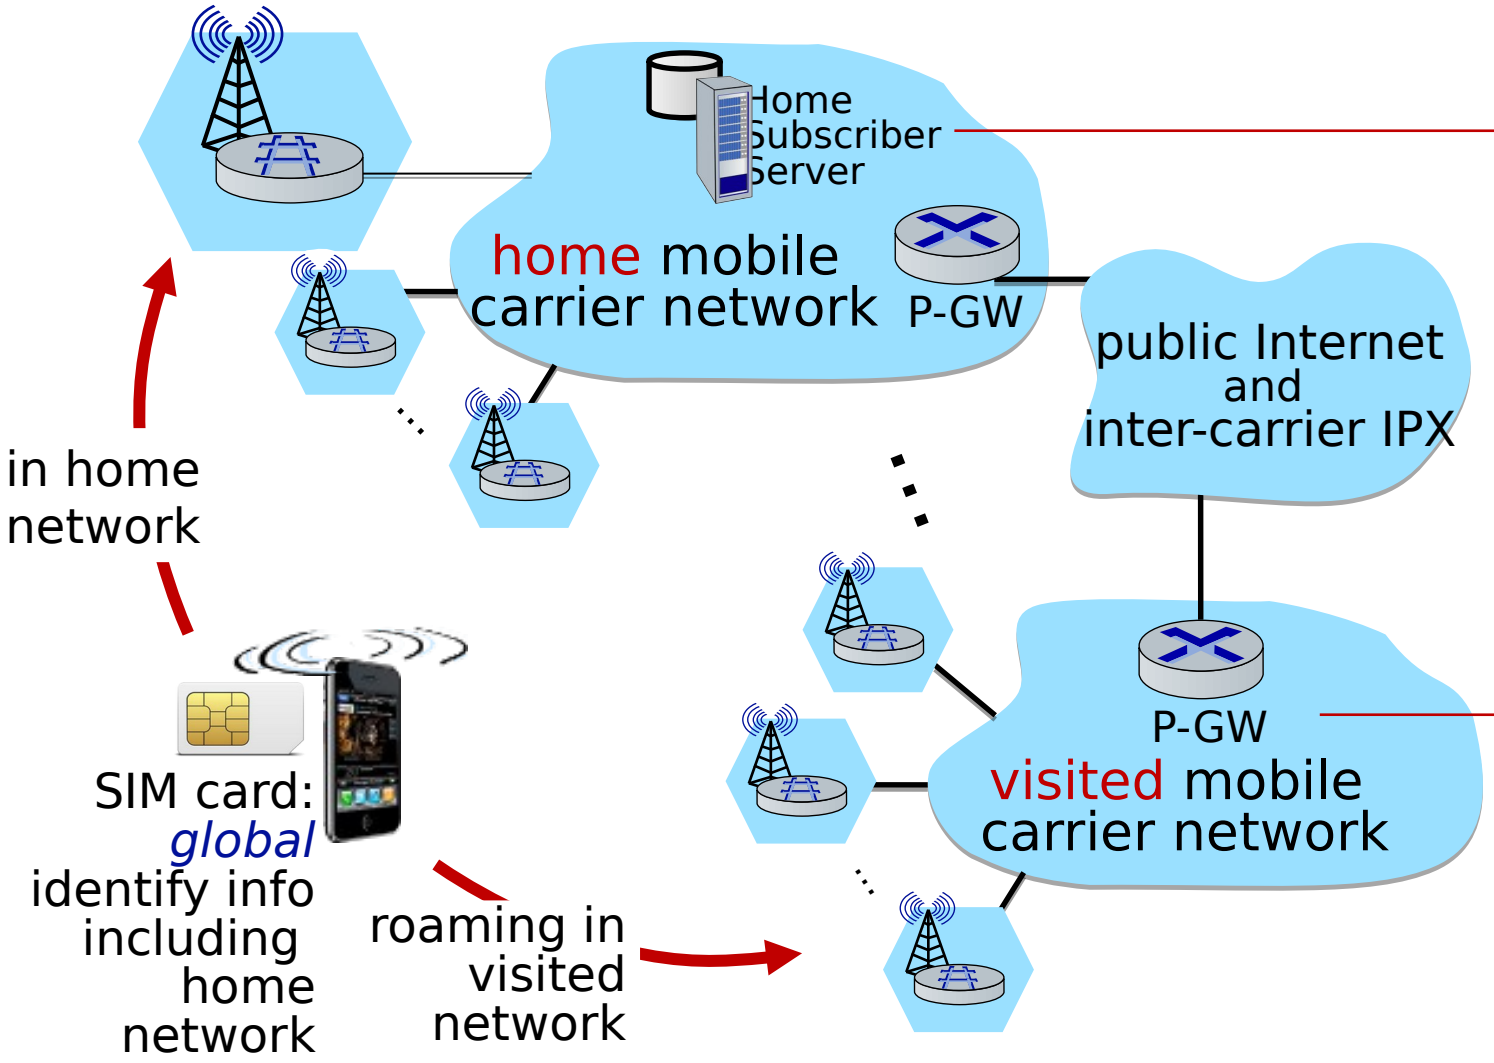

home network:

- (paid) service plan with cellular provider, e.g., TIM, Vodafone
- home network HSS stores identify & services info

visited network:

- any network other than your home network
- service agreement with other networks: to provide access to visiting mobile

Home network, visited network: ISP/WiFi

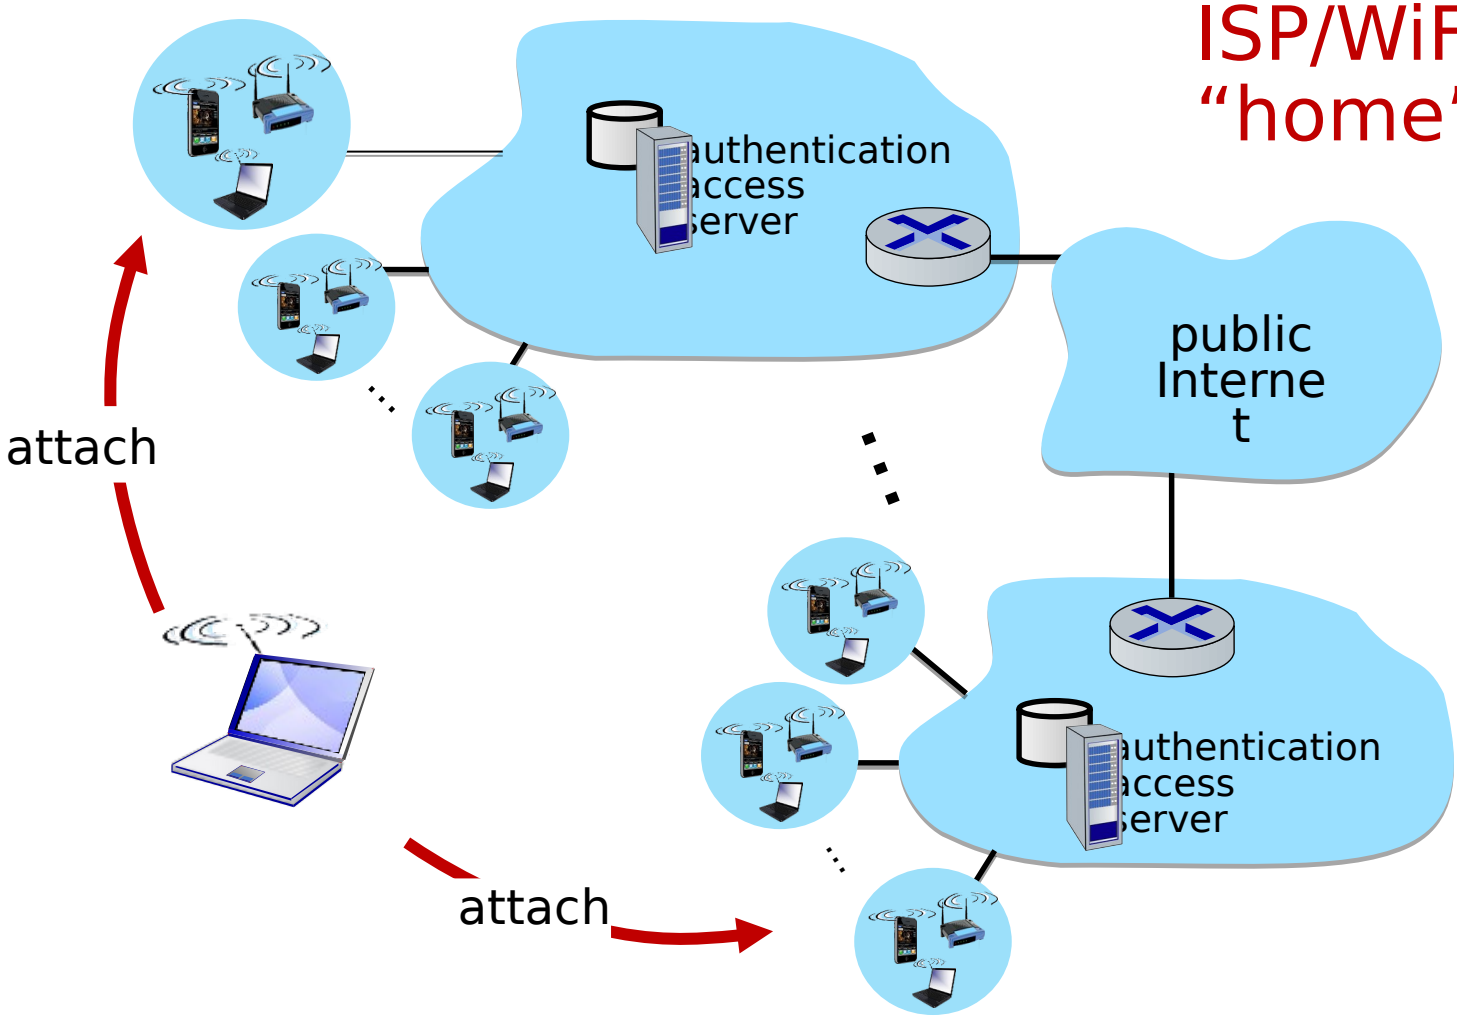

ISP/WiFi: no notion of global "home"

- credentials from ISP (e.g., username, password) stored on device or with user
- ISPs may have national, international presence
- different networks: different credentials
  - some exceptions (e.g., eduroam)
  - architectures exist (mobile IP) for 4G-like mobility, but not used

Home network, visited network: generic

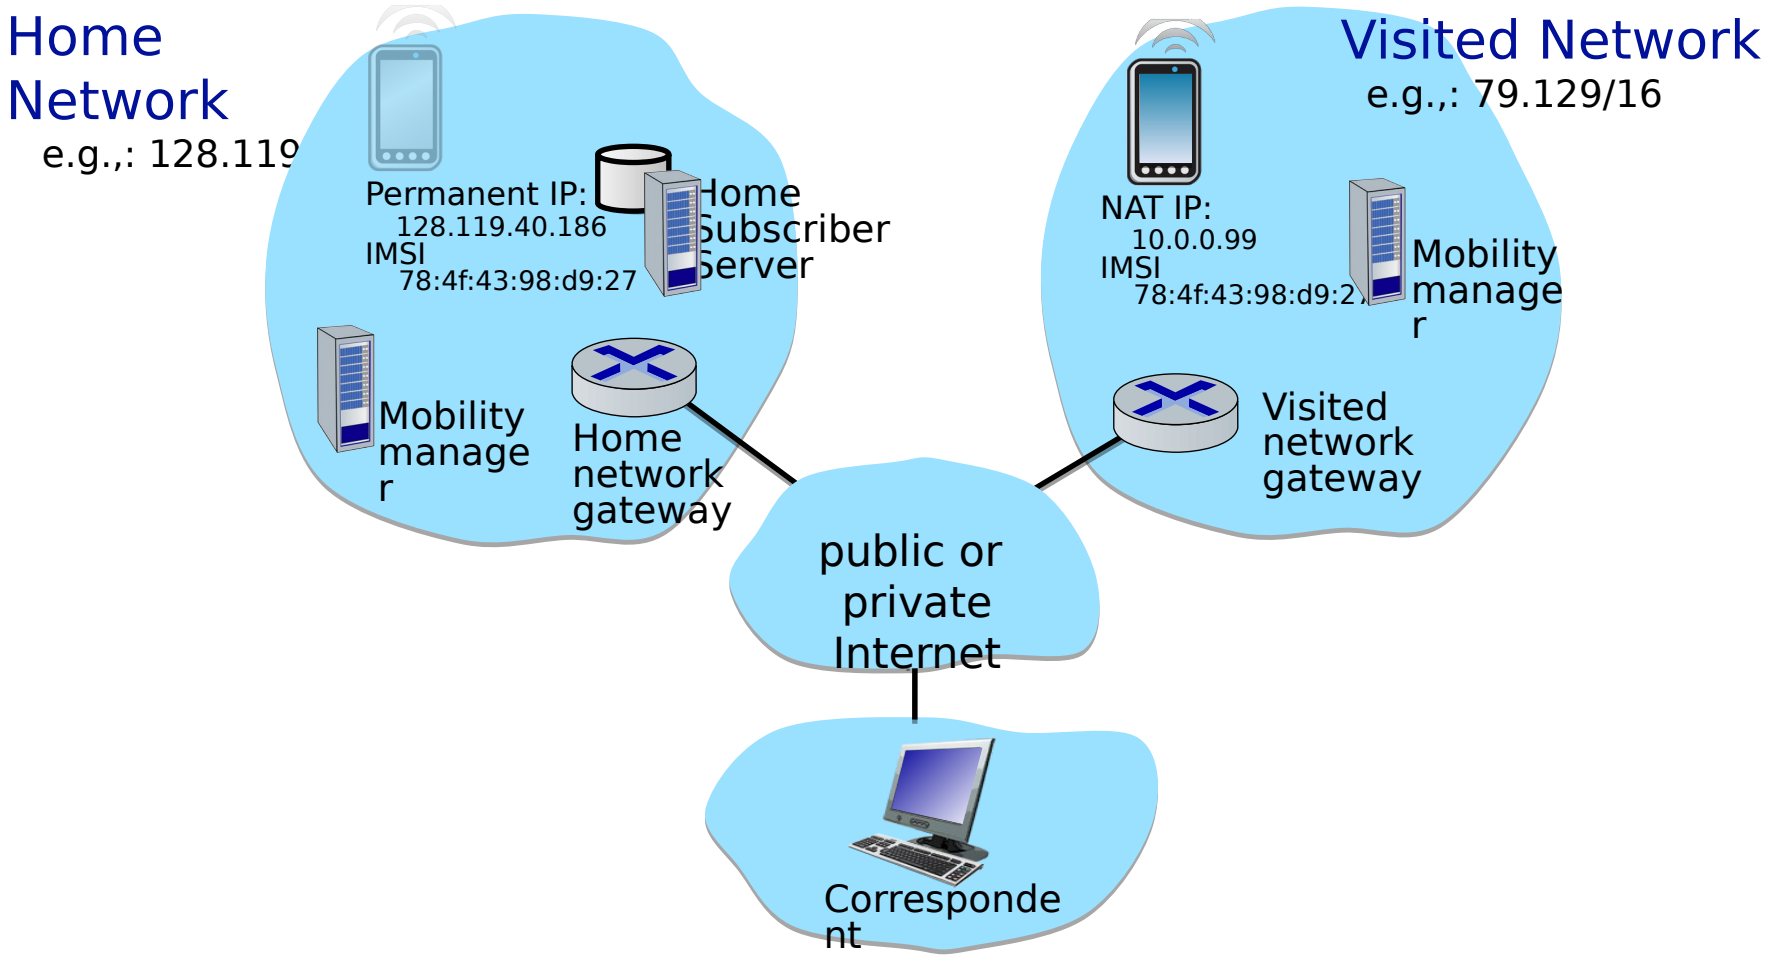

Registration: home needs to know where you are!

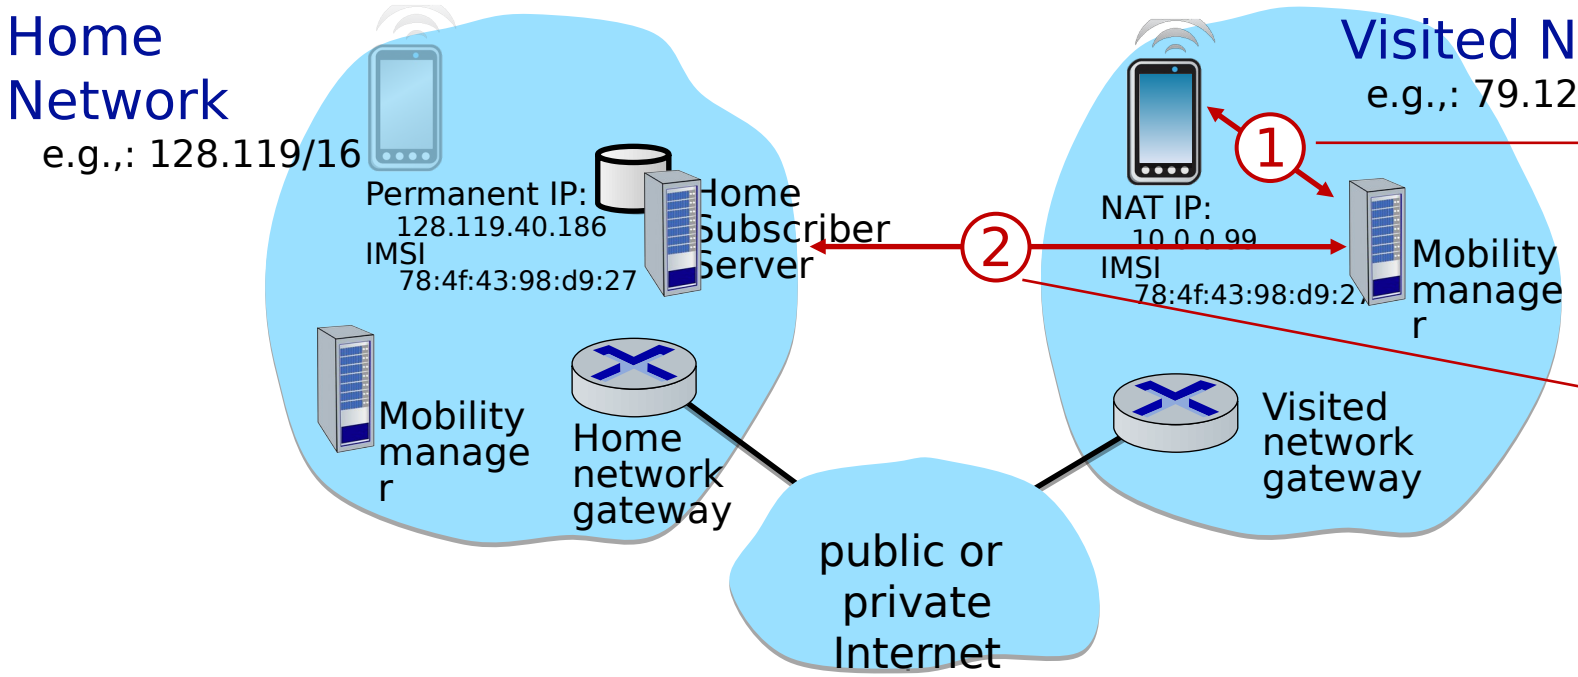

mobile *associates* with visited mobility manager

visited mobility manager *registers* mobile's location with home HSS

end result:

- visited mobility manager knows about mobile
- home HSS knows location of mobile

Mobility with indirect routing

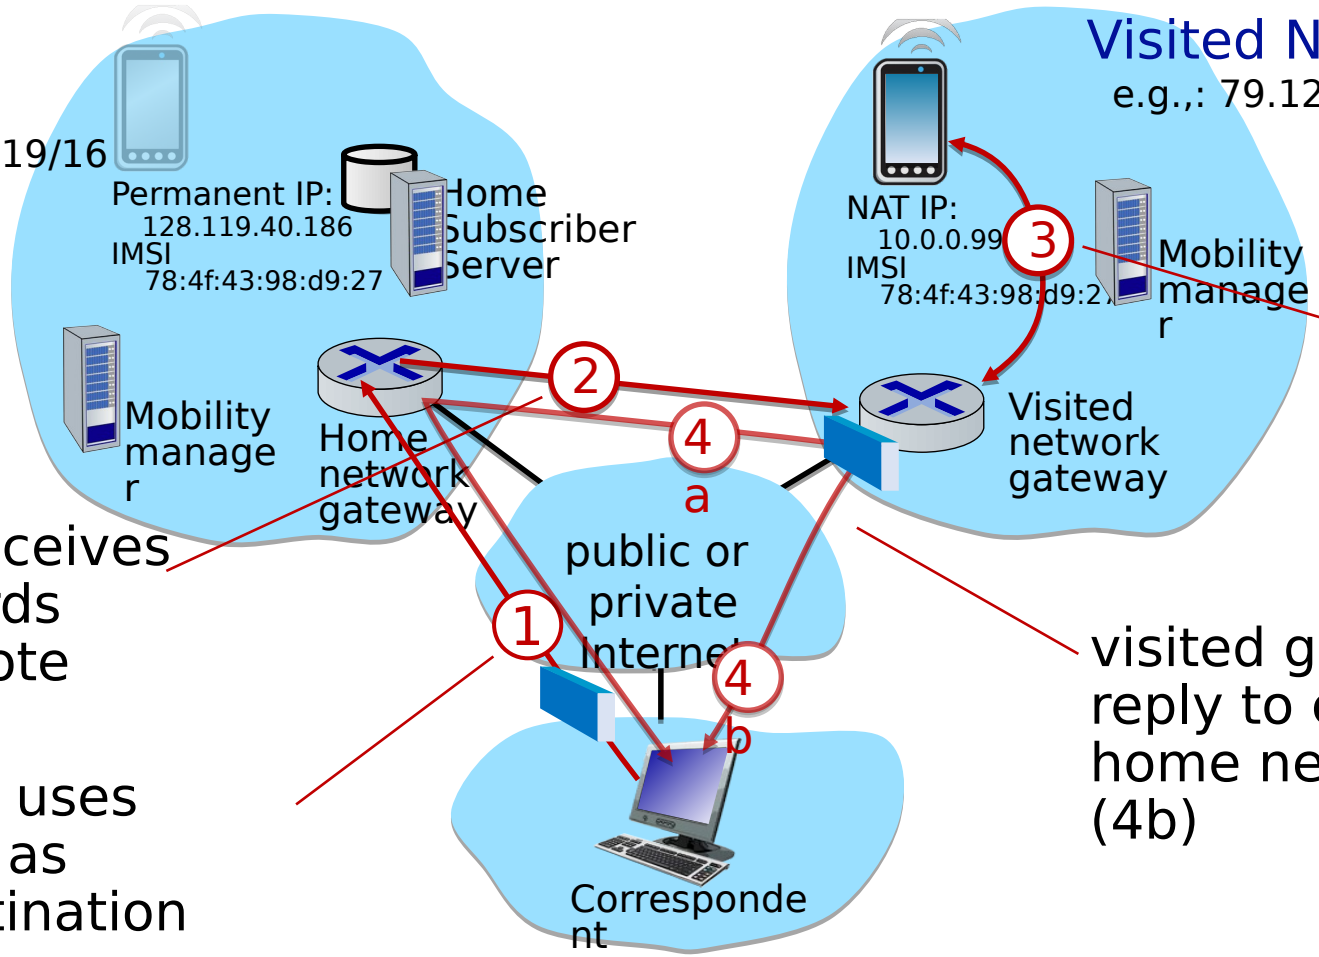

visited gateway router forwards to mobile

home gateway receives datagram, forwards (tunnels) to remote gateway

correspondent uses *home* address as datagram destination address

visited gateway router forwards reply to correspondent via home network (4a) or directly (4b)

Mobility with indirect routing: comments

- triangle routing:
  - inefficient when correspondent and mobile are in same network

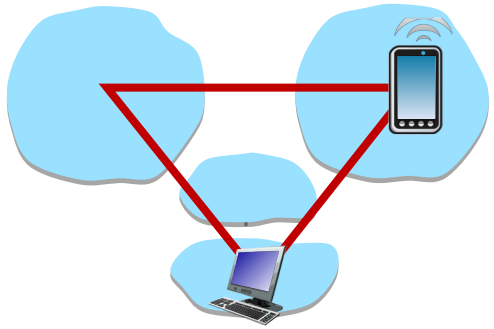

- mobile moves among visited networks: transparent to correspondent!
  - registers in new visited network
  - new visited network registers with home HSS
  - datagrams continue to be forwarded from home network to mobile in new network
  - *on-going (e.g., TCP) connections between correspondent and mobile can be maintained!*

Mobility with direct routing

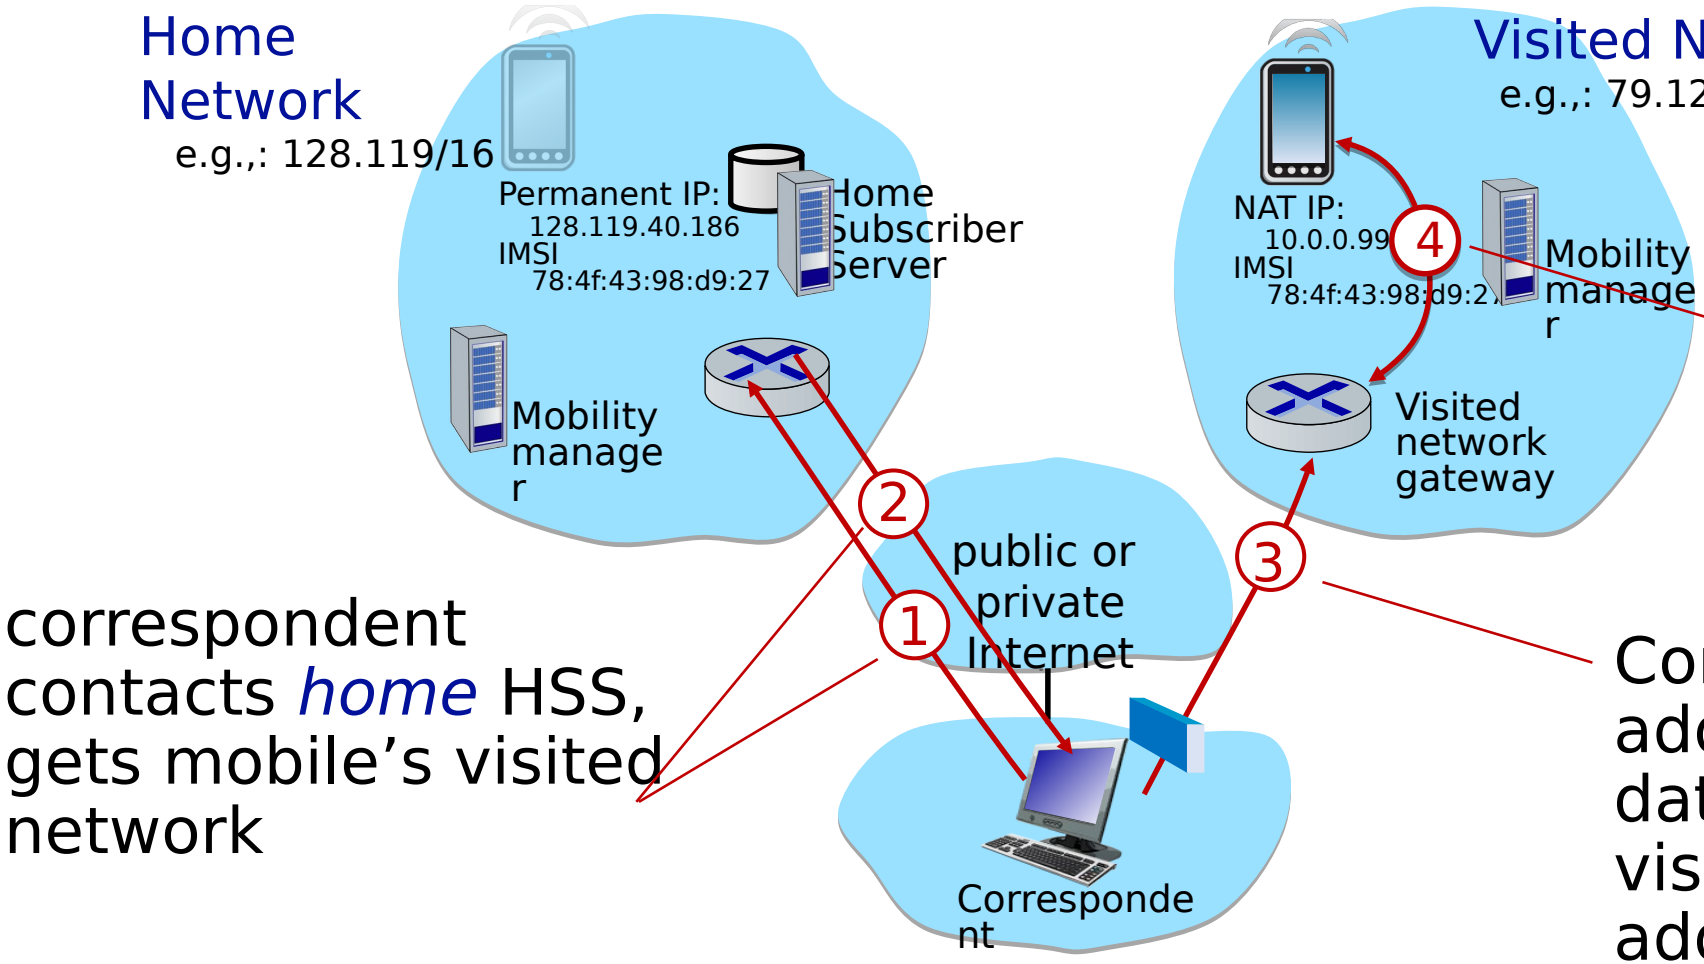

correspondent contacts *home* HSS, gets mobile's visited network

visited gateway router forwards to mobile

Correspondent addresses datagram to visited network address

Mobility with direct routing: comments

- overcomes triangle routing inefficiencies
- *non-transparent to correspondent:* correspondent must get care-of-address from home agent
- what if mobile changes visited network?
  - can be handled, but with additional complexity

Chapter 7 outline

- Introduction

Wireless

- Wireless links and network characteristics
- WiFi: 802.11 wireless LANs
- Cellular networks: 4G and 5G

Mobility

- Mobility management: principles
- Mobility management: practice
  - 4G/5G networks
  - Mobile IP
- Mobility: impact on higher-layer protocols

Mobility in 4G networks: major mobility tasks

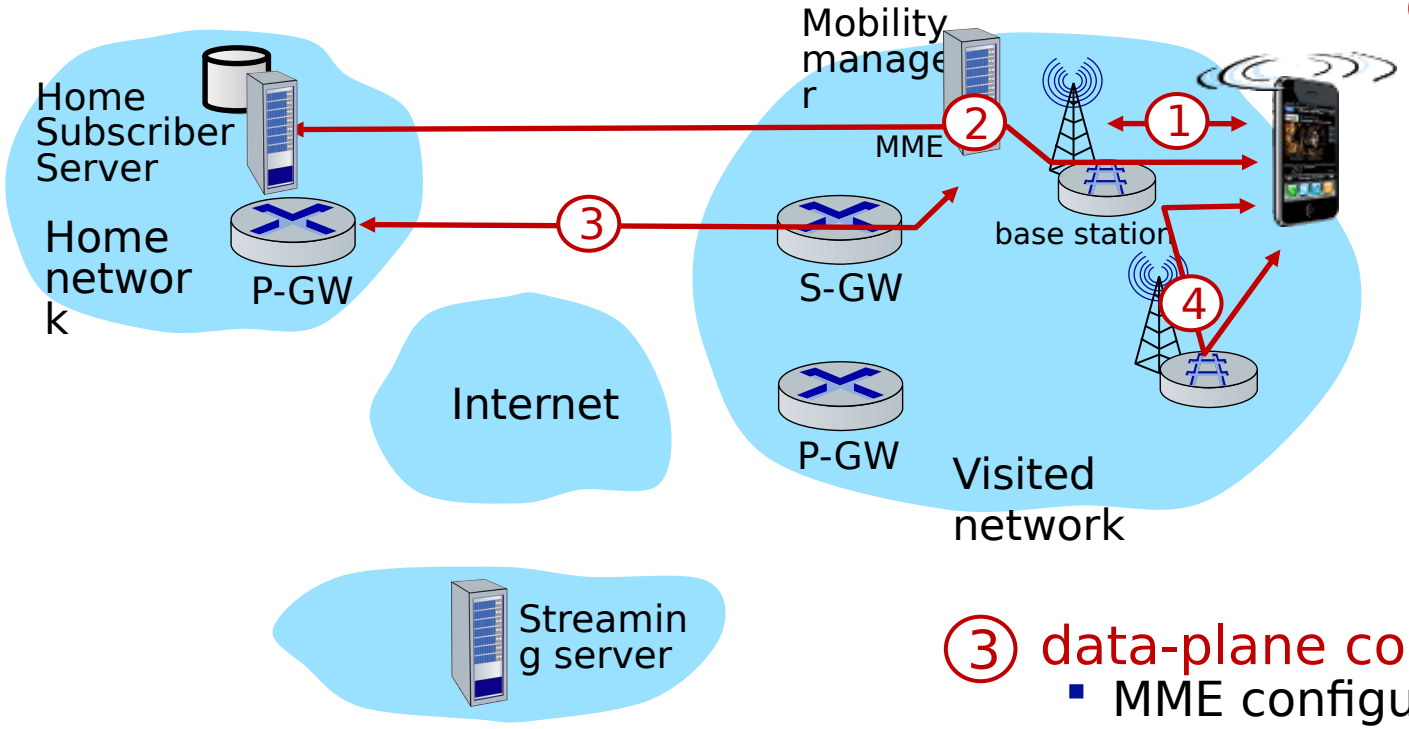

① base station association:
- covered earlier
- mobile provides IMSI – identifying itself, home network

② control-plane configuration:
- MME, home HSS establish control-plane state - mobile is in visited network

③ data-plane configuration:
- MME configures forwarding tunnels for mobile
- visited, home network establish tunnels from home P-GW to mobile

④ mobile handover:
- mobile device changes its point of attachment to visited network

Configuring LTE control-plane elements

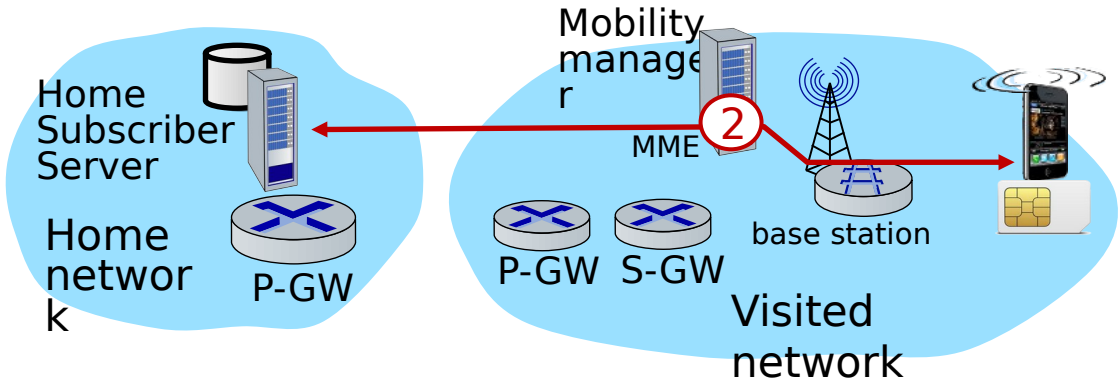

- Mobile communicates with local MME via BS control-plane channel
- MME uses mobile's IMSI info to contact mobile's home HSS
  - retrieve authentication, encryption, network service information
  - home HHS knows mobile now resident in visited network
- BS, mobile select parameters for BS-mobile data-plane radio channel

Configuring data-plane tunnels for mobile

- S-GW to BS tunnel: when mobile changes base stations, simply change endpoint IP address of tunnel
- S-GW to home P-GW tunnel: implementation of indirect routing

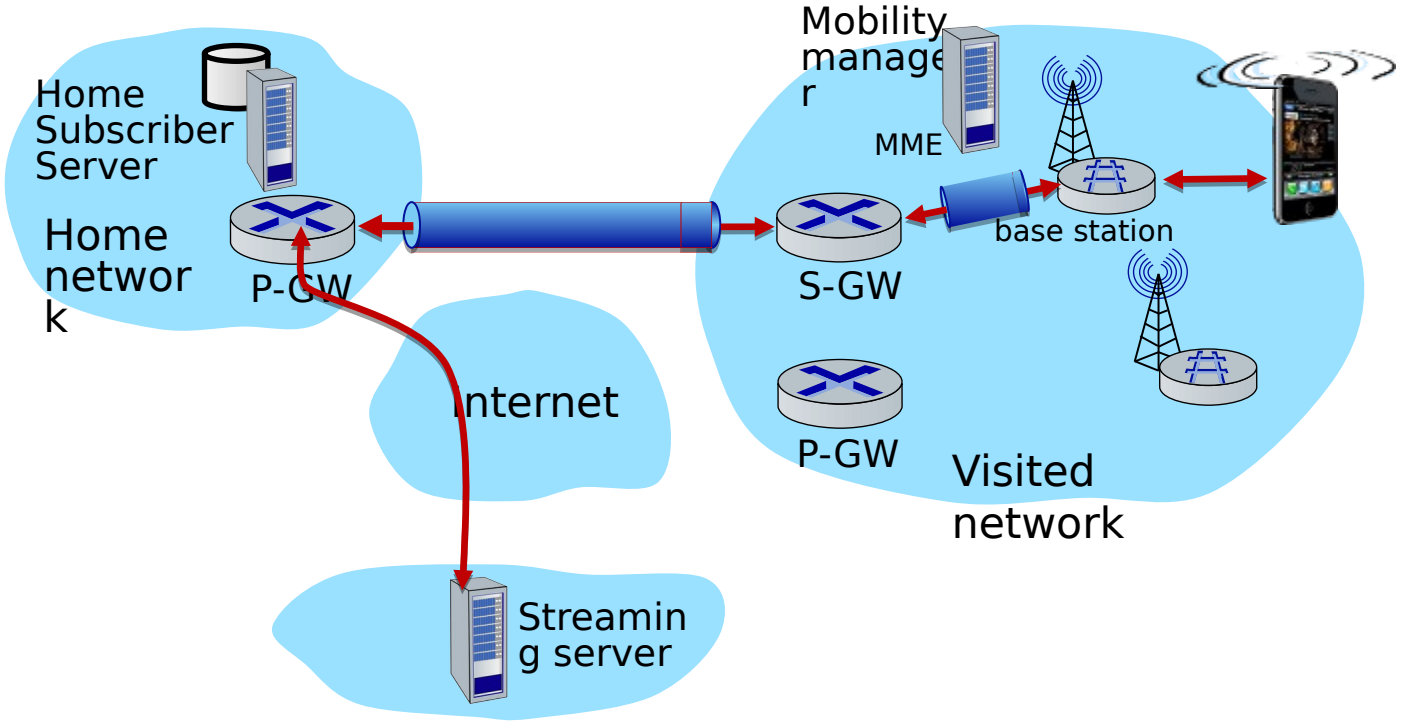

- tunneling via GTP (GPRS tunneling protocol): mobile's datagram to streaming server encapsulated using GTP inside UDP, inside datagram

Handover between BSs in same cellular network

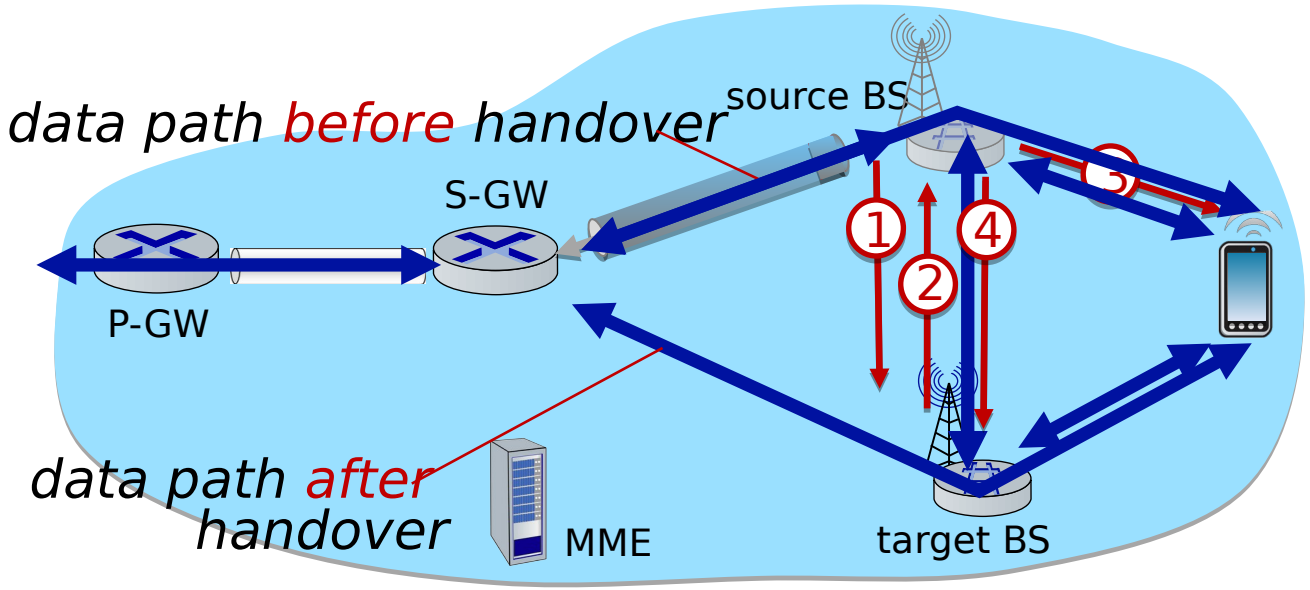

1. current (source) BS selects target BS, sends *Handover Request message* to target BS
2. target BS pre-allocates radio time slots, responds with HR ACK with info for mobile
3. source BS informs mobile of new BS
   - mobile can now send via new BS - handover *looks* complete to mobile
4. source BS stops sending datagrams to mobile, instead forwards to new BS (who forwards to mobile over radio channel)

Handover between BSs in same cellular network

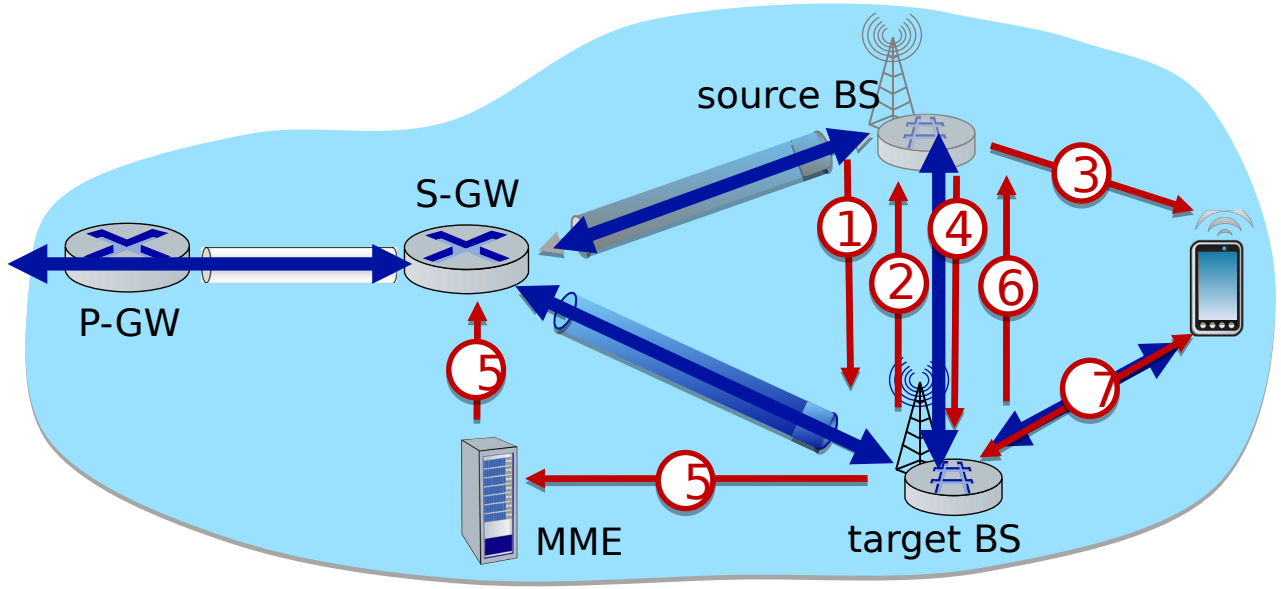

5 target BS informs MME that it is new BS for mobile
- MME instructs S-GW to change tunnel endpoint to be (new) target BS

6 target BS ACKs back to source BS: handover complete, source BS can release resources

7 mobile's datagrams now flow through new tunnel from target BS to S-GW

Mobile IP

- mobile IP architecture standardized ~20 years ago [RFC 5944]
  - long before ubiquitous smartphones, 4G support for Internet protocols
  - did not see wide deployment/use
  - perhaps WiFi for Internet, and 2G/3G phones for voice were “good enough” at the time
- mobile IP architecture:
  - indirect routing to node (via home network) using tunnels
  - mobile IP home agent: combined roles of 4G HSS and home P-GW
  - mobile IP foreign agent: combined roles of 4G MME and S-GW
  - protocols for agent discovery in visited network, registration of visited location in home network via ICMP extensions

Wireless, mobility: impact on higher layer protocols

- logically, impact *should* be minimal …
  - best effort service model remains unchanged
  - TCP and UDP can (and do) run over wireless, mobile
- … but performance-wise:
  - packet loss/delay due to bit-errors (discarded packets, delays for link-layer retransmissions), and handover loss
  - TCP interprets loss as congestion, will decrease congestion window un-necessarily
  - delay impairments for real-time traffic
  - bandwidth a scare resource for wireless links

Chapter 7 summary

Wireless

- Wireless Links and network characteristics
- WiFi: 802.11 wireless LANs
- Cellular networks: 4G and 5G

Mobility

- Mobility management: principles
- Mobility management: practice
  - 4G/5G networks
  - Mobile IP
- Mobility: impact on higher-layer protocols