

I2C1 Mode and Configuration

Mode

I2C

I2C



Configuration

Reset Configuration

✓ NVIC Settings

✓ DMA Settings

✓ GPIO Settings

✓ Parameter Settings

✓ User Constants

Configure the below parameters :

Search (Ctrl+F)




Master Features

I2C Speed Mode	Standard Mode
I2C Clock Speed (Hz)	100000

Slave Features

Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled

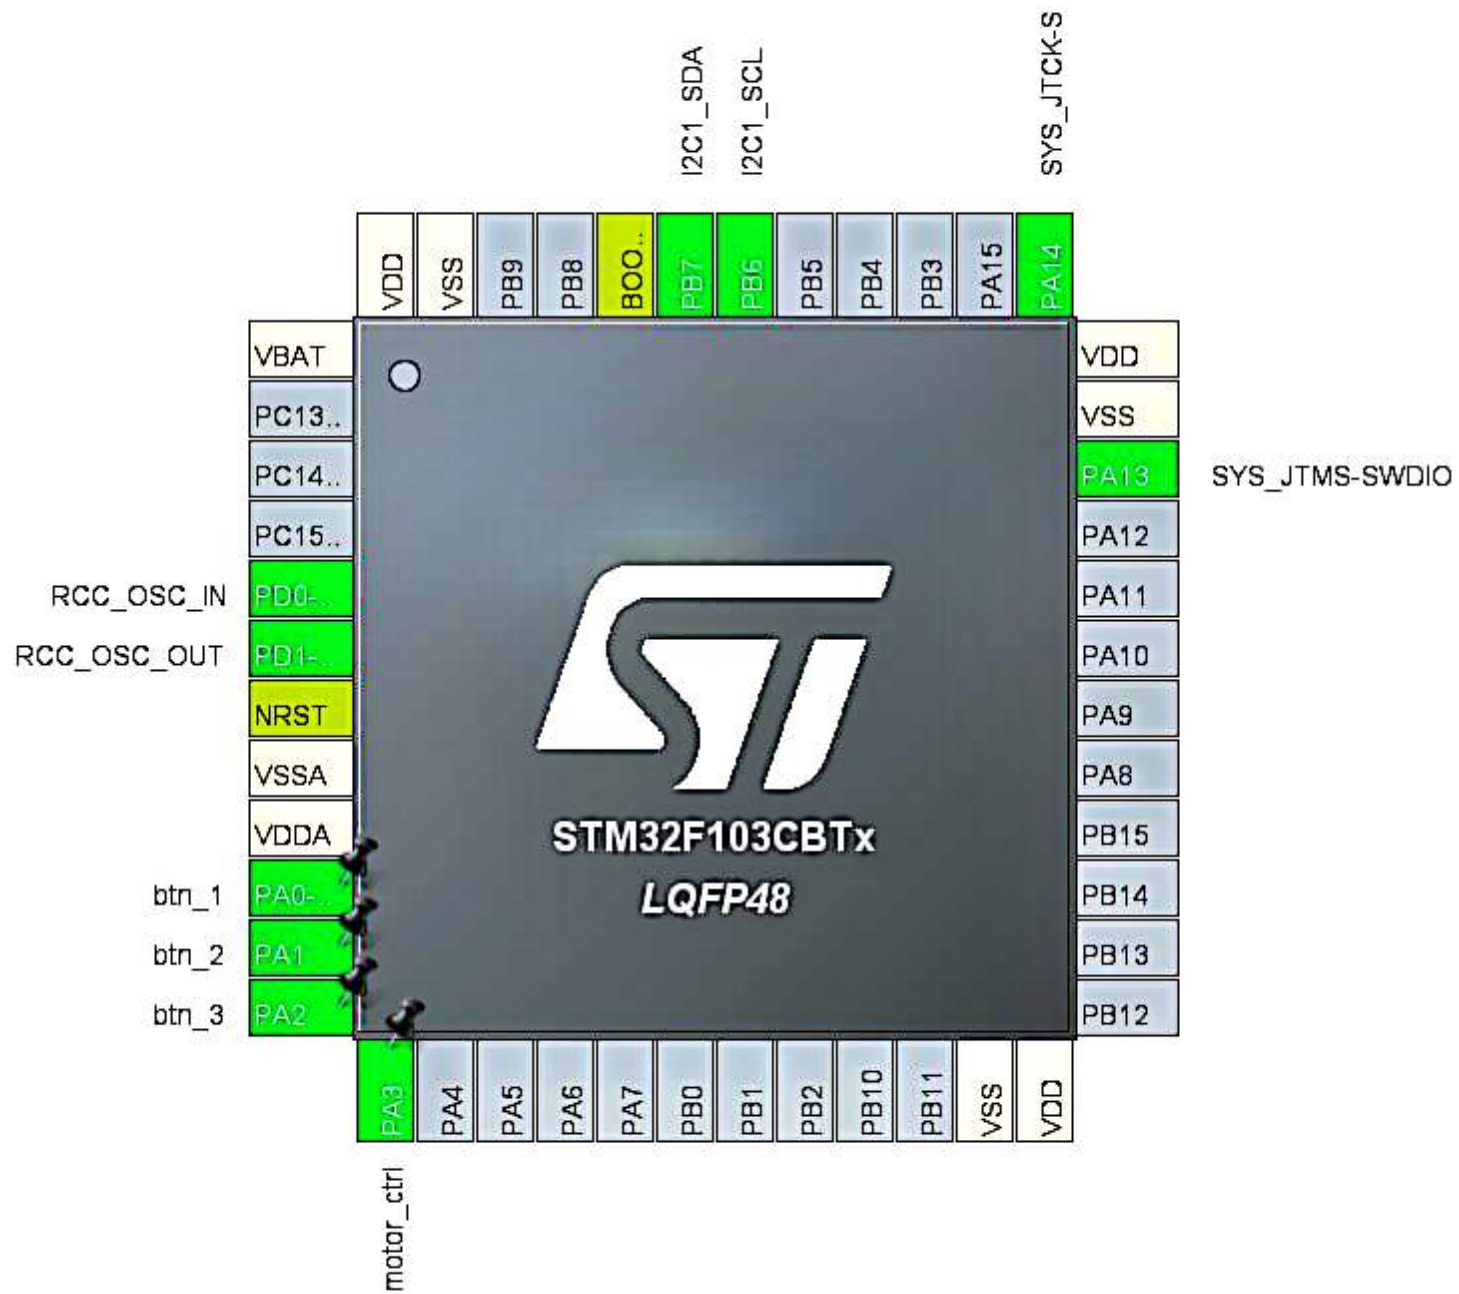

TIM3 Mode and Configuration

Mode

Slave Mode Disable 

Trigger Source Disable 

☒ Internal Clock

Channel1 Disable 

Channel2 Disable 

Channel3 Disable 

Channel4 Disable 

Combined Channels Disable 

☐ XOR activation

☐ One Pulse Mode

Configuration

Reset Configuration

 Parameter Settings

 User Constants

 NVIC Settings

 DMA Settings

Configure the below parameters :





Counter Settings

Prescaler (PSC - 16 bits value) 7199

Counter Mode Up

Counter Period (AutoReload Register - 4999

Internal Clock Division (CKD) No Division

auto-reload preload Disable

Trigger Output (TRGO) Parameters

Master/Slave Mode (MMS) Disable (Trigger output is not delayed)

