AprilTags for the Duckiedrone DD24-B

Family tag36h11, IDs 0 to 11. Side of the black square: 250 mm.

How to print
1. Print at 100 % (no "fit to page").
2. Measure the check line on each page: it must be 100 mm.
   If not, measure the black square and write down the real side;
   that value goes in the detector config (tag size).
3. Use matte paper if possible. Lamp glare on glossy paper
   makes the detector lose the tag.

How to lay them out
- Flat, no wrinkles, tape only on the white margins.
- All with the "front" arrow pointing the same way:
  the direction the drone faces at takeoff.
- Spacing between centers: 40 cm, on the grid in the drawing.
- The drone takes off over the X, camera facing IDs 0-2.
- Measure and write down each tag's real position from the X.

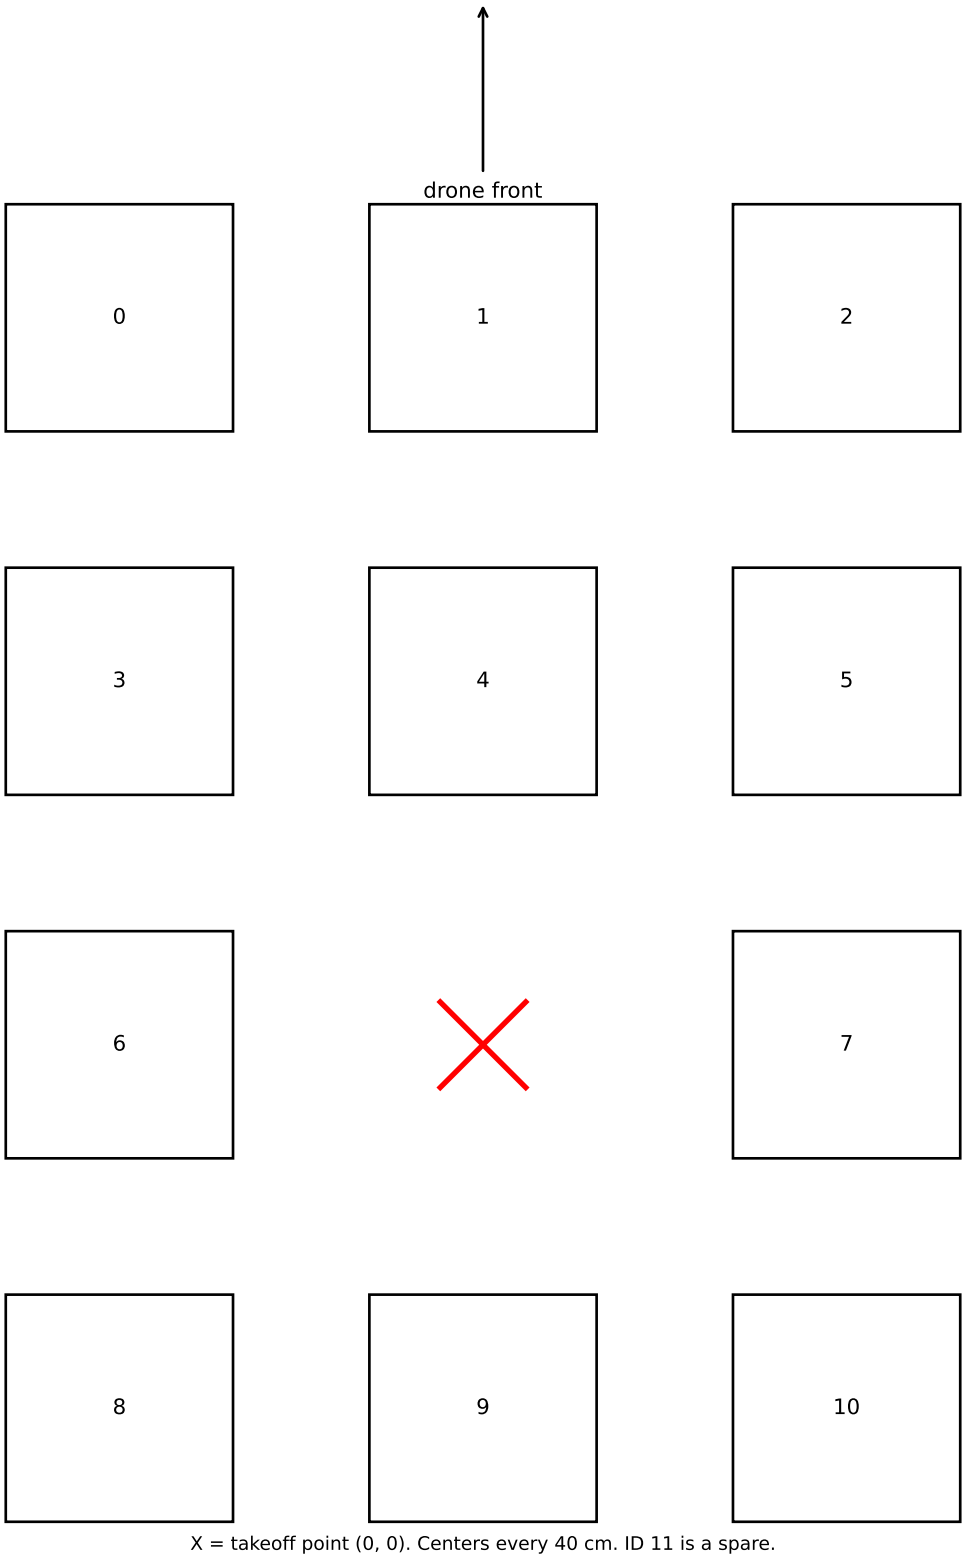

X = takeoff point (0, 0). Centers every 40 cm. ID 11 is a spare.

front



tag36h11 ID 0   black side 250 mm

check line: 100 mm

front



tag36h11 ID 1   black side 250 mm

check line: 100 mm

front



tag36h11 ID 2   black side 250 mm

check line: 100 mm

front



tag36h11 ID 3   black side 250 mm

check line: 100 mm

front



tag36h11 ID 4   black side 250 mm

check line: 100 mm

front



tag36h11 ID 5   black side 250 mm

check line: 100 mm

front



tag36h11 ID 6   black side 250 mm

check line: 100 mm

front



tag36h11 ID 7   black side 250 mm

check line: 100 mm

front



tag36h11 ID 8   black side 250 mm

check line: 100 mm

front

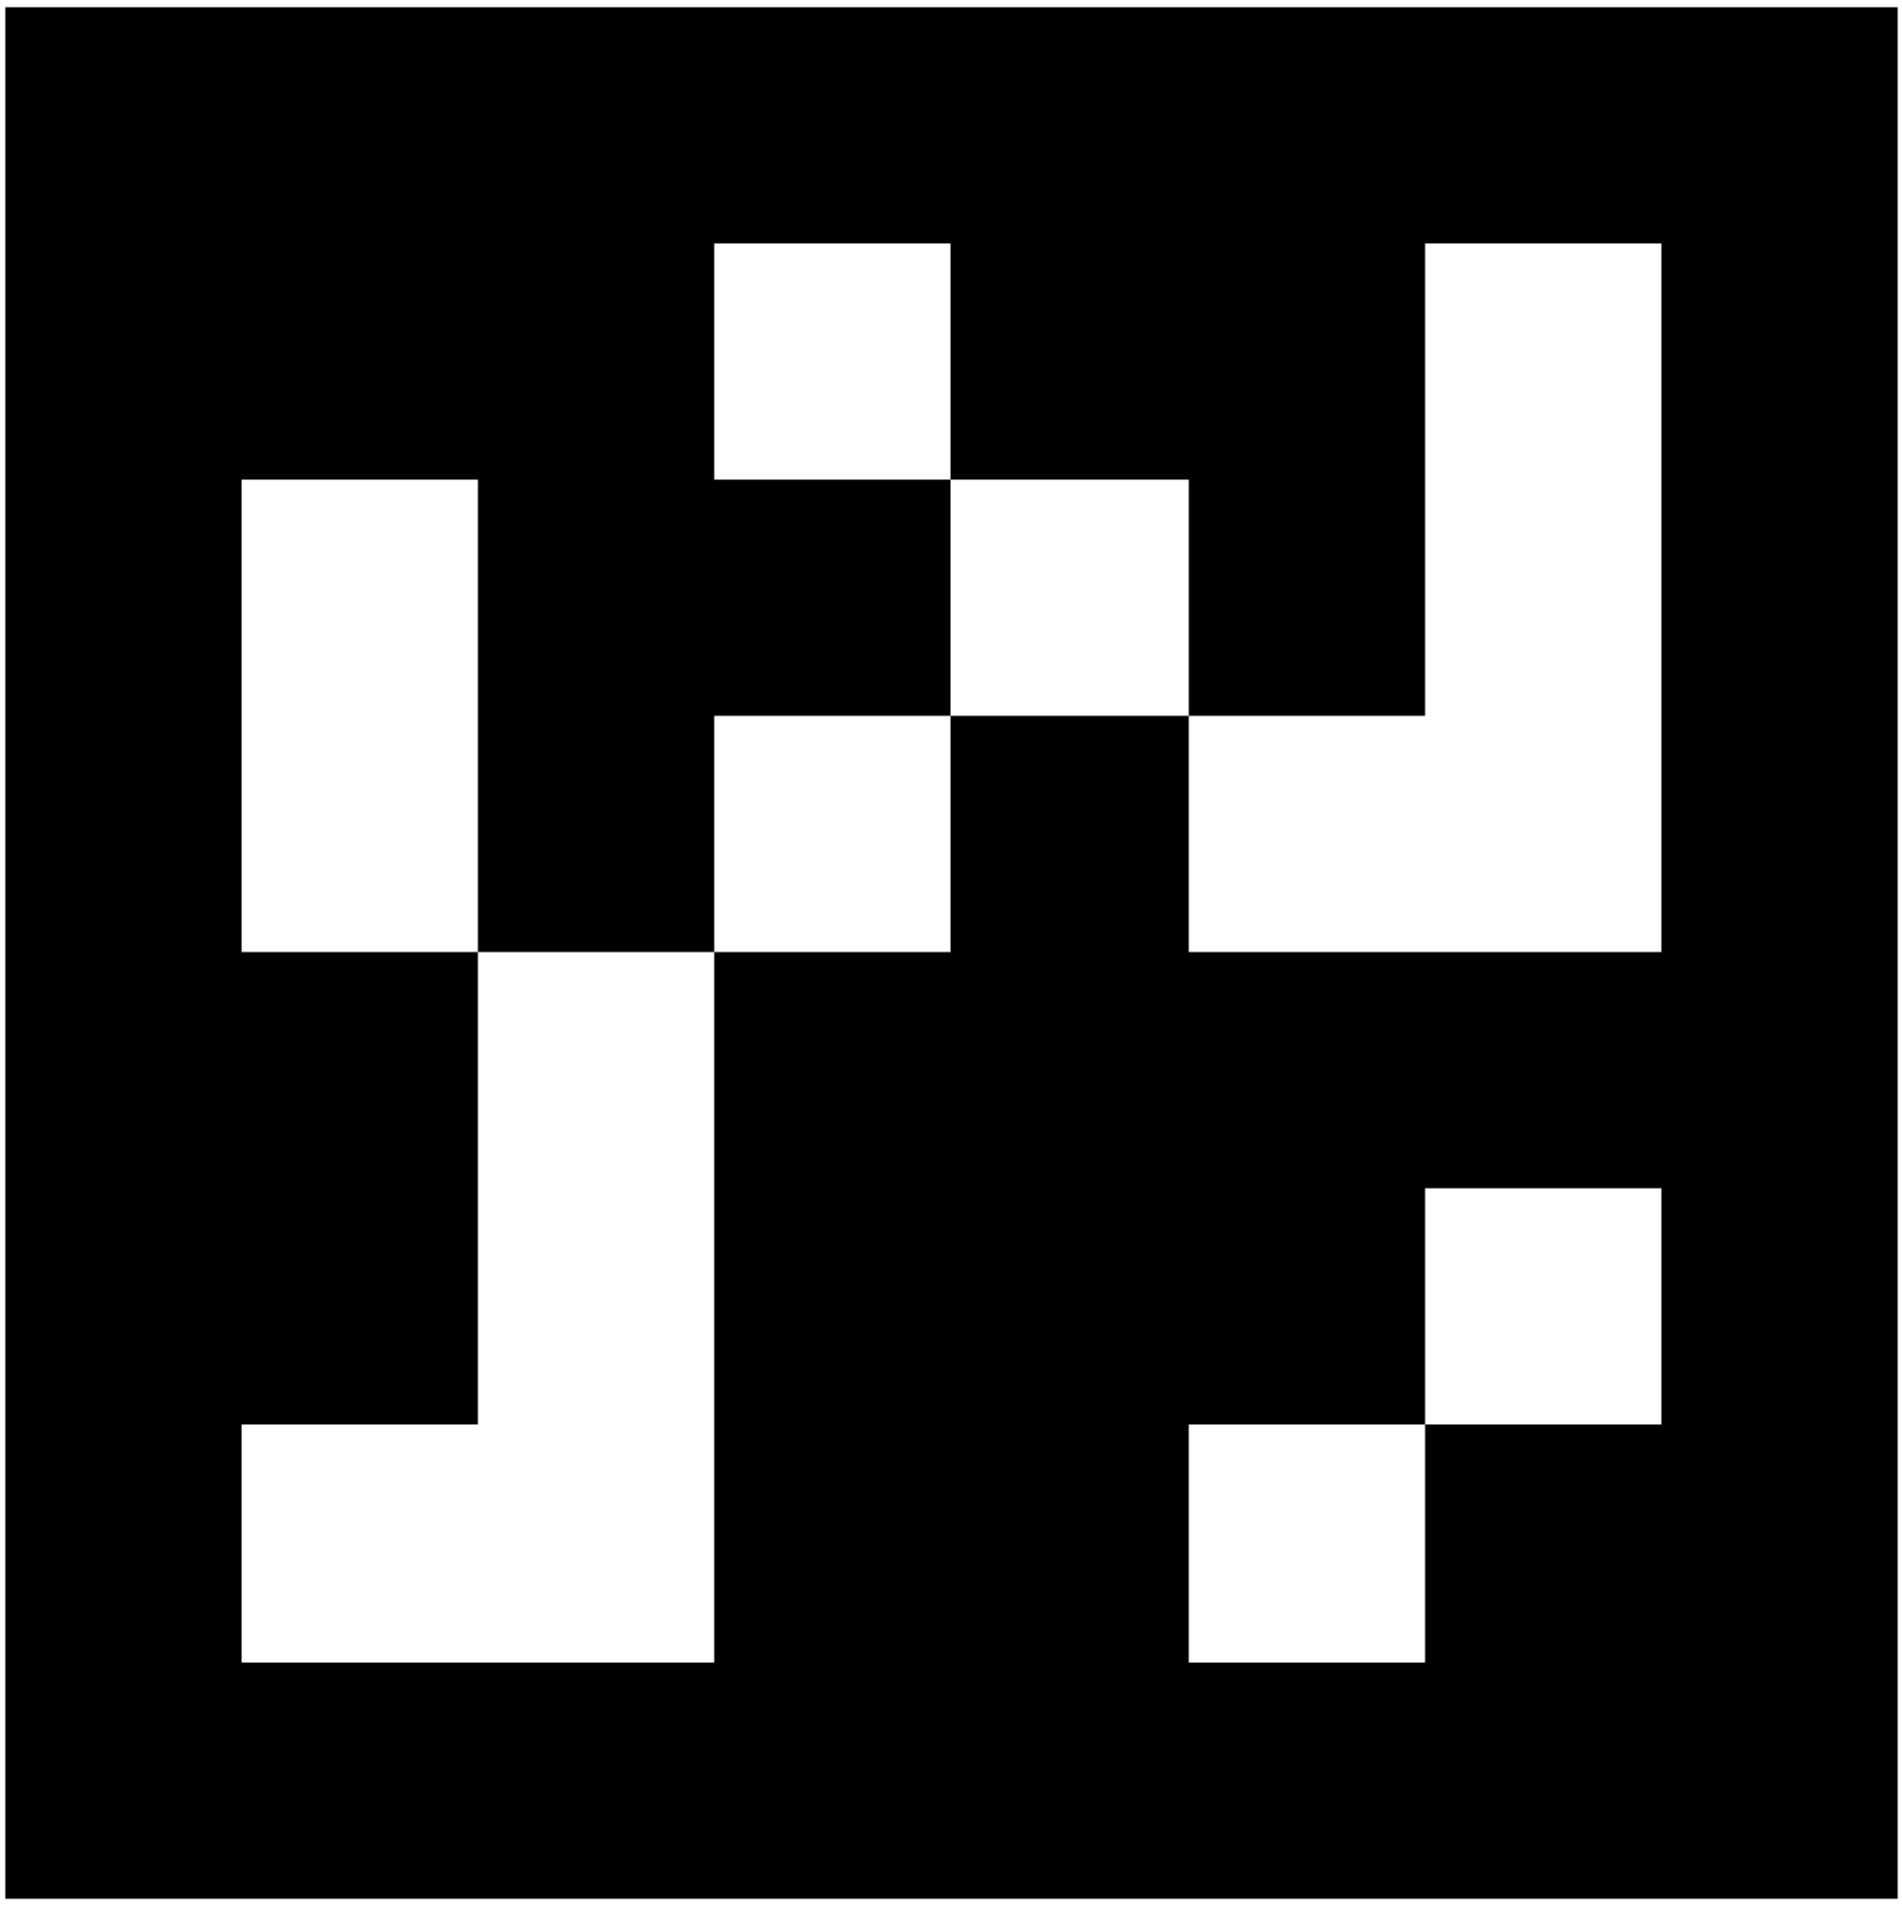

tag36h11 ID 9   black side 250 mm

check line: 100 mm

front



tag36h11 ID 10   black side 250 mm

check line: 100 mm

front

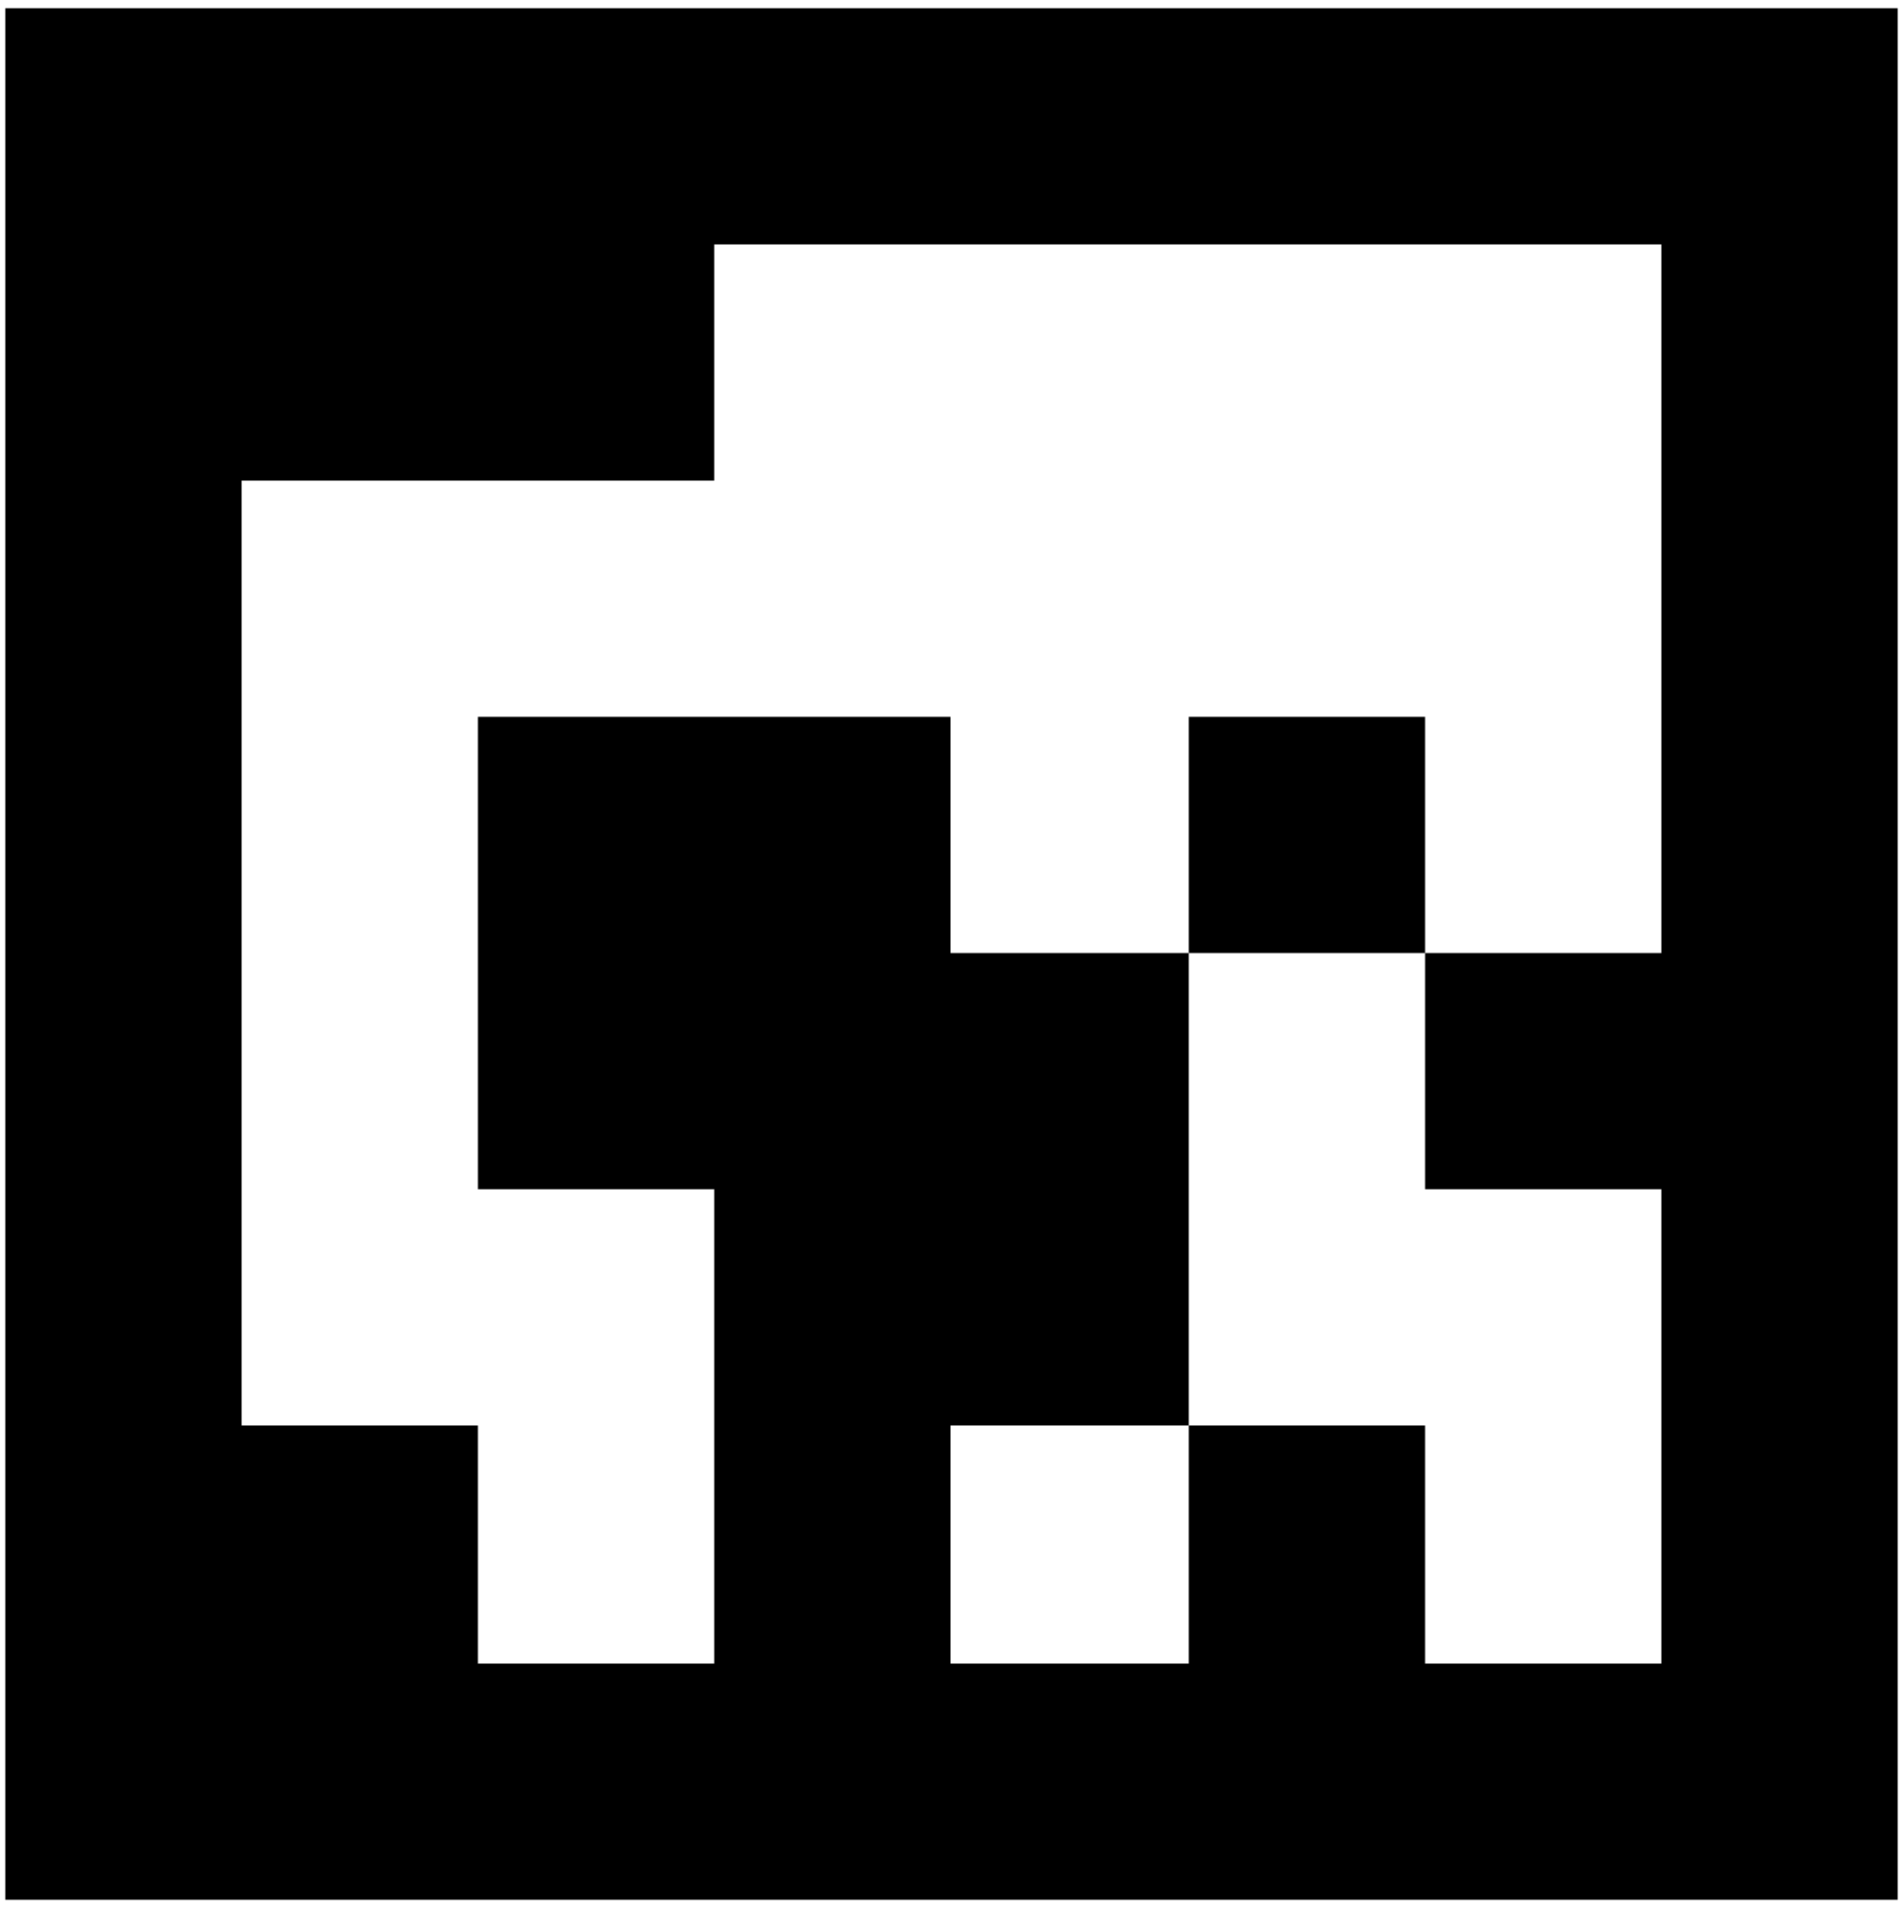

tag36h11 ID 11   black side 250 mm

check line: 100 mm