OETCS/WP1/D02

ITEA2 Project
Call 6 11025
2012 – 2015

Work-Package 4: “V&V”

ETCS Specification Findings

Findings of ETCS specification analyses

Stefan Rieger

September 2013

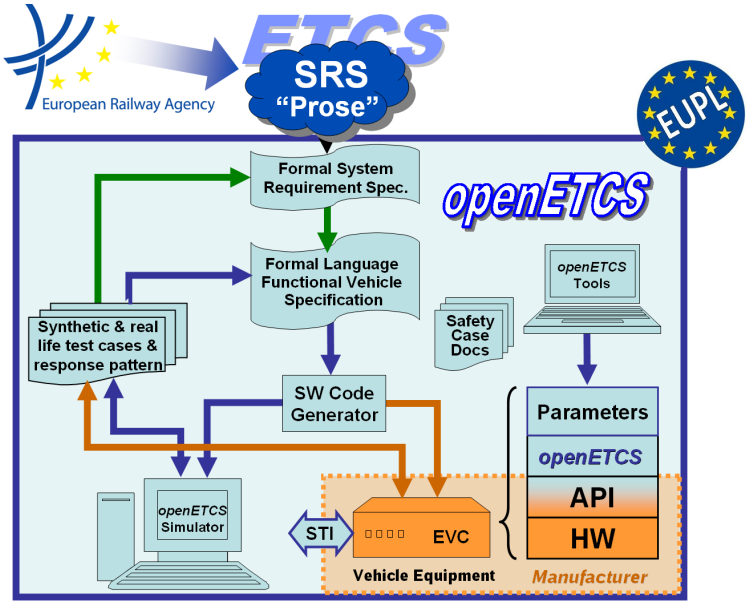

Funded by:

Federal Ministry of Education and Research
Région de Bruxelles-Capitale
GOBIERNO DE ESPAÑA
MINISTERIO DE INDUSTRIA, ENERGÍA Y TURISMO

openETCS

This page is intentionally left blank

Work-Package 4: “V&V”

OETCS/WP1/D02
September 2013

ETCS Specification Findings

Findings of ETCS specification analyses

Stefan Rieger

TWT GmbH Science & Innovation
Bernhäuser Straße 40-42
73765 Neuhausen
Germany

Description of work

Prepared for openETCS@ITEA2 Project

Abstract: This document lists analysis results of the ETCS specification and accompagnying standards that indicate problems such as unclearities, inconsistencies, ambiguities, incompleteness or errors. For now it is part of TWT's model verification user story but the goal is to extend its scope.

Table of Contents

1 Purpose of this Document

This document lists findings in the ETCS specification and accompagnying standards indicating problems such as inconsistencies, ambiguities, incompleteness or errors that arise during analysis or modelling. The goals are the following:

- Clarify and correct problems to help in system modelling
- Indicate issues in the standard for future improvement
- ...

This document is to be considered as “living document” that is continuously extended during the runtime of the project. Solutions to issues or workarounds shall be added when available.

2 List of Issues

2.1 Subset 026 3.6 Location Principles, Train Position and Train Orientation

Issue #1 (3.6.1.3 Train Position): What is the difference between the *estimated train front end position* and the *train confidence interval*? Both values are contained in the *train position information*. It seems that the *train confidence interval* is a more conservative approximation. If this is the case, how exactly is the *estimated train front end position* defined?

Resolution: Write resolution here...

2.2 Subset 026 5.4 Procedure Start of Mission

Issue #2 (5.4.2.2 Train Data): It is not clear what the train data consists of.

Issue #3 (5.4.3.2 State S1 - Driver-ID Validation): The specification states that the driver revalidates the Driver-ID. So it can be assumed that the system relies on correct validation by the driver. Is this true? When does the Driver-ID become invalid or unknown? At End of Mission? The same holds for the *train running number*.

Issue #4 (5.4.3.2 State S1 - Virtual Balise Cover): Virtual balise cover is not properly specified. The same holds for the process of setting/removing virtual balise cover. For now this feature is omitted in the models.

Issue #5 (5.4.3.2 State S2 - Enter/Re-validate Level): The specification distinguishes the following three cases

1. Entering level (if state *unknown*)
2. Re-validate level (if state *invalid*)
3. Re-enter level (if state *invalid*)

The purpose of this distinction is not clear as entering the level suffices (the current setting is invalid or unknown and thus irrelevant).

References