

Reliability
Value-added
Convenience



LONGi®
Expert In Magnetic Technology

LONGi®
Expert In Magnetic Technology

LONGi MAGNET CO.,LTD.

Add : #6, Wenhua Road, Fushun Economic Development Area, China 113122

Phone: +86-24-56700058 56700068 Fax: +86-24-56700017

Email: info@ljmagnet.com

LONGi MAGNET AUSTRALIA PTY LTD

Add: Unit 4, 44 Vinnicombe Drive, Canning Vale, WA, 6155

Phone: (08) 6253 8830

Email: support@ljmagnet.com.au

LJK Series Multi-pole Tramp Magnet

LONGi MAGNET CO.,LTD.
LONGi MAGNET AUSTRALIA PTY LTD



LJK Electromagnetic Separator

Application



LJK Series Magnetic Separator uses a unique magnetic field arrangement to separate magnetic materials and tramp iron with little or no removal of magnetic ore to protect downstream crushing equipment.

Feature

- Fully automated operation requires no human intervention.
- The separator activates automatically upon receiving a signal from the upstream metal detector.
- Unique system design effectively differentiates tramp iron from magnetic ore, capturing the damaging metal while returning the valuable ore to the processing stream.
- Real-time monitoring via the metal detector ensures continuous, reliable, and precise removal of tramp iron from the conveyor.
- Installed parallel to the belt conveyor, the system offers a space-saving footprint with easy installation and maintenance.
- The system includes: LJK Electromagnetic Separator, GLA-LK Control Panel, LJT Metal Detector, Non-magnetic Platform (optional), and Non-magnetic Idler (optional).



LJT Metal Detector

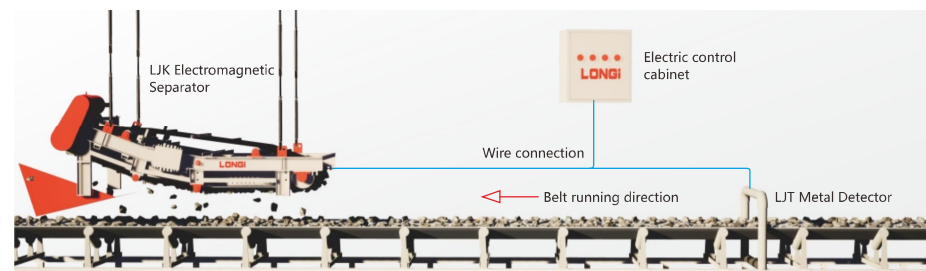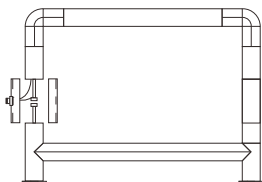

Technical Parameters

Model	Cooling Type	Applicable Belt Width (mm)	Suspension Height (mm)	Average Power (kw)	Main Excitation Power (kw)	Auxiliary Excitation Power (kw)	Discharge Belt (mm)	Drive Power (kw)	Control Panel	Weight (kg)
LJK-3506	Air Cooled	650	<350	≤2.5	8	13	500	4.0	GLA-LK-3506	1470
LJK-4008	Air Cooled	800	<400	≤3.6	13	17	650	5.5	GLA-LK-4008	2200
LJK-4510	Air Cooled	1000	<450	≤4.3	19	17	800	7.5	GLA-LK-4510	3200
LJK-5012	Air Cooled	1200	<500	≤6	23	26	1000	11	GLA-LK-5012	4400
LJK-5514	Air Cooled	1400	<550	≤8.1	30	36	1200	15	GLA-LK-5514	5900
LJK-6016	Air Cooled	1600	<600	≤8.6	32	36	1400	18.5	GLA-LK-6016	7200
LJK-6518	Air Cooled	1800	<600	≤9.8	40	40	1600	18.5	GLA-LK-6518	10000
LJK-7020	Air Cooled	2000	<600	≤11.2	50	40	1800	22	GLA-LK-7020	13500
LJK-7522	Air Cooled	2200	<650	≤12.6	60	44	2000	22	GLA-LK-7522	16800

We reserve the right to change the above specifications without prior notice.