


Configurable I2C address jumper.  
Solder between SEL (J2-2) and (J2-1)  
or Solder between SEL (J2-2) and (J2-3)

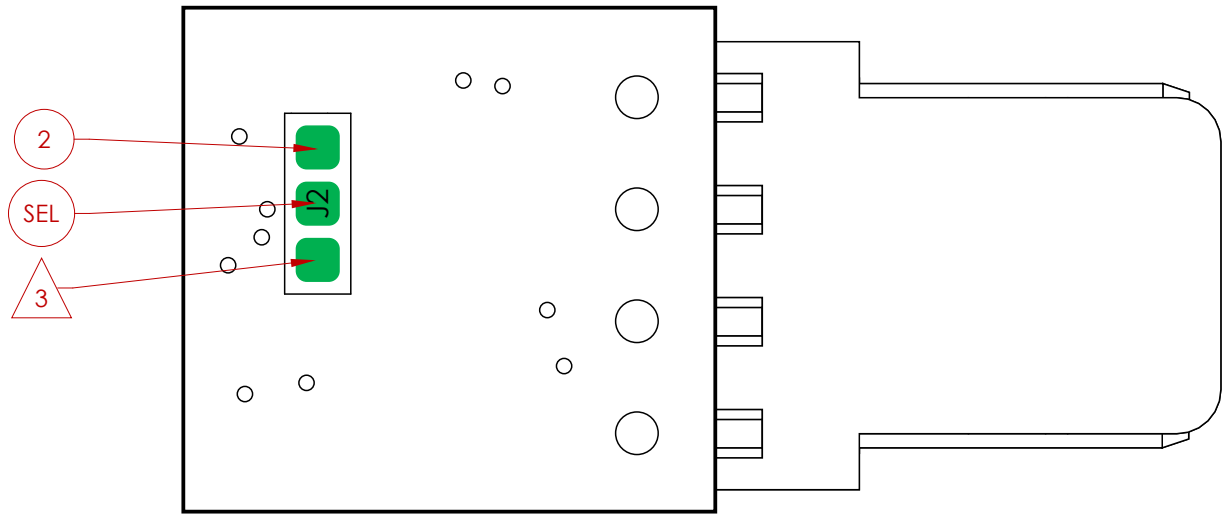

- Note:
- 1 PIN 1 LOCATION
  - 2 SOLDER SEL AND ITEM 2 FOR 3 OF 5 PCBA'S
  - 3 SOLDER SEL AND ITEM 3 FOR 2 OF 5 PCBA'S
  - 4. New Element

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF . ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF IS PROHIBITED.			UNLESS OTHERWISE SPECIFIED:		NAME	DATE			
			DIMENSIONS ARE IN INCHES	DRAWN		2/12/2017	TITLE		
			TOLERANCES:	CHECKED					
			FRACTIONAL ±	ENG APPR.					
			ANGULAR: MACH ± BEND ±	MFG APPR.					
			TWO PLACE DECIMAL ±	Q.A.			COMMENTS:		
			THREE PLACE DECIMAL ±						
			INTERPRET GEOMETRIC TOLERANCING PER:				SIZE	DWG. NO.	
			MATERIAL						
			FINISH						
NEXT ASSY	USED ON	FINISH				SCALE: 1:1	WEIGHT:	SHEET 1 OF 1	
APPLICATION		DO NOT SCALE DRAWING							
PROPRIETARY AND CONFIDENTIAL									