

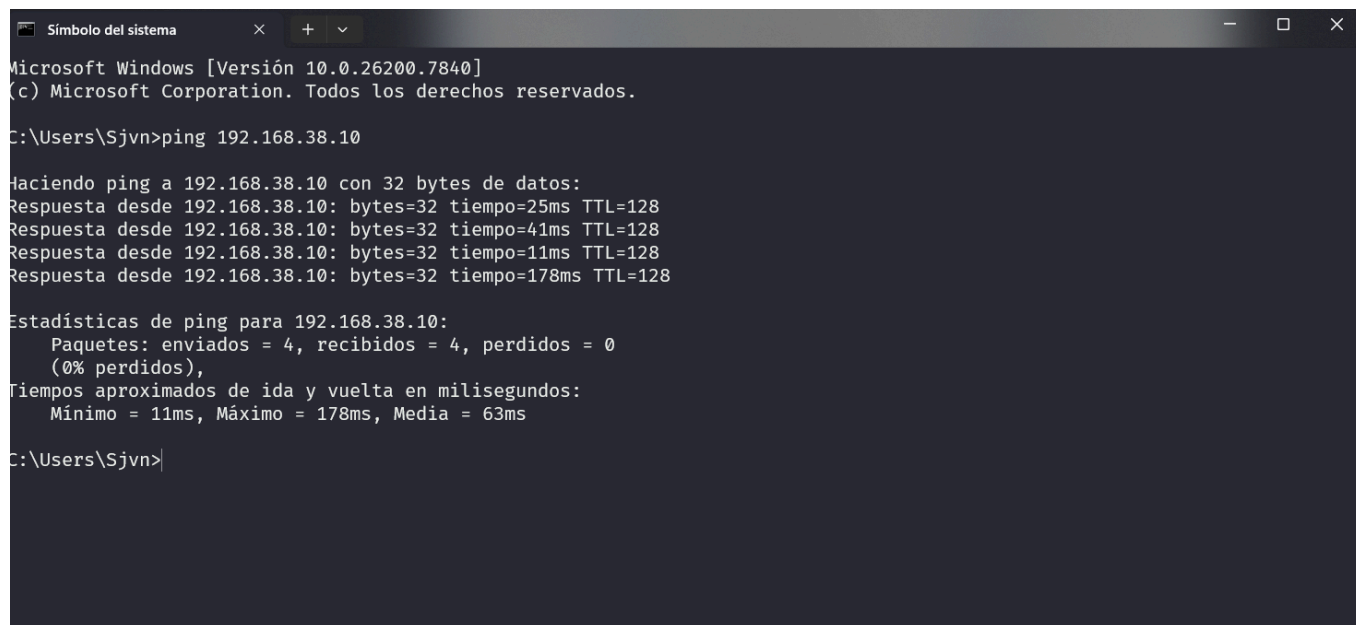
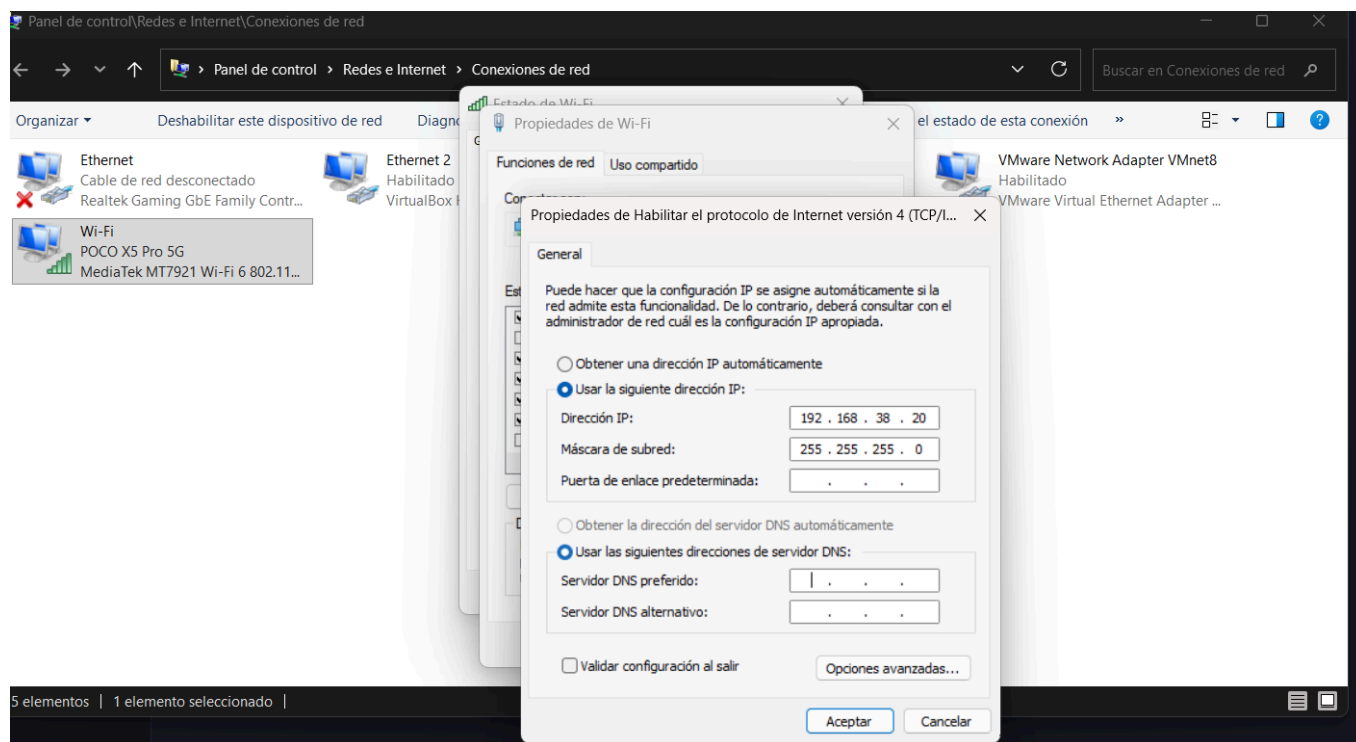


Laboratorio 2

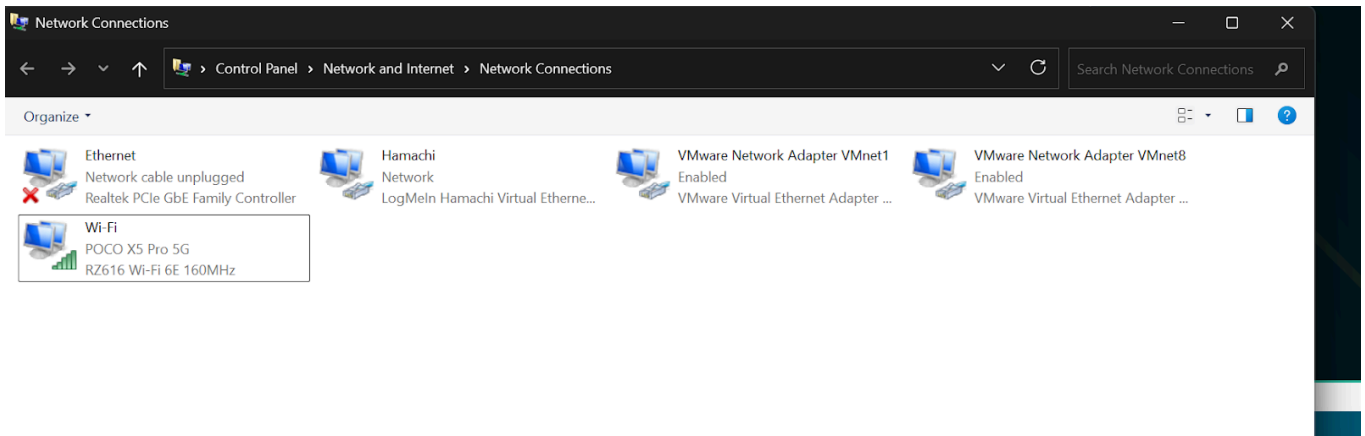

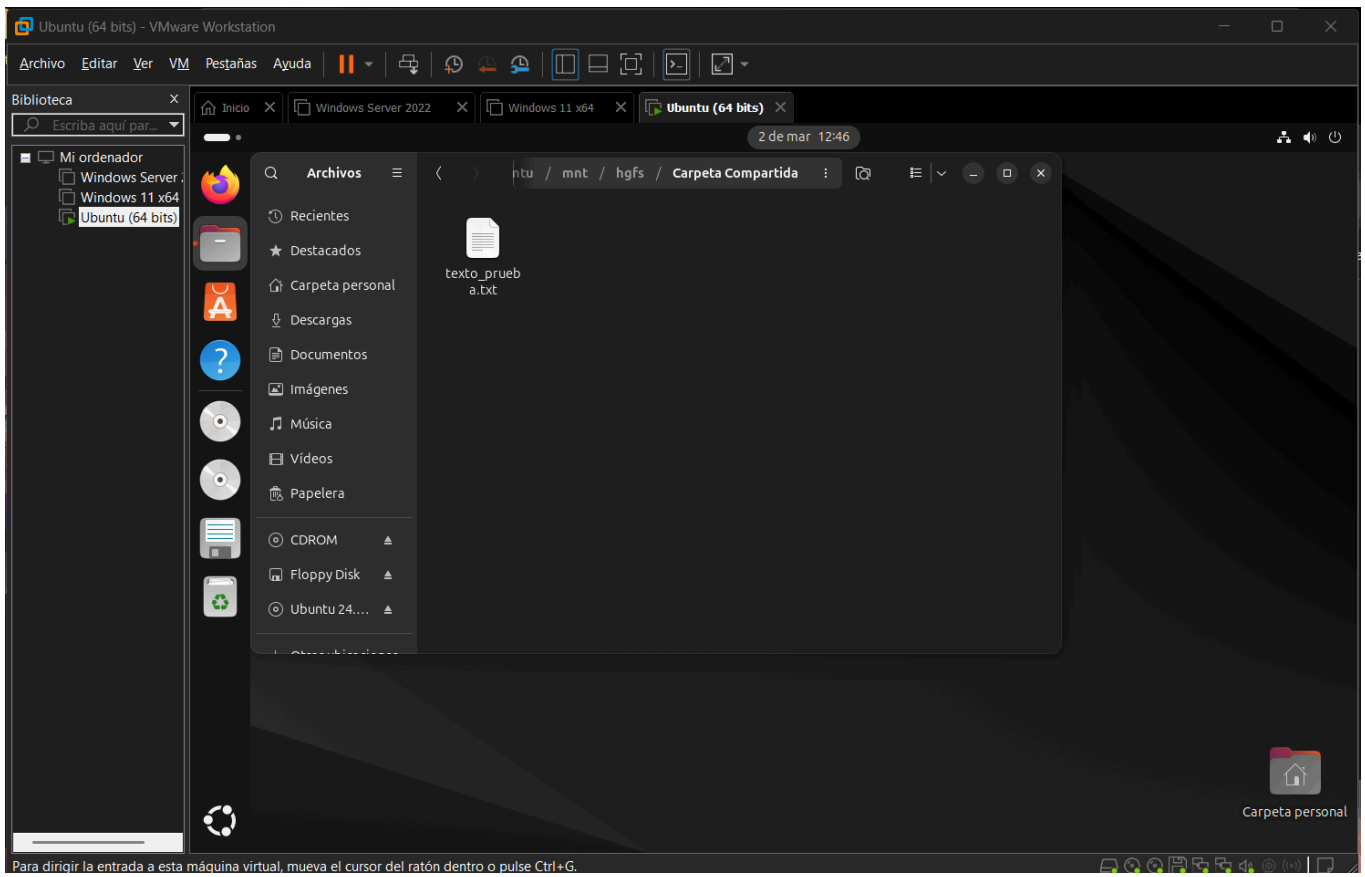

Wi-Fi Properties

Networking Sharing

Internet Protocol Version 4 (TCP/IPv4) Properties

General

You can get IP settings assigned automatically if your network supports this capability. Otherwise, you need to ask your network administrator for the appropriate IP settings.

☐ Obtain an IP address automatically

☒ Use the following IP address:

IP address:

192 . 168 . 38 . 50

Subnet mask:

255 . 255 . 255 . 0

Default gateway:

192 . 168 . 38 . 42

☐ Obtain DNS server address automatically

☒ Use the following DNS server addresses:

Preferred DNS server:

. . .

Alternate DNS server:

. . .

☐ Validate settings upon exit

Advanced...

OK

Cancel

```
Command Prompt
Connection-specific DNS Suffix . :
Link-local IPv6 Address . . . . . : fe80::8337:3ce:999b:89f0%10
IPv4 Address. . . . . : 192.168.86.1
Subnet Mask . . . . . : 255.255.255.0
Default Gateway . . . . . :

Wireless LAN adapter Wi-Fi:

Connection-specific DNS Suffix . :
IPv6 Address. . . . . : 2800:98:1b51:39a8:5f9f:4455:4225:782e
Temporary IPv6 Address. . . . . : 2800:98:1b51:39a8:9cc8:445a:2e43:80ff
Link-local IPv6 Address . . . . . : fe80::8cc5:bcf2:467a:8a77%21
IPv4 Address. . . . . : 192.168.38.50
Subnet Mask . . . . . : 255.255.255.0
Default Gateway . . . . . : fe80::c430:40ff:fe3b:74ee%21

C:\Users\danib>ping 192.168.38.70

Pinging 192.168.38.70 with 32 bytes of data:
Reply from 192.168.38.70: bytes=32 time<1ms TTL=64
Reply from 192.168.38.70: bytes=32 time<1ms TTL=64

Ping statistics for 192.168.38.70:
    Packets: Sent = 2, Received = 2, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
Control-C
^C
C:\Users\danib>

ip a
lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
ens33: <NO-CARRIER,BROADCAST,MULTICAST,UP> mtu 1500 qdisc fq_codel state DOWN group default qlen 1000
    link/ether 00:0c:29:35:d9:b6 brd ff:ff:ff:ff:ff:ff
    altname enp2s1
    altname enx000c2935d9b6
    inet 192.168.38.70/24 brd 192.168.38.255 scope global noprefixroute ens33
        valid_lft forever preferred_lft forever
    inet6 fe80::15d9:4560:d480:79b1/64 scope link noprefixroute
        valid_lft forever preferred_lft forever

ping 192.168.38.50
PING 192.168.38.50 (192.168.38.50) 56(84) bytes of data.
4 bytes from 192.168.38.50: icmp_seq=1 ttl=128 time=0.340 ms
4 bytes from 192.168.38.50: icmp_seq=2 ttl=128 time=0.369 ms
C
-- 192.168.38.50 ping statistics --
2 packets transmitted, 2 received, 0% packet loss, time 1005ms
rtt min/avg/max/mdev = 0.340/0.354/0.369/0.014 ms

pc1@pc1-vmwarevirtualplatform:~
```

