


## ESERCIZIO 2 DANIELE MARRA

I client sono comunicanti tra loro.

Il test del ping è stato effettuato tra “pc1” e “pc2”, collegati allo stesso switch, e tra “pc1” e “pc5” collegati a switch diversi.

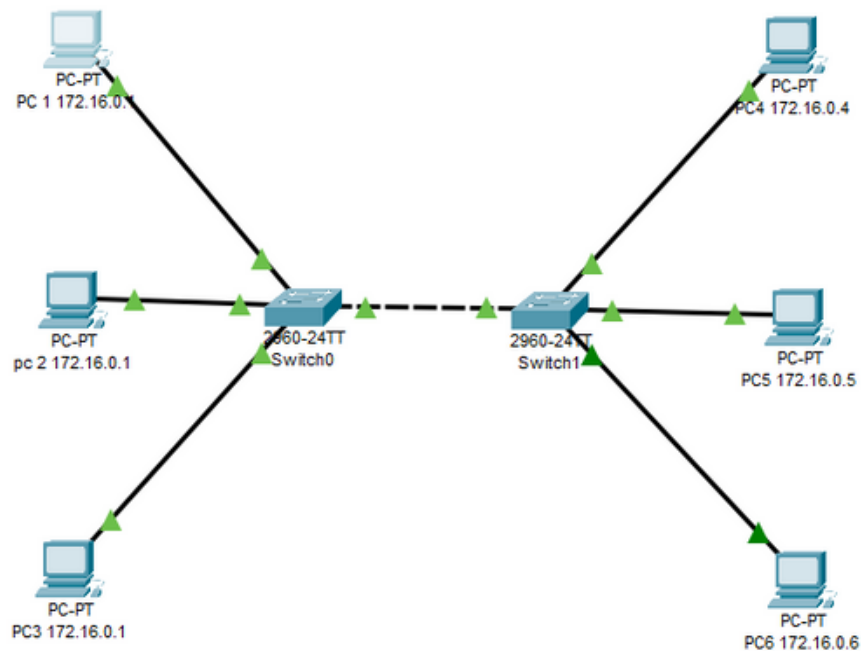

```
PC 1 172.16.0.1
Physical Config Desktop Programming Attributes
Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ping 172.16.0.2

Pinging 172.16.0.2 with 32 bytes of data:

Reply from 172.16.0.2: bytes=32 time<1ms TTL=128
Reply from 172.16.0.2: bytes=32 time<1ms TTL=128
Reply from 172.16.0.2: bytes=32 time<1ms TTL=128
Reply from 172.16.0.2: bytes=32 time<1ms TTL=128

Ping statistics for 172.16.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 172.16.0.5

Pinging 172.16.0.5 with 32 bytes of data:

Reply from 172.16.0.5: bytes=32 time=10ms TTL=128
Reply from 172.16.0.5: bytes=32 time<1ms TTL=128
Reply from 172.16.0.5: bytes=32 time<1ms TTL=128
Reply from 172.16.0.5: bytes=32 time<1ms TTL=128

Ping statistics for 172.16.0.5:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 10ms, Average = 2ms

C:\>
```