Cost-aware local recovery with a paid 4 s handover

100 simulated robots × 60 s · 8 tested confirmation sites · 32 factual runs · original fixed weights

Ordinary legacy scoring, admission and neighbor caches are preserved in both arms. The recovery gate requires 420 available-radio silent slots.

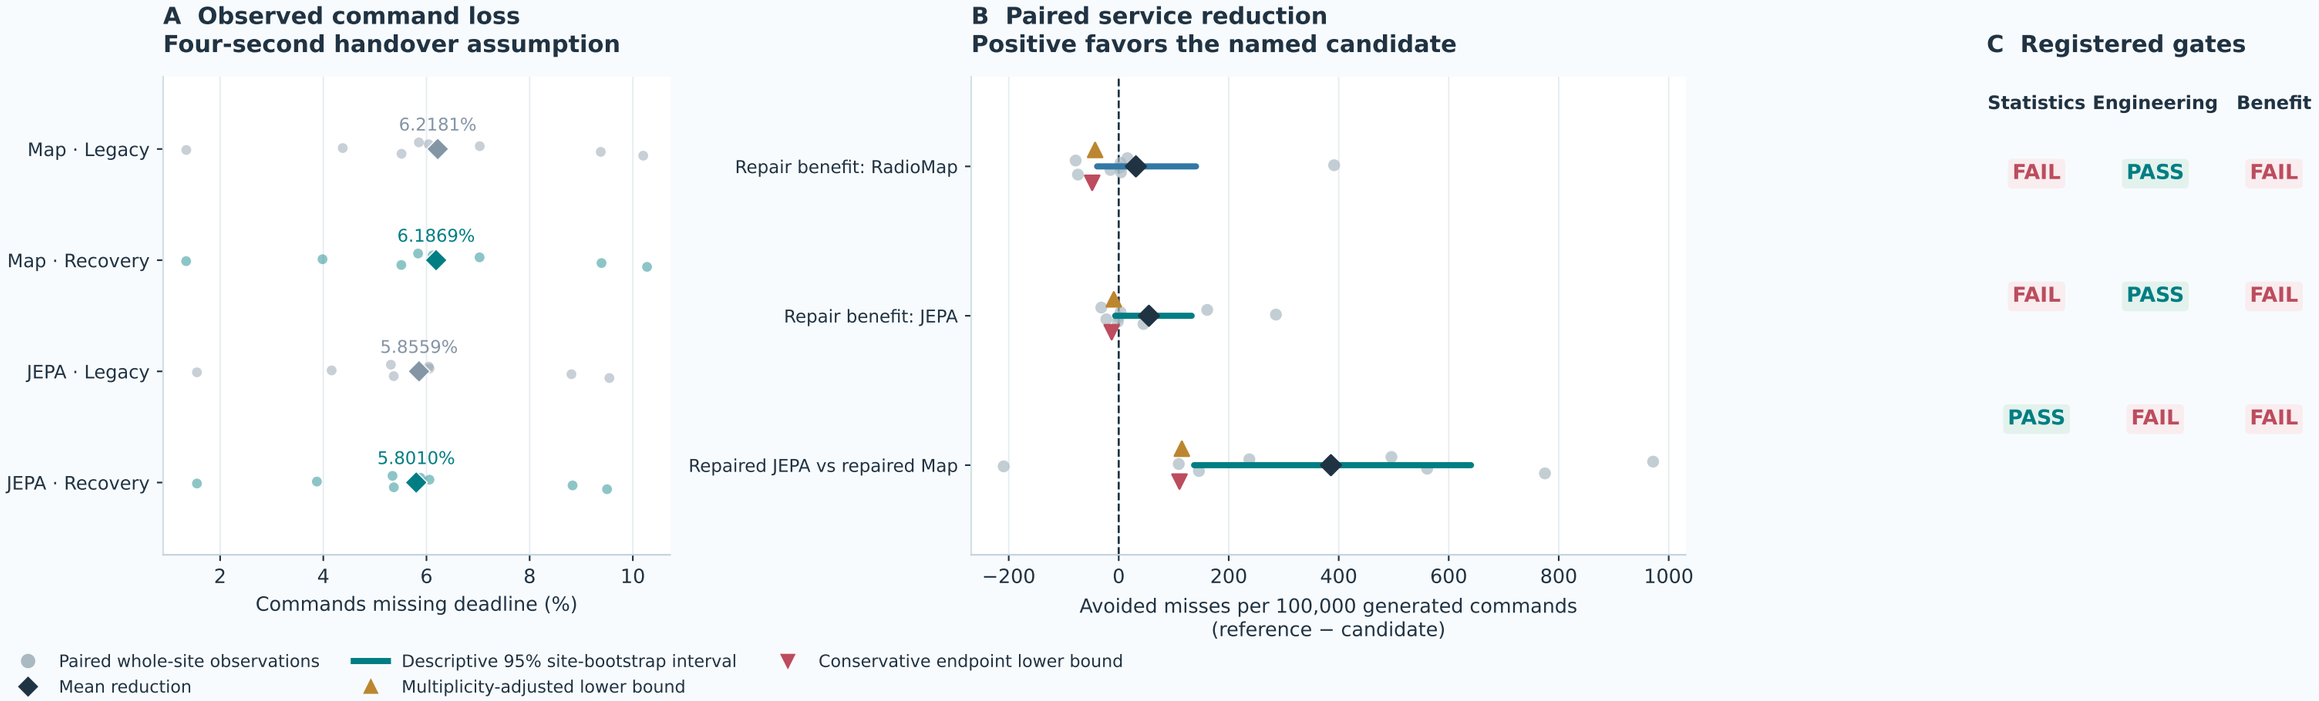

C Registered gates

Statistics	Engineering	Benefit
FAIL	PASS	FAIL
FAIL	PASS	FAIL
PASS	FAIL	FAIL

All three one-sided primary comparisons retain the 1 − 0.05/3 bound; both reduction lower bounds must exceed zero. Intervals: 20,000 whole-site bootstrap draws, conditional on fixed weights.
Endpoint sensitivity counts pending commands as candidate misses and reference successes. Engineering gates cover worst-decile loss, silence, original video and bulk.
Source / causal / paid completion / offline integrity: True. Measured profile exceedances remain paid capacity diagnostics.
Whole controller-package effects do not establish JEPA-objective necessity, hardware safety, production readiness or SOTA.

PRIOR AGGRESSIVE 4 s REPAIR FAILED DEVELOPMENT: RadioMap +5.505 pp · JEPA +4.748 pp. That result remains unchanged.

This independent cost-aware study uses disjoint new site IDs. Prior failed study: jepa_repair/figures/confirmation.svg