Measured Wi-Fi transfer: numerical mapping wins the registered primary comparison

Frozen RadioJEPA · same support and observed queries · validation-selected numerical controls

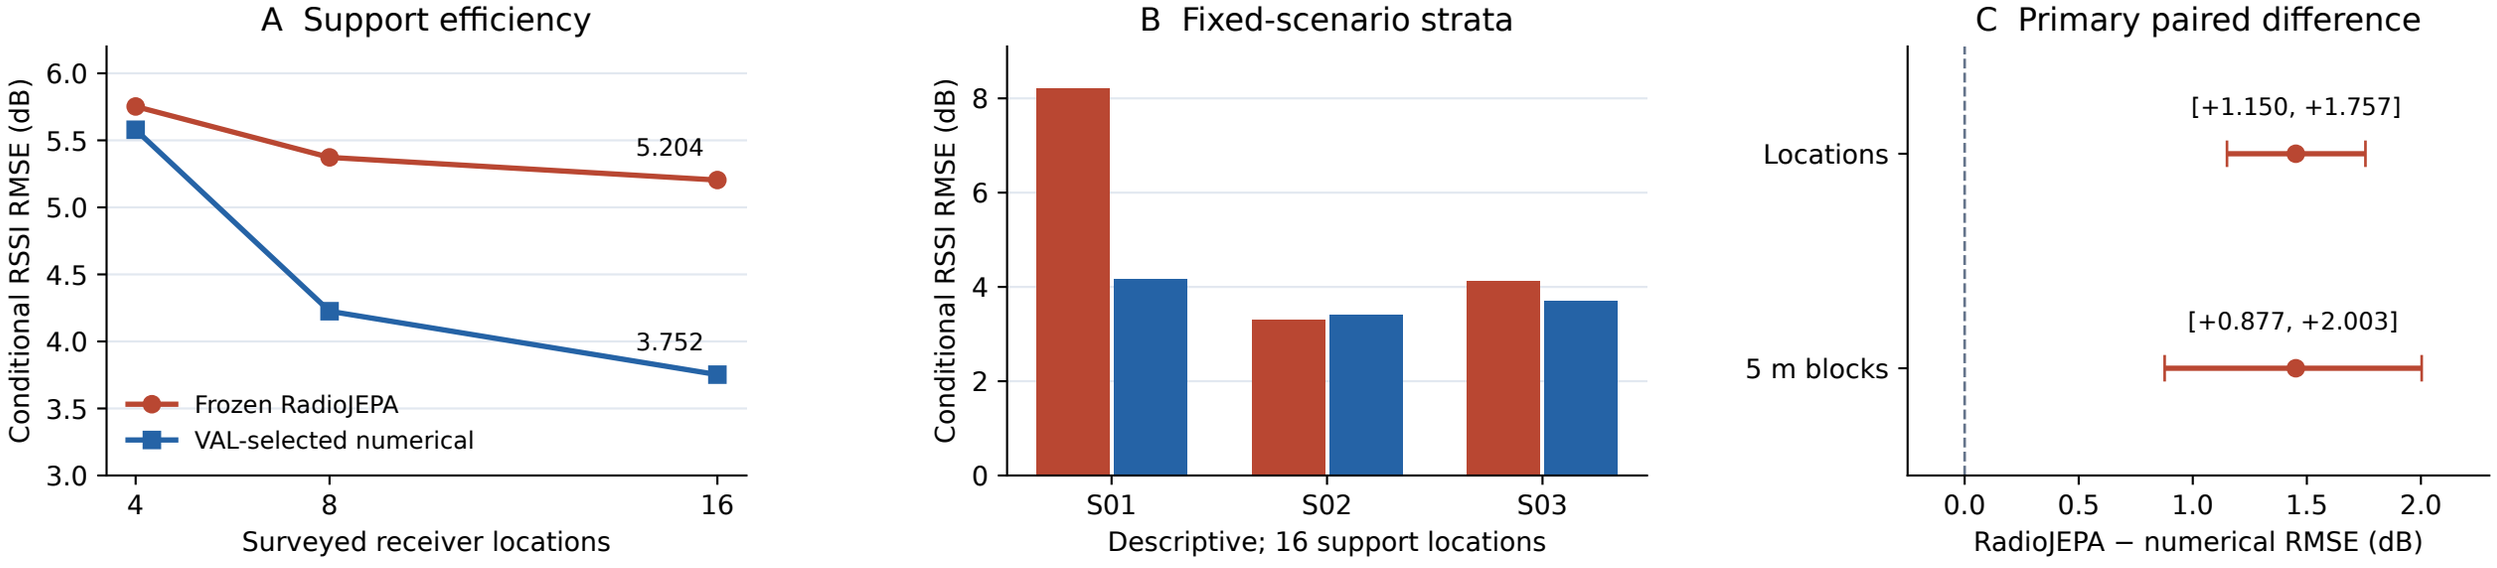

UVIndoorLoc-RTT&RSSI v1 (Matey-Sanz et al., CC BY 4.0) · 87 TEST locations / 174 phone-location units

Positive values favor numerical mapping

Observed successful 5180 MHz reports only. Fixed support/members; empirical 95% resampling intervals. No hardware or SOTA qualification.