
Forecast freshness, radio resources and whole-scan sensing


100 simulated robots × 60 s · 4 s handovers · 8 confirmation sites · 64 factual runs · original fixed model weights

Four fixed nested stages. Final package is the only primary candidate; intermediate stages are descriptive and cannot be selected.

A Mean fleet command loss

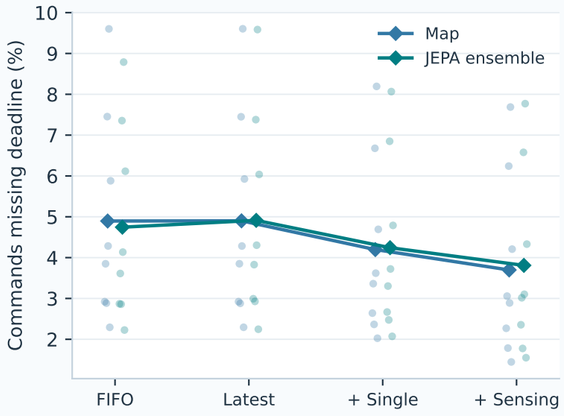


B Three registered primary contrasts

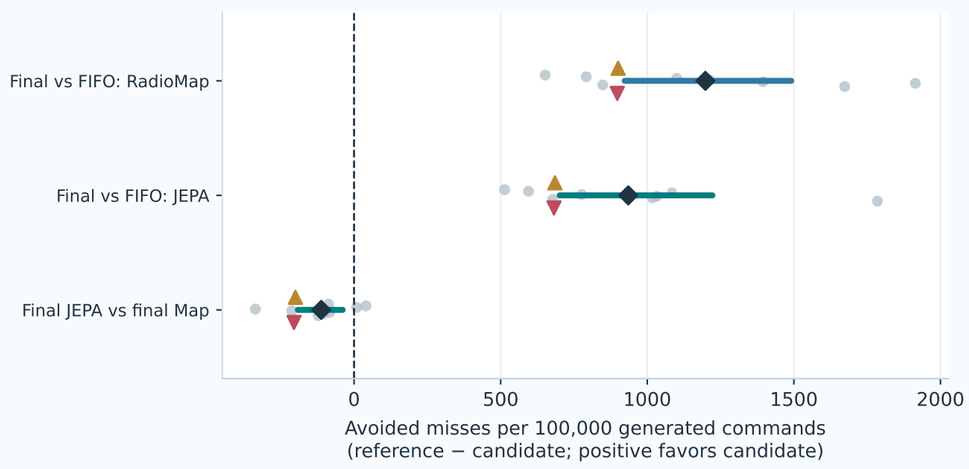


C Registered primary gates

Statistics	Engineering	Benefit
PASS	PASS	PASS
PASS	PASS	PASS
FAIL	FAIL	FAIL


D Worst-decile command loss

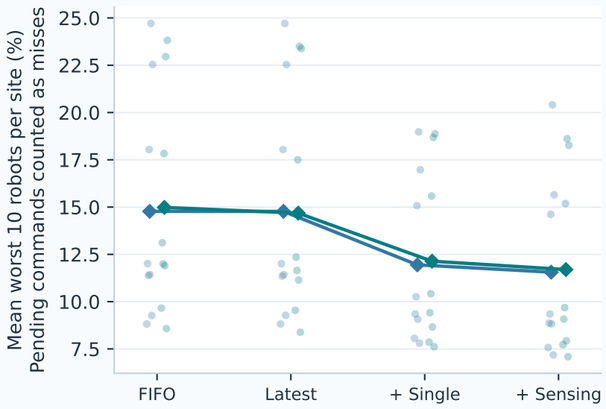

E Nested component contrasts: descriptive only

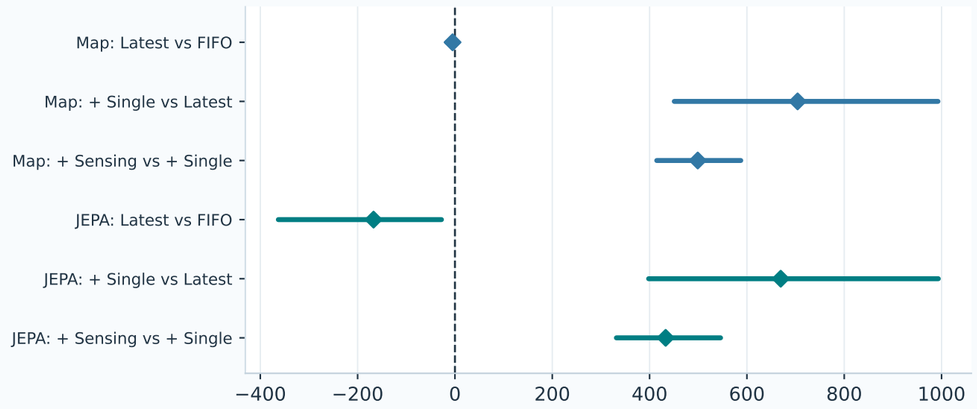

F Longest observed control silence

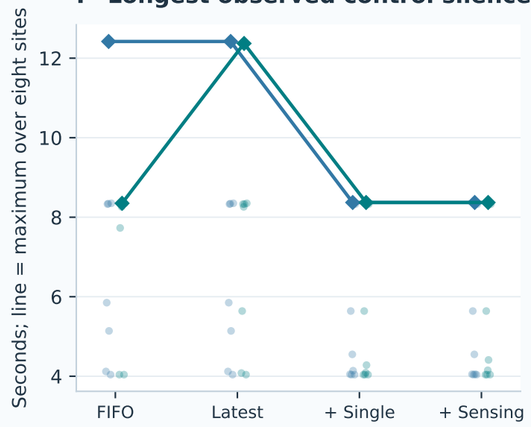

Eight paired whole-site observations
Mean primary reduction
Descriptive 95% site-bootstrap interval
Multiplicity-adjusted lower bound
Conservative endpoint lower bound

Development final − FIFO: Map -1.208 pp; JEPA -0.915 pp; status: go. No tuning or intermediate-stage substitution.
All three primary tests retain 1 − 0.05/3 bounds from 20,000 whole-site bootstrap draws; observed and conservative pending-command bounds must both favor candidate.
Engineering gates retain worst-decile loss, maximum silence, original video and bulk margins. Source / causal / paid / exact offline integrity: True.
Fixed original JEPA ensemble is one treatment. No new fitting, matched-query RF-accuracy claim, JEPA-objective necessity, hardware qualification or SOTA claim.

Earlier failures, nulls and gates remain unchanged. New stack sites are disjoint from both prior studies.

artifacts/jepa_repair/figures/confirmation.svg

artifacts/costaware_recovery/figures/confirmation.svg