Prospective confirmation of the development-selected JEPA

100 simulated robots × 60 s · 8 new sites · 3 independently trained members per new family · 128 runs + 8 replays

Every registered reference remains visible; qualification is evaluated separately for each comparison.

A Observed command loss
0.03 s handover assumption

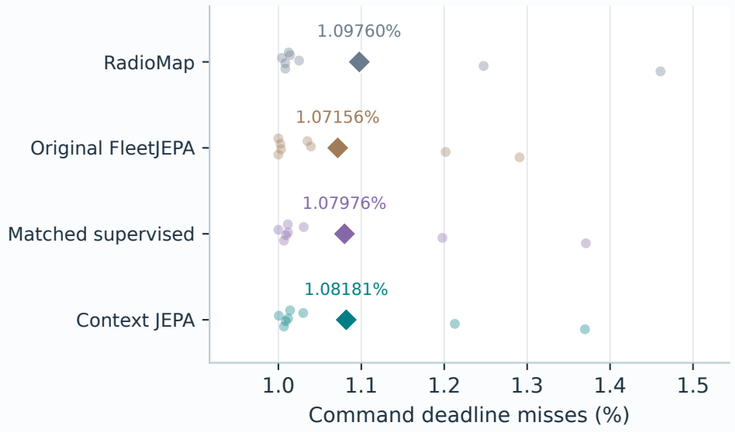

B Paired service improvement
0.03 s handover assumption

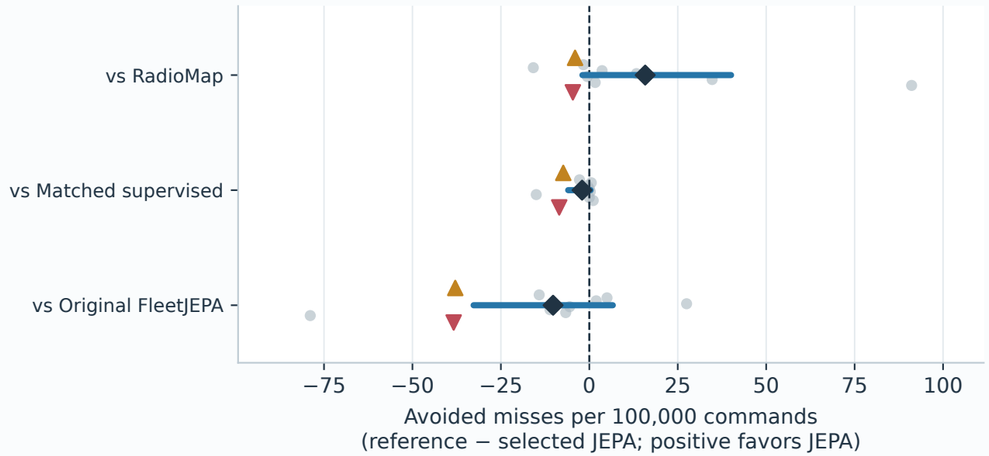

C Registered qualification

Statistics	Engineering	Qualified
FAIL	PASS	FAIL
FAIL	PASS	FAIL
FAIL	FAIL	FAIL

D Observed command loss
4 s handover assumption

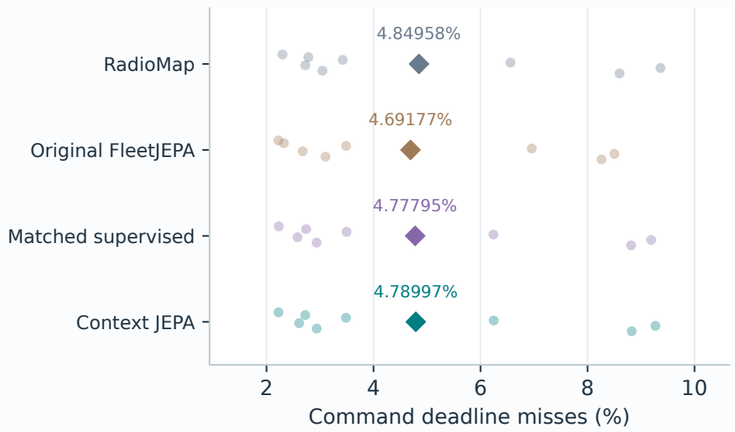

E Paired service improvement
4 s handover assumption

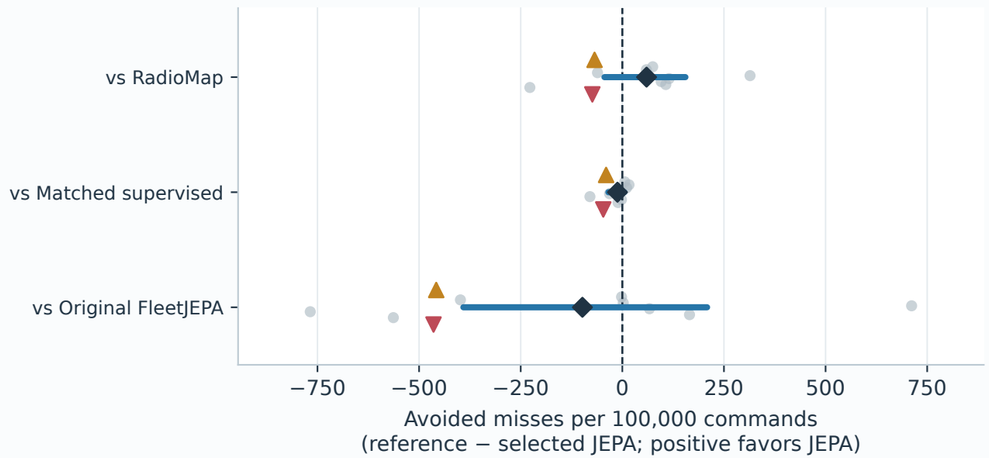

F Registered qualification

Statistics	Engineering	Qualified
FAIL	PASS	FAIL
FAIL	PASS	FAIL
FAIL	FAIL	FAIL

Eight paired sites · Descriptive 95% site-bootstrap interval · Conservative endpoint lower bound
Mean reduction · Multiplicity-adjusted lower bound

Statistics: both one-sided 99.1667% lower bounds must exceed zero; 20,000 whole-site bootstrap draws, six-comparison budget.
Pending commands are misses for the candidate and successes for the reference in the endpoint check. Intervals condition on the three frozen members.
Integrity/causality/replay gate: PASS. Actual runtime overrun: YES. Engineering covers worst-decile command loss, maximum silence, original video and bulk delivery.
Shared procedural warehouse CAD, stationary and hidden-drift sites; simulation only. Research gates do not establish physical-car performance, production safety, EMA necessity or SOTA.