



KAY9 HYDRO TECH PARKING

Parking System Manufacture

AUTOMATIC CAR PARKING SYSTEM

Contact Information



Bhavin Shah

No.: +91 9867932460

Email: kay9hydrotechparking@gmail.com



Structured Products

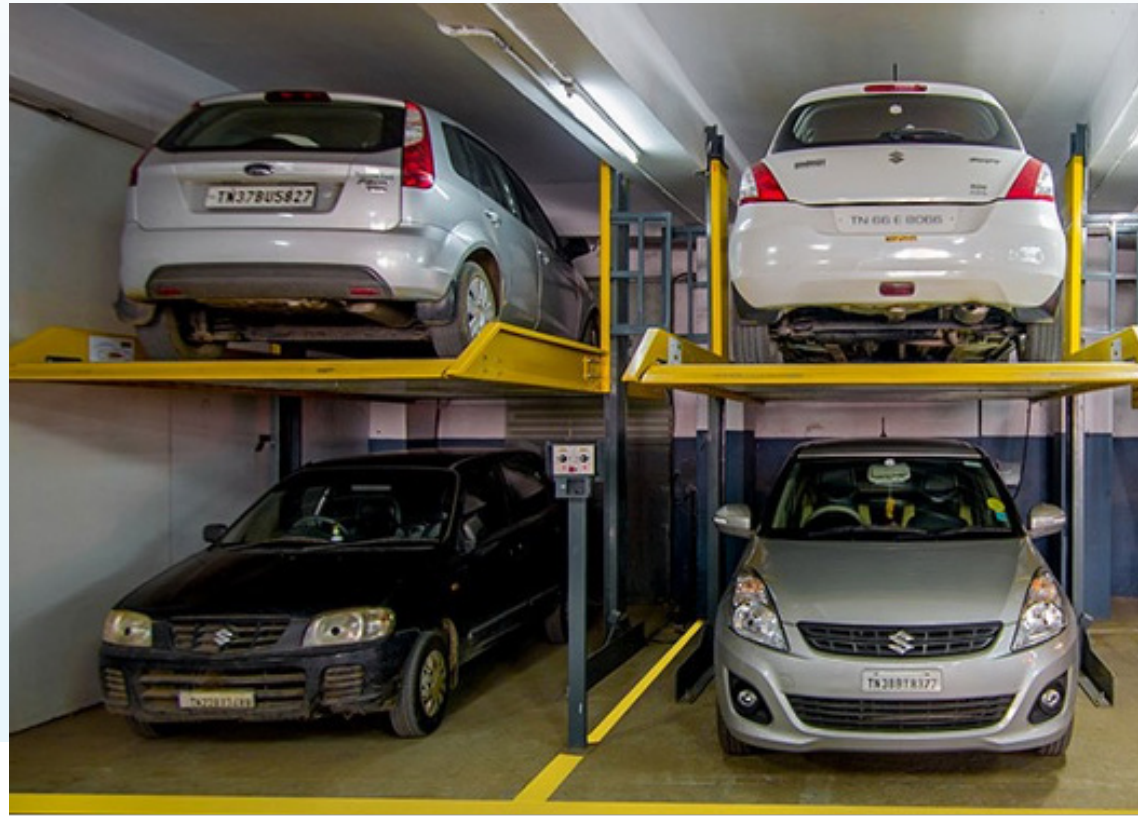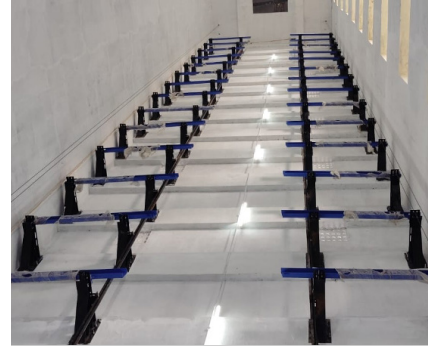

Two Level Two Post Stack Parking (Dependent System)

This is a two level dependent car parking system; where one car is parked on the ground level and one on the platform (first level). The car on the ground level need to be moved out before parking/removing the car on the raised platform.

BENEFITS

1. Silent operation.
2. Low maintenance cost.
3. Design for quick installation and dismantle.
4. Hot dipped galvanized floor pallets to reduce dead weight and increase durability.
5. Electromagnetic locking mechanism from start to end at each position.
6. Limit switch with adjustable position to prevent damage to the car on the pallet.
7. Remote switch box with keys/push button for easy operation.




Models	Length (L)	Width (W)	Height (H)	H1	H2	Car Caregory
TPS S	4000	2300	3400	1700	1600	Small cars
TPS M	4000	2500	3600	1800	1700	Med sized Sedan
TPS B	4500	2700	4000	2000	1900	Large cars/SUV's

Note: Sizes can be varied as per the client requirements and site conditions.

Two Level Two Post Stack Parking (Dependent System)

General specification :

1. Fully hydraulic based system.
2. Load capacity 1800Kg.
3. Standard dimension for the unit is L 4000 X W 2600 X H 4000.
4. Very less power consumption (1.5kw./2HP).
5. Lifting time 35-45 sec.
6. Key operated to prevent unauthorized use.
7. Totally enclosed Compact Power pack system.
8. Imported Quality hydraulic valve to operate the system.
9. 24v DC. Control circuit is used to prevent any electrical shock.
10. Heavy fabricated structural work for long life.
11. Double coated Painted structural items.

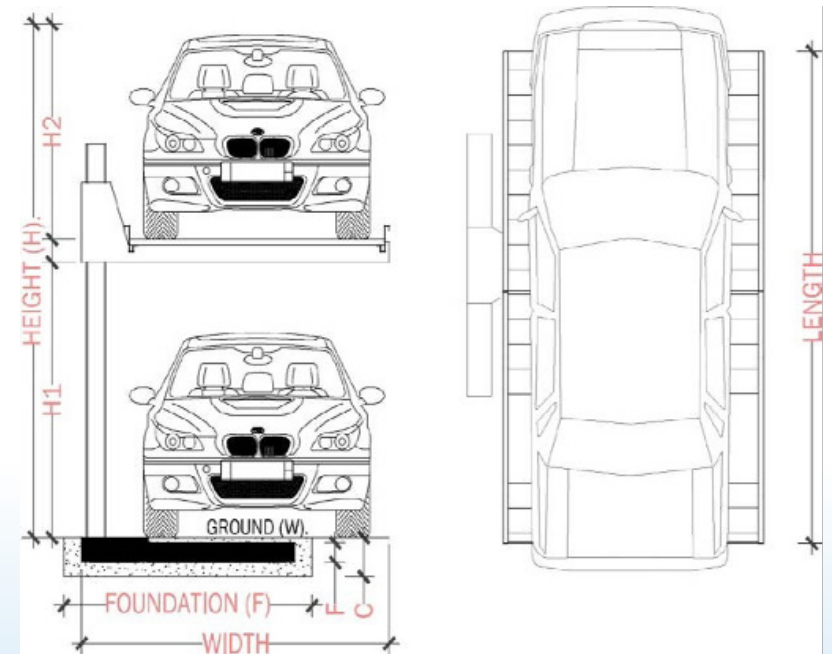

Three level Stack Parking (Dependent System)

This is Parking System offers parking for 3 cars; one on the ground and two on the two upper levels. The car on the ground level will need to be removed before lowering the first level platform; similarly the ground and first level cars will need to be removed before lowering the second level platform.

BENEFITS

1. Two platforms per system.
2. Four post structure system can be installed in door and out door.
3. Hot dipped galvanized floor pallets to reduce dead weight and increase durability.
4. Electromagnetic locking mechanism from start to end at each position.
5. Remote switch box with keys/push button for easy operation.
6. Dual height limit switches on each machine (extremely safe & reliable)
7. Can be customized to suit a client's particular application.




Models	Length (L)	Width (W)	Height (H)	H1	H2	H3	Car Caregory
TLSPS	4000	2300	5300	1700	1700	1700	Small cars
TLSPM	4800	2500	5600	1800	1800	1800	Med sized Sedan
TLSPB	5500	2600	6000	2000	1900	1900	Large cars/SUV's

Note: Sizes can be varied as per the client requirements and site conditions.

Three level Stack Parking (Dependent System)

General specification :

1. Fully hydraulic based system.
2. Load capacity 2000 Kg. of each pallet.
3. Standard dimension for the unit is L 4500 X W 2500 X H 6200.
4. Very less power consumption (2.2kw./3HP)
5. Lifting time 35-45 sec. each pallet.
6. Key operated to prevent unauthorized use.
7. Totally enclosed Compact Power pack system.
8. Imported Quality hydraulic valve to operate the system.
9. 24v DC. Control circuit is used to prevent any electrical shock.
10. Heavy fabricated structural work for long life.
11. Double coated Painted structural items.

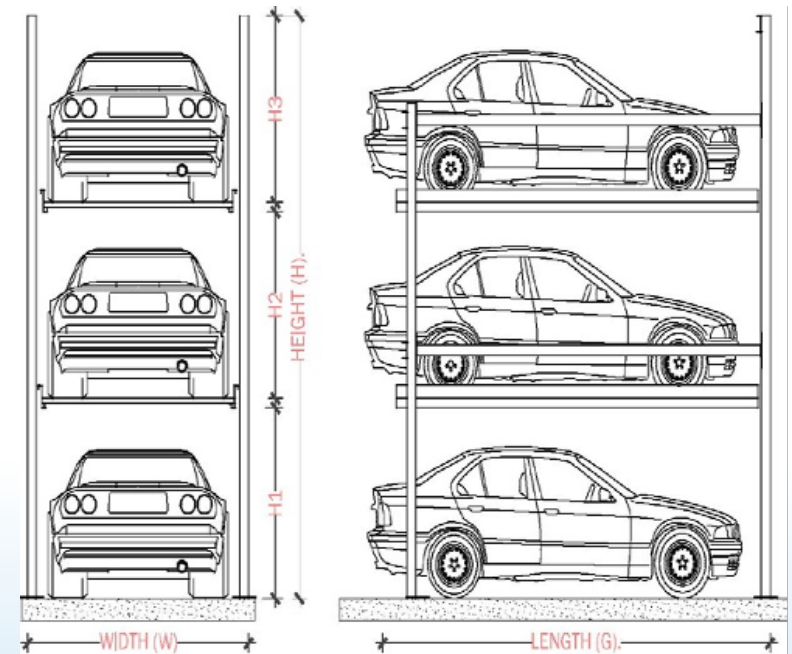


Four Post Three level Pit Stack Parking (Pit+Ground +1)(Dependent System)

This is Parking System offers parking for 3 cars; one on the ground and one in the pit and one on the first level. The car on the ground level will need to be removed before lowering the first level platform or lifting up of the platform that goes into the pit.

BENEFITS

1. Three platforms per system.
2. Four post structure system can be installed in door and out door.
3. Hot dipped galvanized floor pallets to reduce dead weight & increase durability.
4. Electromagnetic locking mechanism from start to end at each position.
5. Remote switch box with keys/push button for easy operation.
6. Dual height limit switches on each machine (extremely safe & reliable).
7. Can be customized to suit a client's particular application.

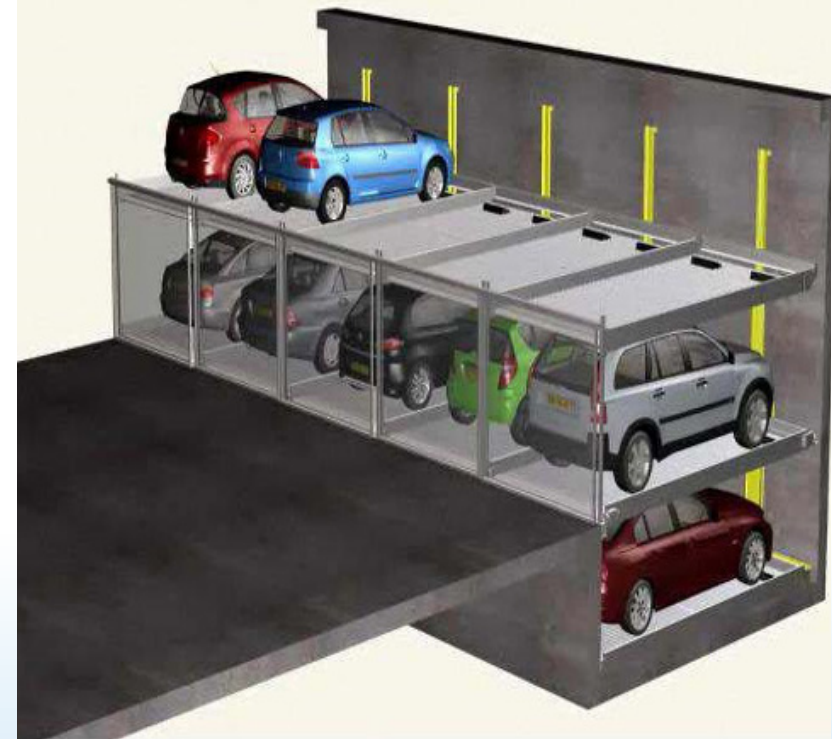


Models	System Length (L)	Available length inside	System Width (W)	Inside width	Height (H)	H1	H2	H3	Pit depth	Car Caregory
TLSPS	4500	4300	2300	2100	5300	1700	1800	1700	1900	Small cars
TLSPM	5500	5300	2500	2300	5600	1800	1900	1800	2000	Med sized Sedan
TLSPB	5500	5300	2700	2500	6000	1900	2000	1900	2100	Large cars/SUV's

Note: Sizes can be varied as per the client requirements and site conditions.

Four Post Three level Pit Stack Parking (Pit+Ground +1)(Dependent System)

General specification :


1. Fully hydraulic based system.
2. Load capacity 2000 Kg. of each pallet.
3. Standard dimension for the unit is L 5500 X W 2500 X H 6200.
4. Very less power consumption (2.2kw./3HP)
5. Lifting time 35-45 sec. each pallet.
6. Key operated to prevent unauthorized use.
7. Totally enclosed Compact Power pack system.
8. Imported Quality hydraulic valve to operate the system.
9. 24v DC. Control circuit is used to prevent any electrical shock.
10. Heavy fabricated structural work for long life.
11. Double coated Painted structural items.

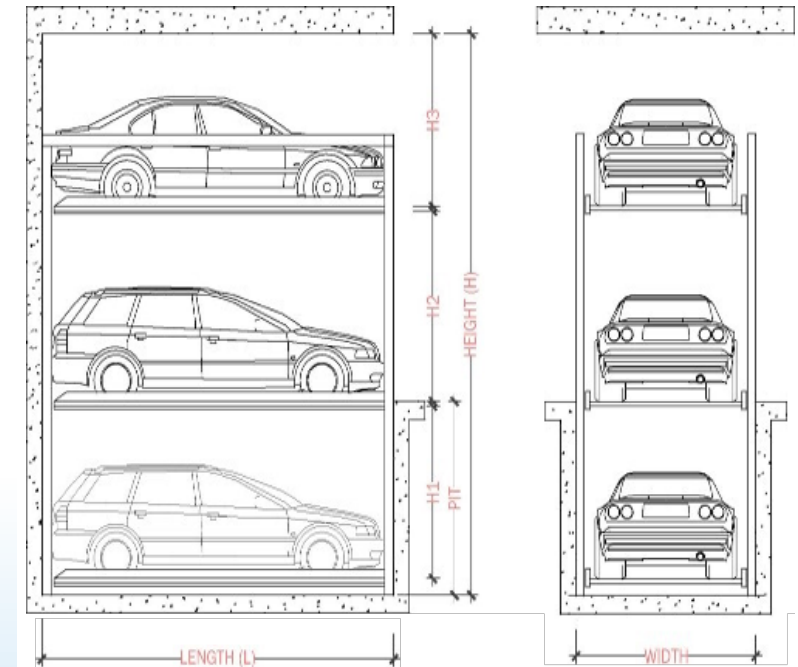

Vertical horizontal parking system (Puzzle system)

Multiple parking cars to the limited parking space ,save a great deal of room.

Except the top floor ,each floor has a spare parking space and front-rear guide rails. Each parking space has a pallet which moves horizontally on the guide rail. The pallets on the top floor make up-down movements while the ones on the ground floor make left-right horizontal movement, the other ones can move either left to right or up and Down through continuous space shift, parking and fetching a car can be realized.

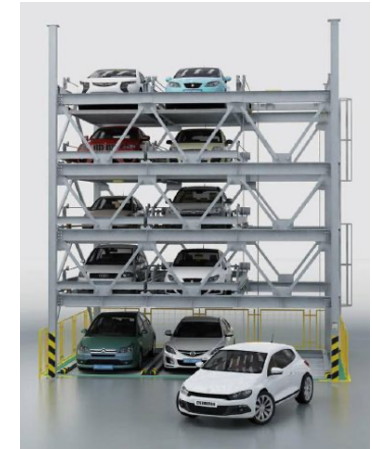

Main Technical Specification


1. Elevating speed : 6.3m/min.
2. Horizontal-moving speed : 7m/min.
3. Noise : $\leq 60\text{Db(A)}$.
4. Max. collection time; 90s.
5. Hoist or lower the drive way : roller chain, steel wire rope (optional).
6. Control way : PLC.
7. Operational type: ten keys, touch screen, IC card (optional).



Models	L	W	H1	H2	H3	H
K	6200	2600	2360	1680	1600	9000
T	6400	2700	2010	1680	1600	8650
D	6200	2600	2010	1680	1600	8650
Z	6000	2500	2010	1680	1600	8650
X	5500	2400	2010	1680	1600	8650

TOWER PARKING

A lifting channel is designed in the middle of the equipment and the parking spaces are divided in two sides. Each parking space has a car carrying pallet which can make a horizontal moving. There is a lifting case designed in the channel can be lifted to the spaces in any layers when dragged by a lifting motor. The car carrying pallet will be drawn or sent to the spaces in both sides by mechanical hands. The car can go out or in when the cases drops to the same level with the ground.

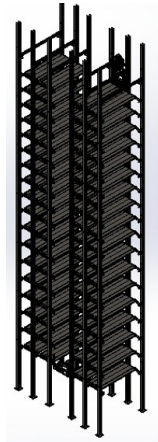


Main Character:

1. Less land area coverage and high usage rate of space.
2. Steady operation without noise and fast operating speed to save parking and releasing time.
3. Storage situation will be inspected by photoelectric devices. The operator will grasp each action of parking and releasing process by an intelligent button-pressing operation.
4. Multi-protection devices are designed for anti-fall, anti-crashing, anti-overloading.

Dimension of the system:

Main Technical specifications:

1. Elevating speed : 1.5mtr/min.
2. Sliding speed : 8m/min.
3. Size of cars : 5000mm x 1850mm x 1550mm.
4. Weight of cars : 2000kgs.
5. Max. collection time: 90s.
6. Hoist or lower the drive way: Roller chain, steel wire rope (optional).
7. Control way : PLC.
8. Operational type : Turn keys, touch screen, RFID card (optional).

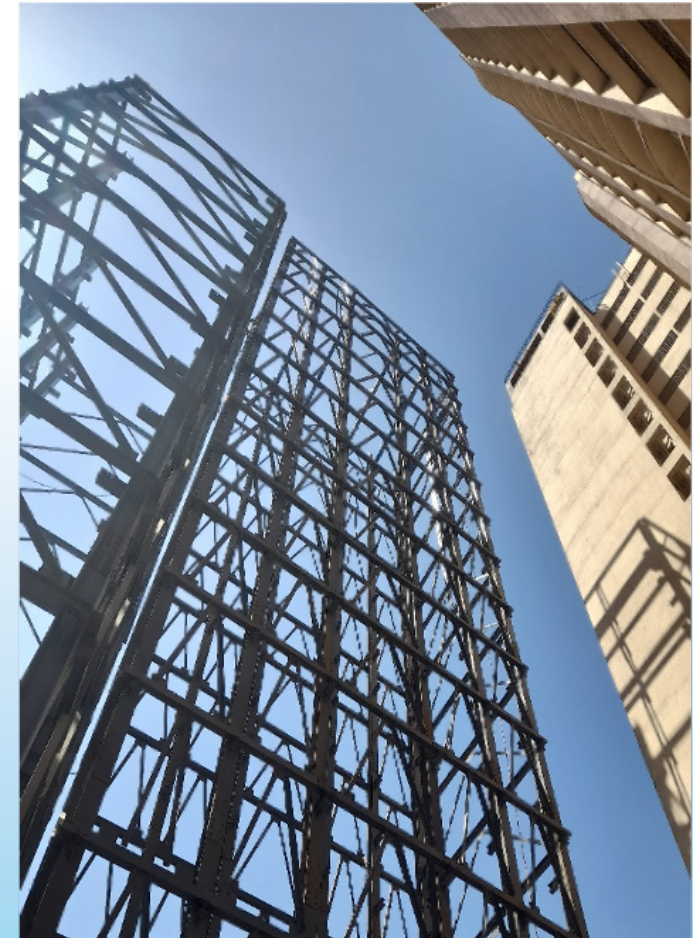

BIKE STACK PARKING SYSTEM

Hydraulic Operation

Two bikes can be parked:

Size Required:


Length - 2.0 meters

Width - 0.8 meters


Height - 1.5 meters

Two Level Parking - 10 Bikes (5.4 Meter Space)

Three Level Parking – 14 Bikes (5.4 Meter Space)

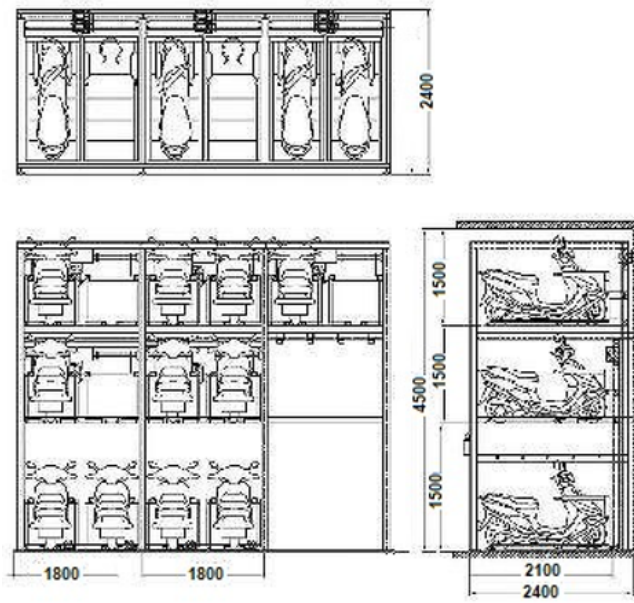

Puzzle Type Bike Parking

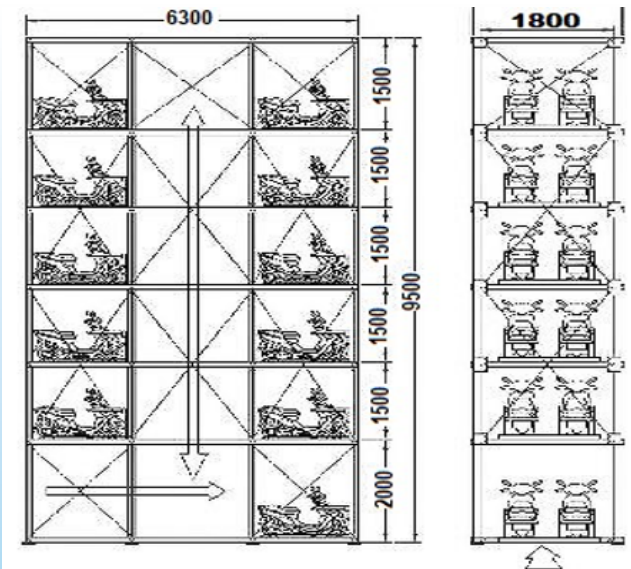

Bike Tower Parking



BIKE STACK PARKING SYSTEM

Technical Specification:

TECHNOLOGY INFORMATION OF MOTORBIKE PARKING		
QTY/SPACES		54
SIZE OF SPACE	LENGTH	2.1M
	WIDTH	0.5M
	HEIGHT	1.5M
	BEARABLE LOAD	210KG
DRIVE MODE		ELECTRIC CHAIN DRIVE
OPERATION MODE		REMOTE SWITCH
DRIVING DEVICE	POWER SOURCE	380V.50/60Hz
	ELECTROMOTOR	6KW
OPERATION TIME		2.5min
SAFETY DEVICE		Photosensitive Control Device



Sr. No	Total Bike	Model No.	Length (m)	Width (m)	Height (m)
1.	54 No. of bikes	9x6	7.3	7.3	6.7
2.	36 No. of bikes	6x6	5.5	5.5	6.7
3.	20 No. of bikes	5x4	5.0	5.0	5.0



KAY9 HYDRO TECH PARKING

Workshop

Umar Compound Industrial
Plot No-PL 06/372
Sopara Phata
Nalasopara East 401209

Office

503 - Hitendra Tower
R M Bhatt Road, Near HDFC Bank
Chikwadi, Borivali West
Mumbai 400092

Contact Information

Bhavin Shah
No.: +91 9867932460
Email: kay9hydrotechparking@gmail.com

