



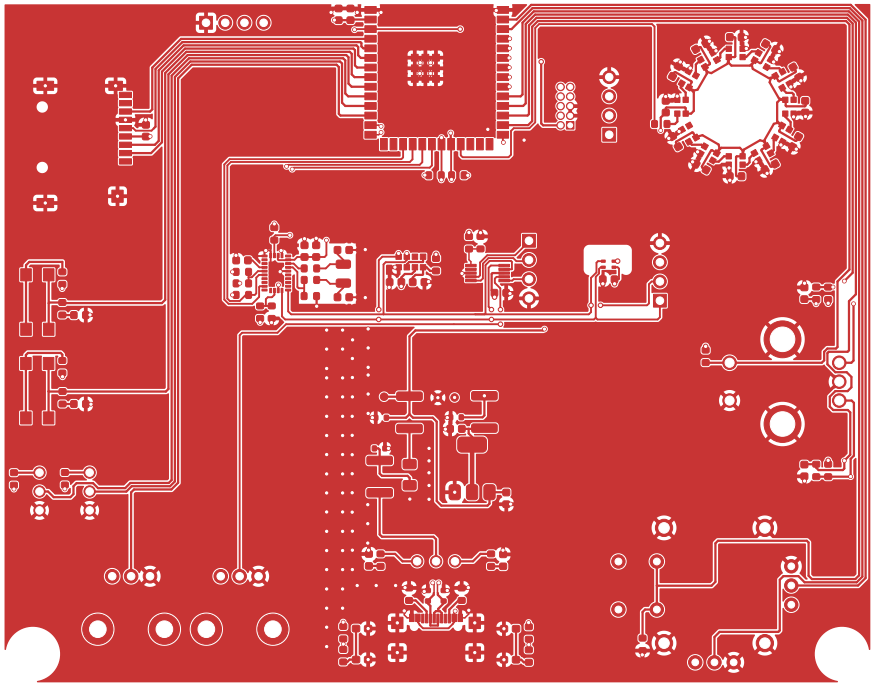


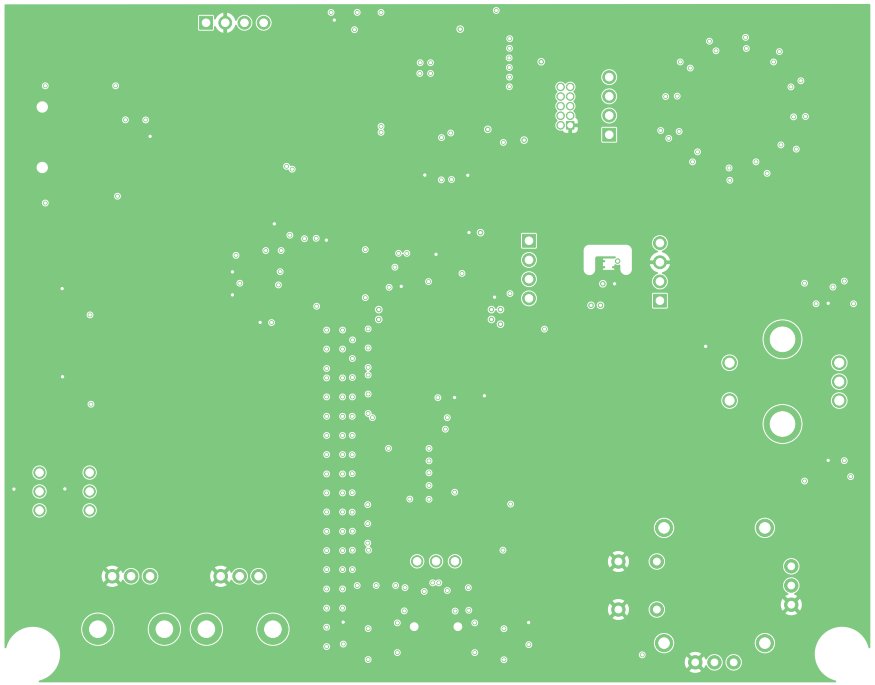

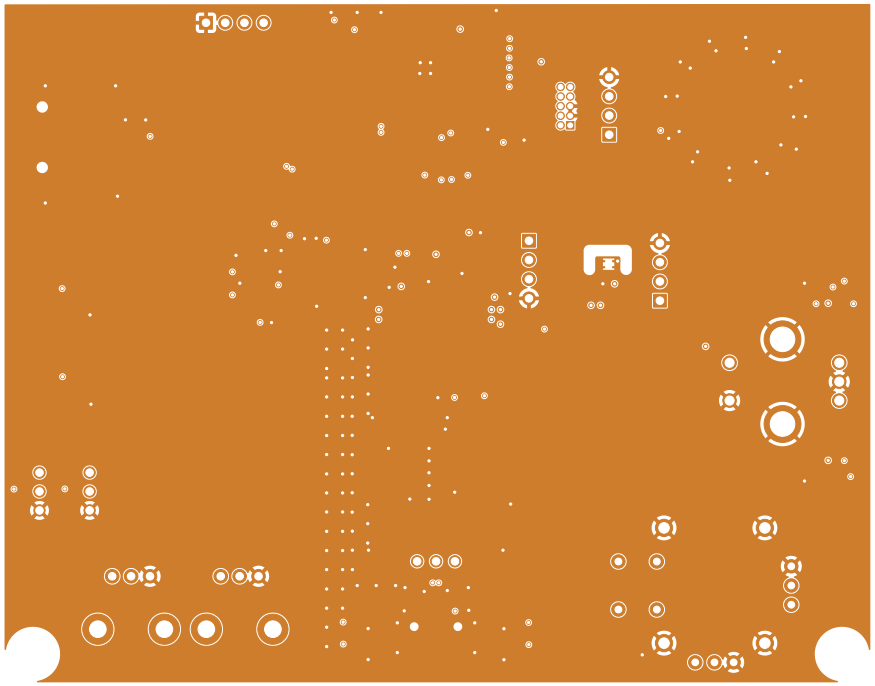

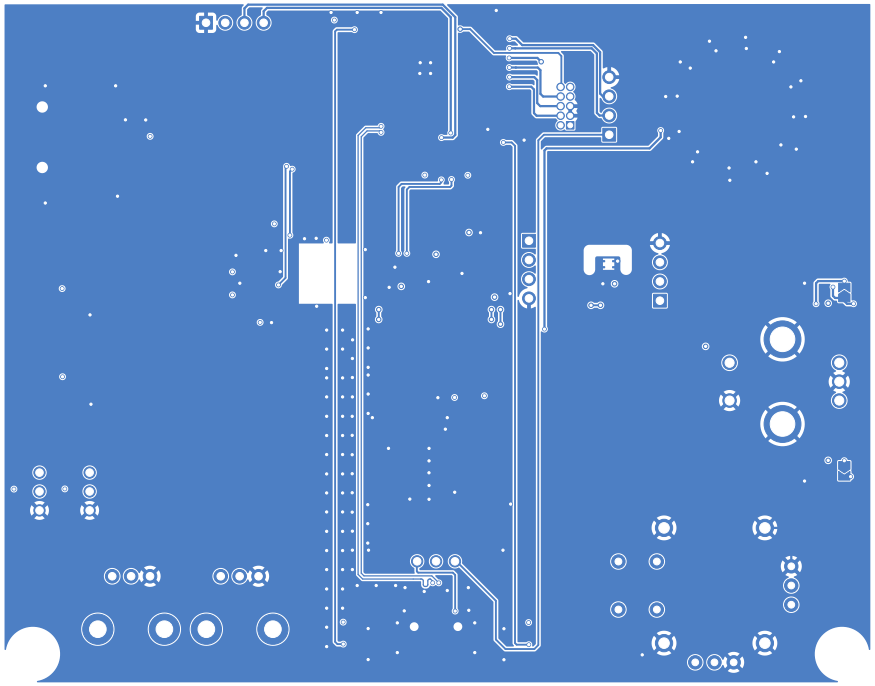


GND 3V3 SCL SDA
I²C-Address:
0x3C (0x3D)
0.96" I²C Display
ESP32-S3-WROOM-1
JLink Edu
TTL
GND
TX
RX
+5V
WS2812B LED ring light
Micro SD card
Gyroscope – BNO085
ToF – VCNL4040
ADC – ADS1015
RH & T – SHT4x
I2C
A0
A1
A2
GND
3V3
SDA
SCL
I²C-addresses:
PU=Pull-Up
PD=Pull-Down
↑0x4A (0x4B)↑
PD PU
↑0x60↑
↑0x48 (0x49)↑
PD PU
↑0x44↑
↑INDIV↑
↑DUAL
Push Button 1
Push Button 2
Tactile Switches
Encoder 24P with Push Button
LDO +3.3V and protections
USB-C flash interface with supply selection
+5V USB
+5V TTL
EN
BOOT
Joystick with Push Button
Poti Analog
Poti connected to ADC
LABOR FÜR
HARDWARENAHE
DIGITALISIERUNG
Mentoring Board
Tobias Gent
&
Daniel Sichler
by

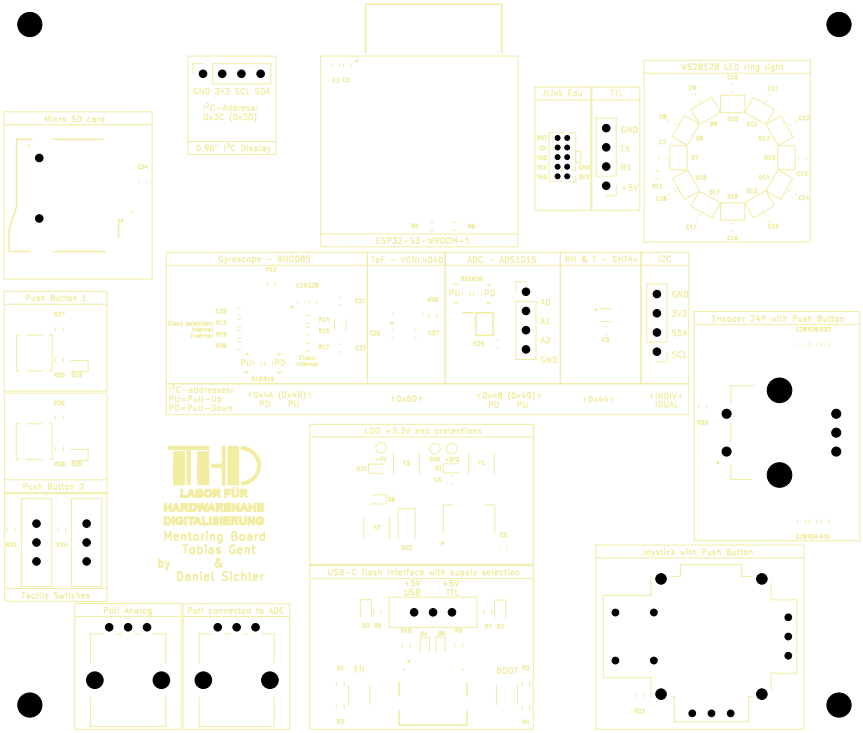