

UNIVERSIDAD POLITÉCNICA DE CHIAPAS


Tema: Act. 2.2 Configuración básica de ruteadores

Nombre del alumno Geovany Guadalupe Gomez Rodas

Nombre de la materia Fundamentos De Redes


Docente Luis Gutiérrez Alfaro


Fecha de entrega: 14/02/2025

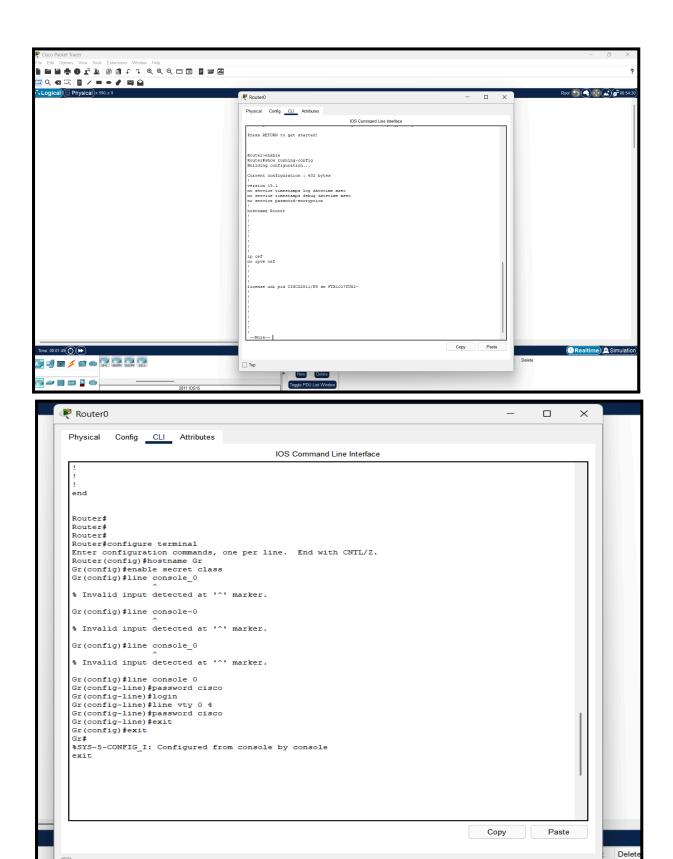


□ Тор

New Delete

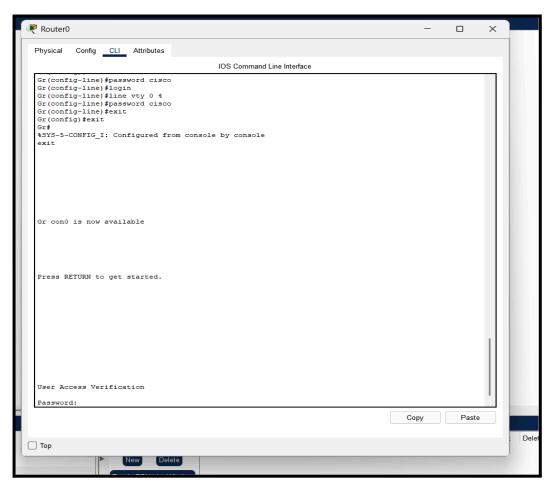

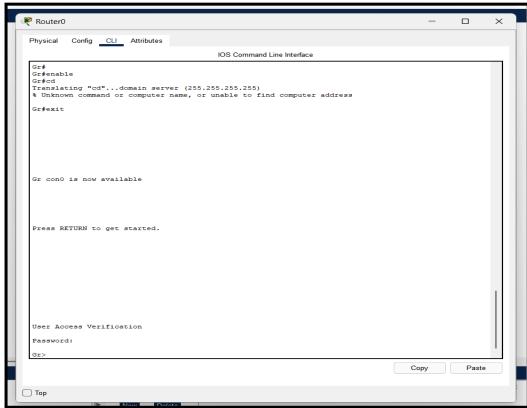

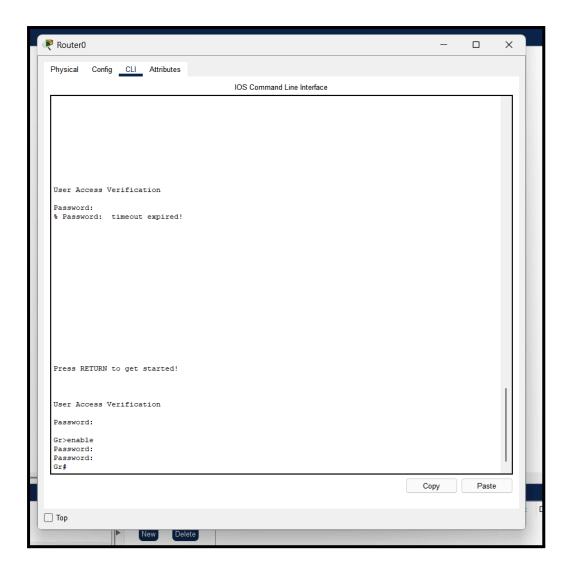

```
comply with U.S. and local laws, return this product immediately.
A summary of U.S. laws governing Cisco cryptographic products may be found at:
http://www.cisco.com/wwl/export/crypto/tool/stqrg.html
If you require further assistance please contact us by sending email to
export@cisco.com.
cisco 2811 (MPC860) processor (revision 0x200) with 60416K/5120K bytes of memory
Processor board ID JAD05190MTZ (4292891495)
2 FastEthernet interface(s)
DRAM configuration is 64 bits wide with parity disabled.
255K bytes of non-volatile configuration memory.
249856K bytes of ATA System CompactFlash 0 (Read/Write)
Press RETURN to get started!
User Access Verification
Password:
Gr> enable
Password:
Password:
Gr#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Gr(config) #interface Fas
Gr(config) #interface FastEthernet 0/0
Gr (config-if) #ip
Gr(config-if) #ip address 192.168.1.1 255.255.255.255.0
% Invalid input detected at '^' marker.
Gr(config-if) #ip address 192.168.1.1 255.255.255.0
Gr(config-if) #no shutdown
Gr(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
Gr(config) #service passwor-encryption
% Invalid input detected at '^' marker.
```

