

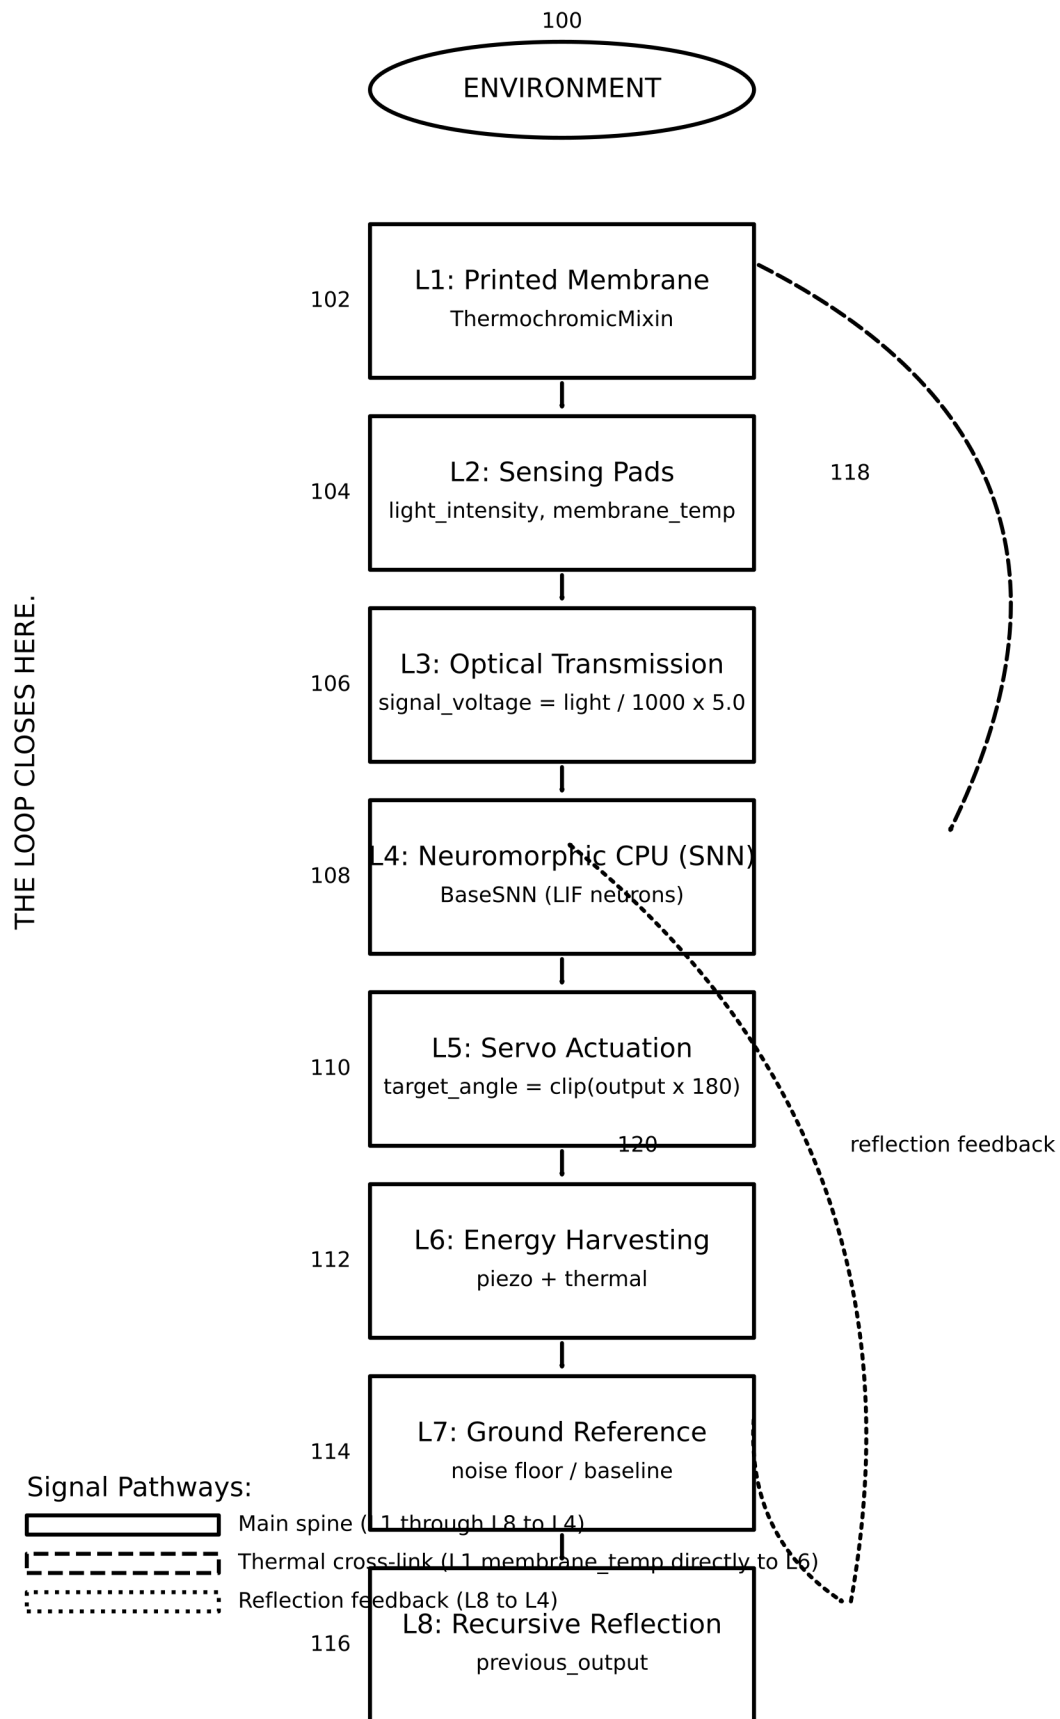


FIG. 1

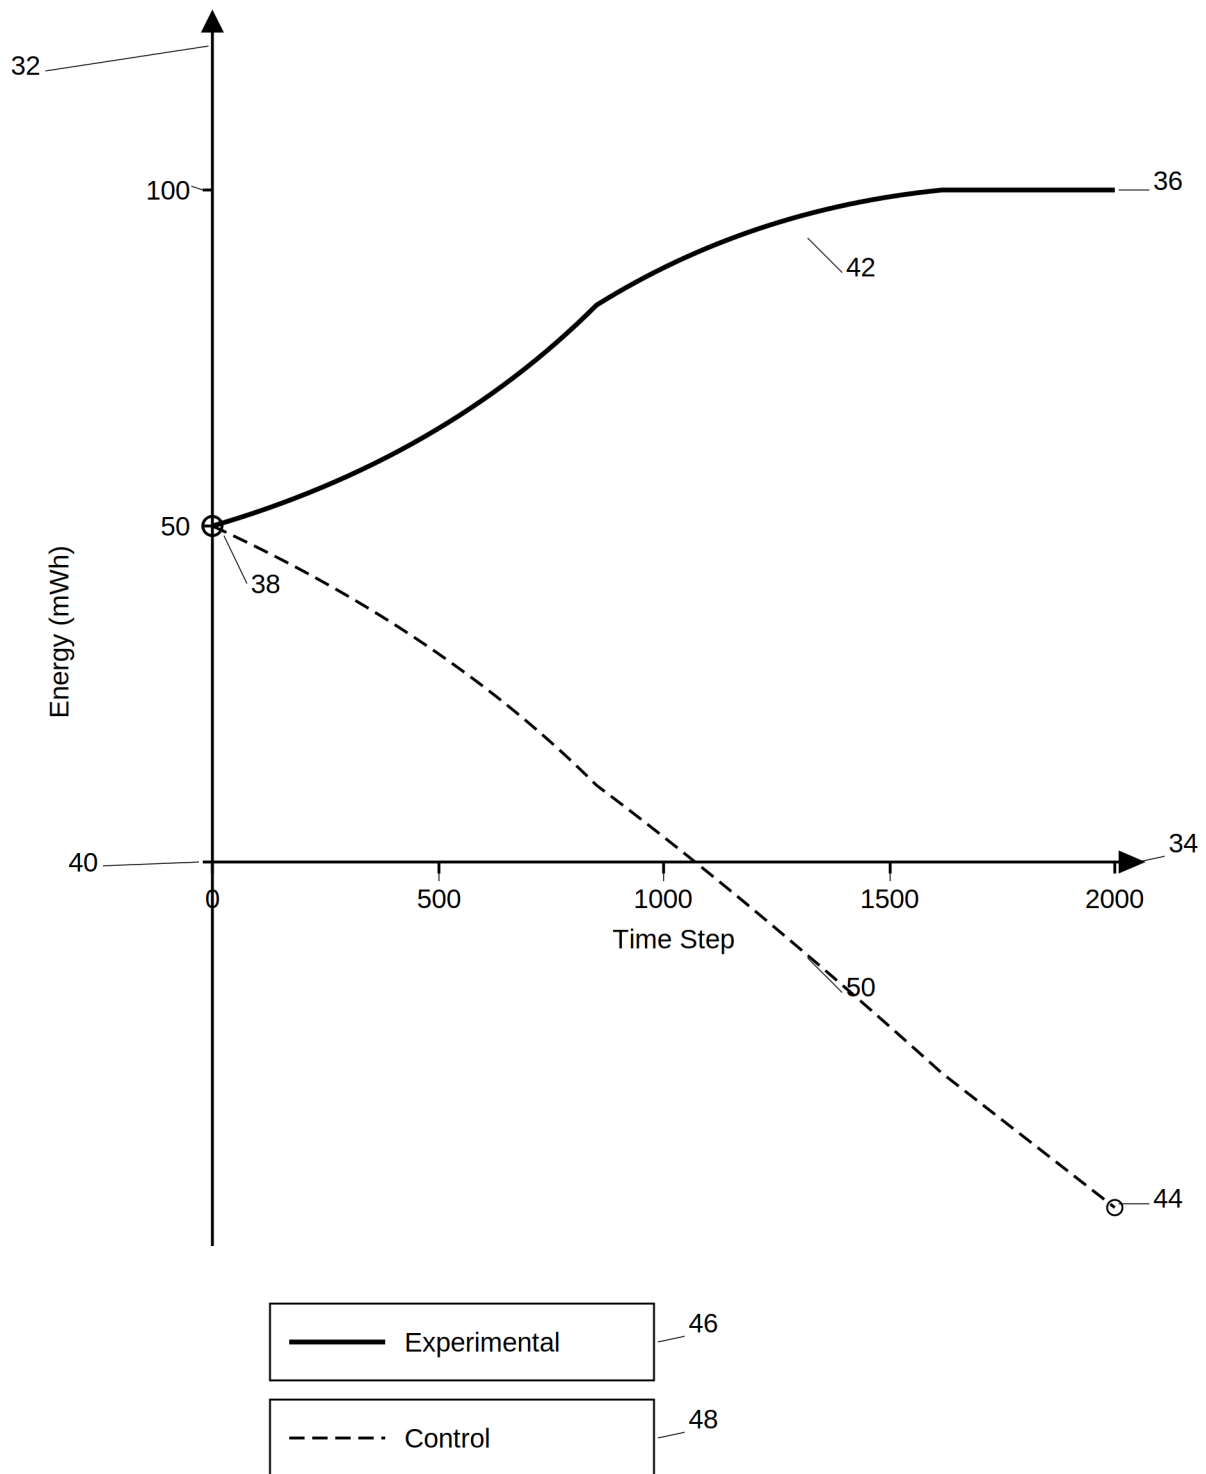


FIG. 2

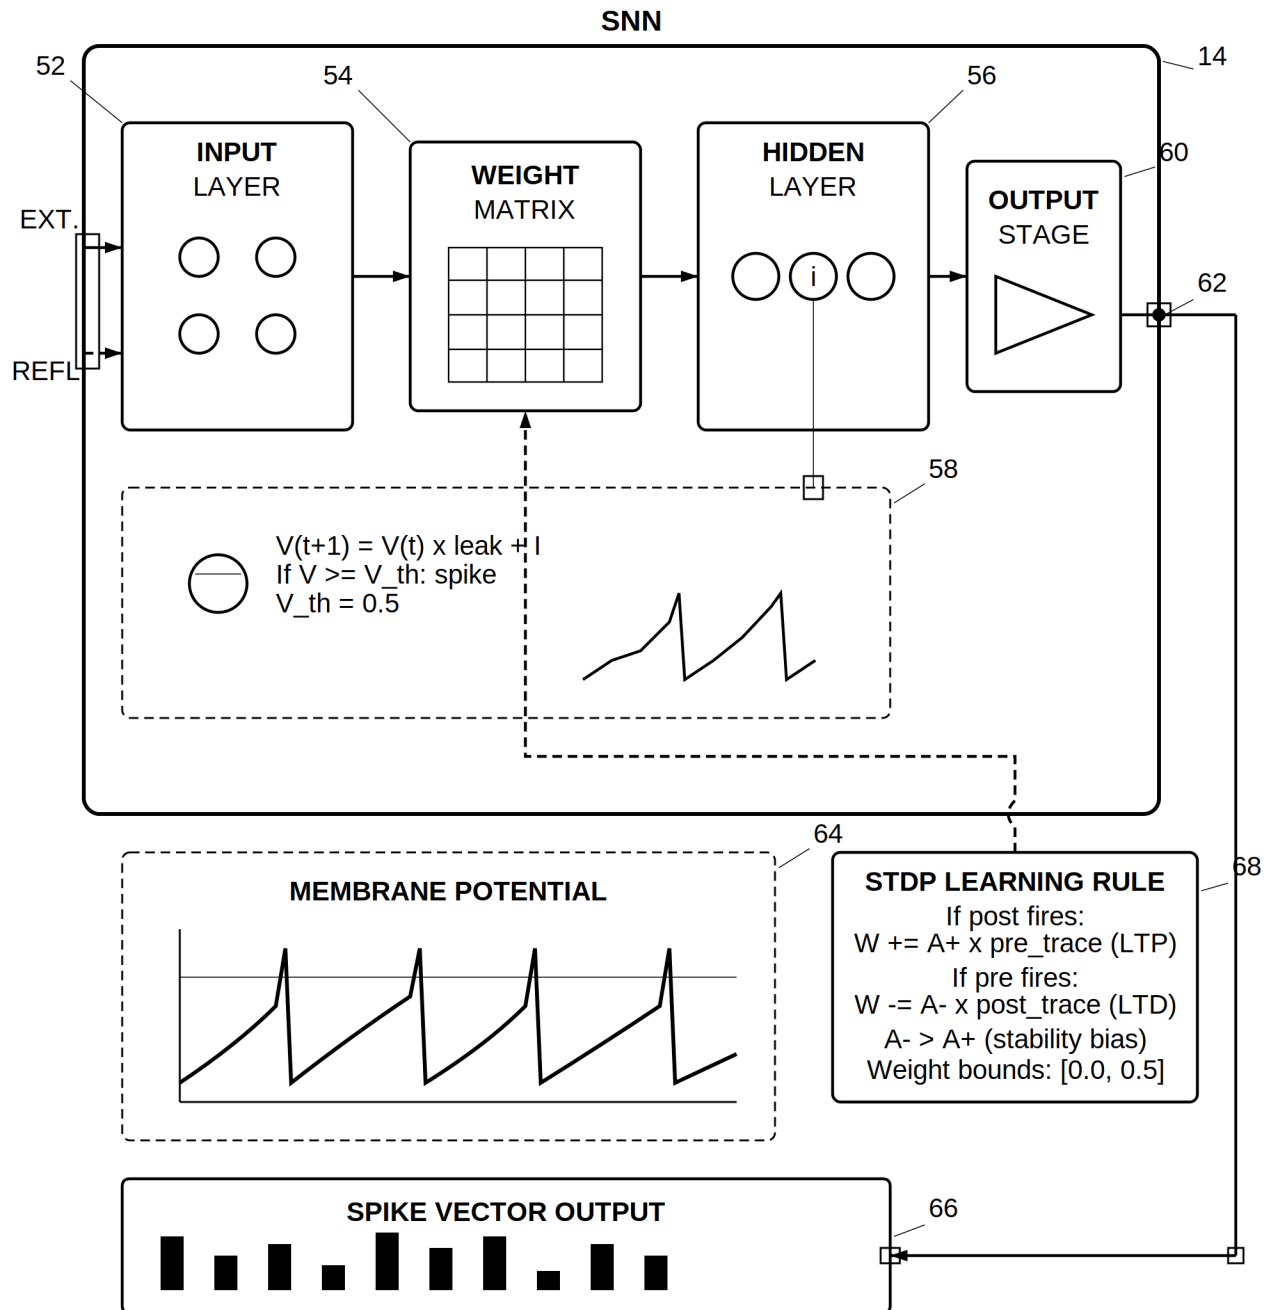
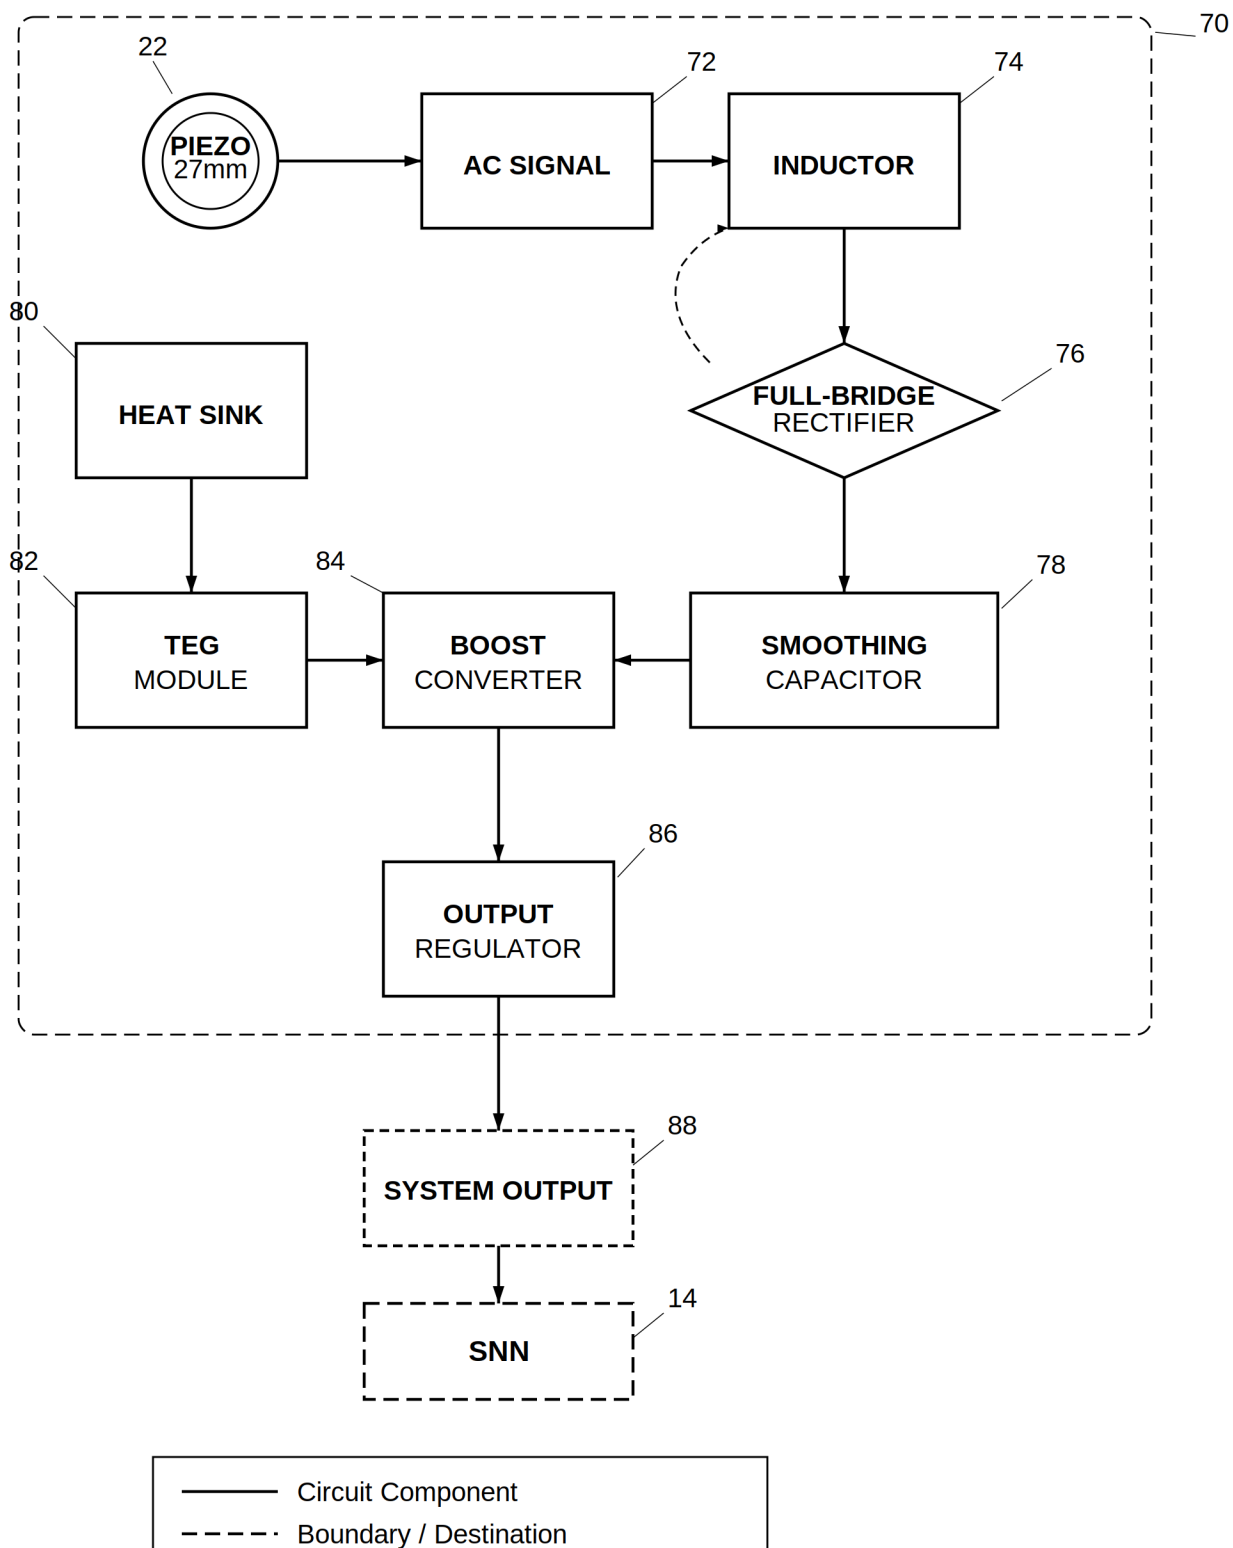


FIG. 3

**FIG. 4**

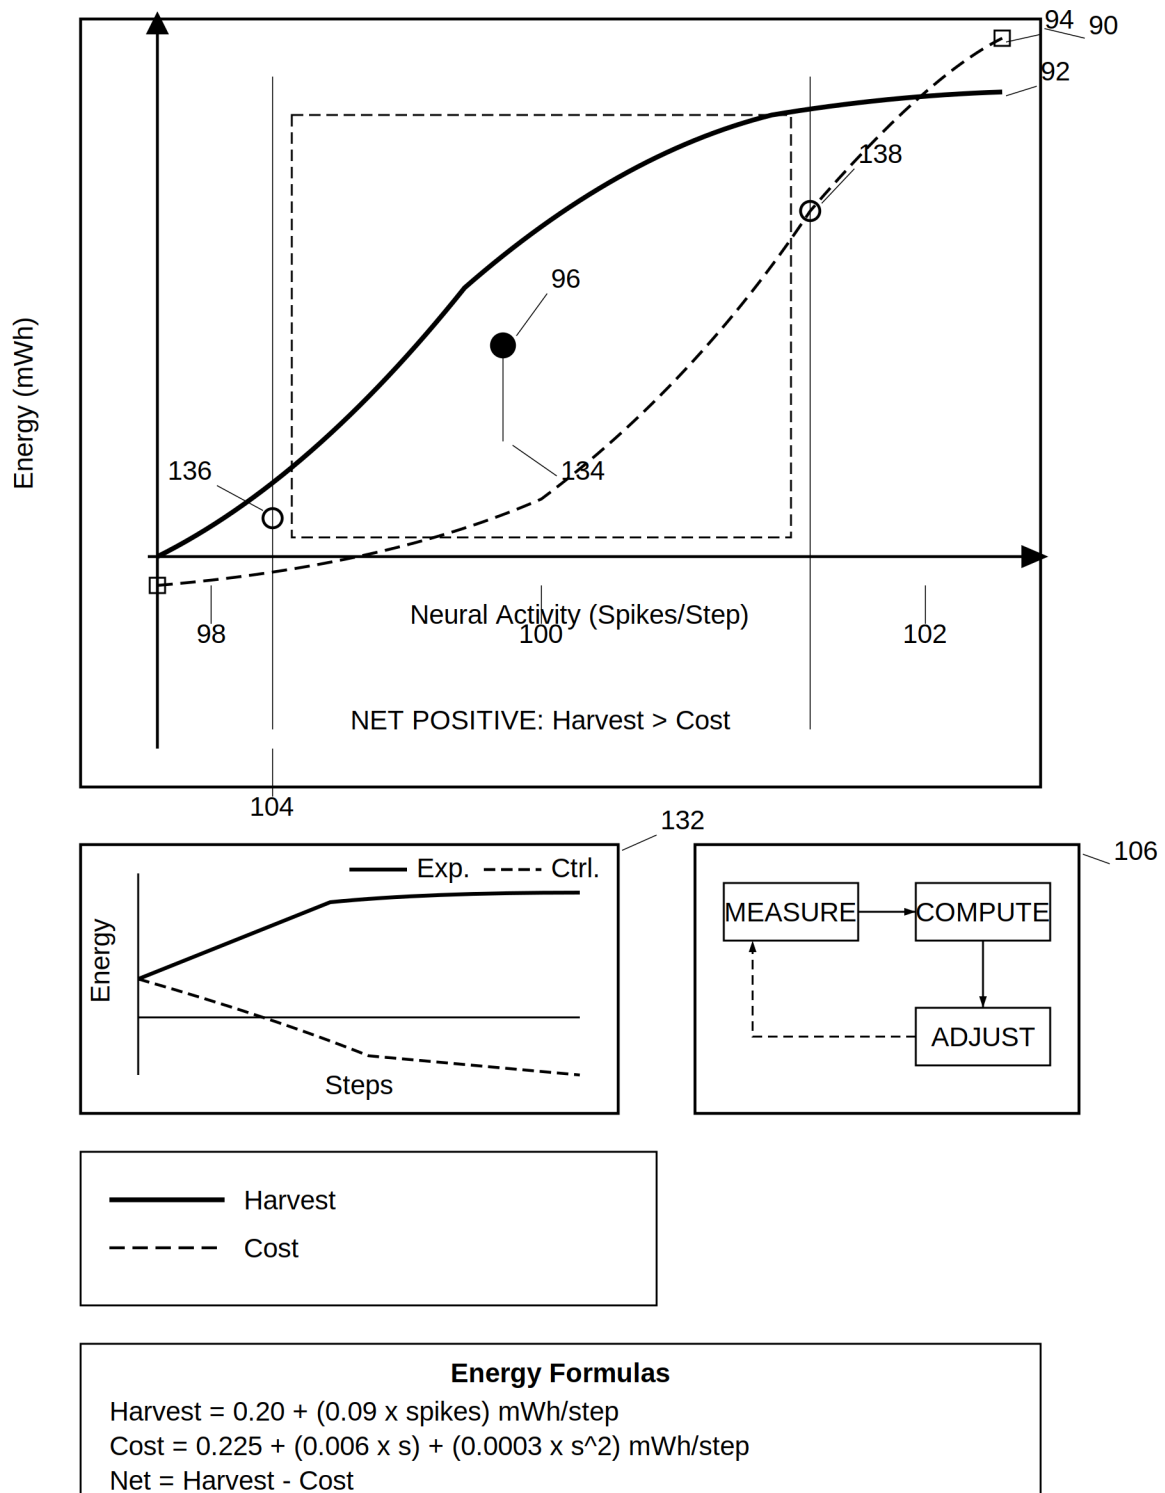


FIG. 5

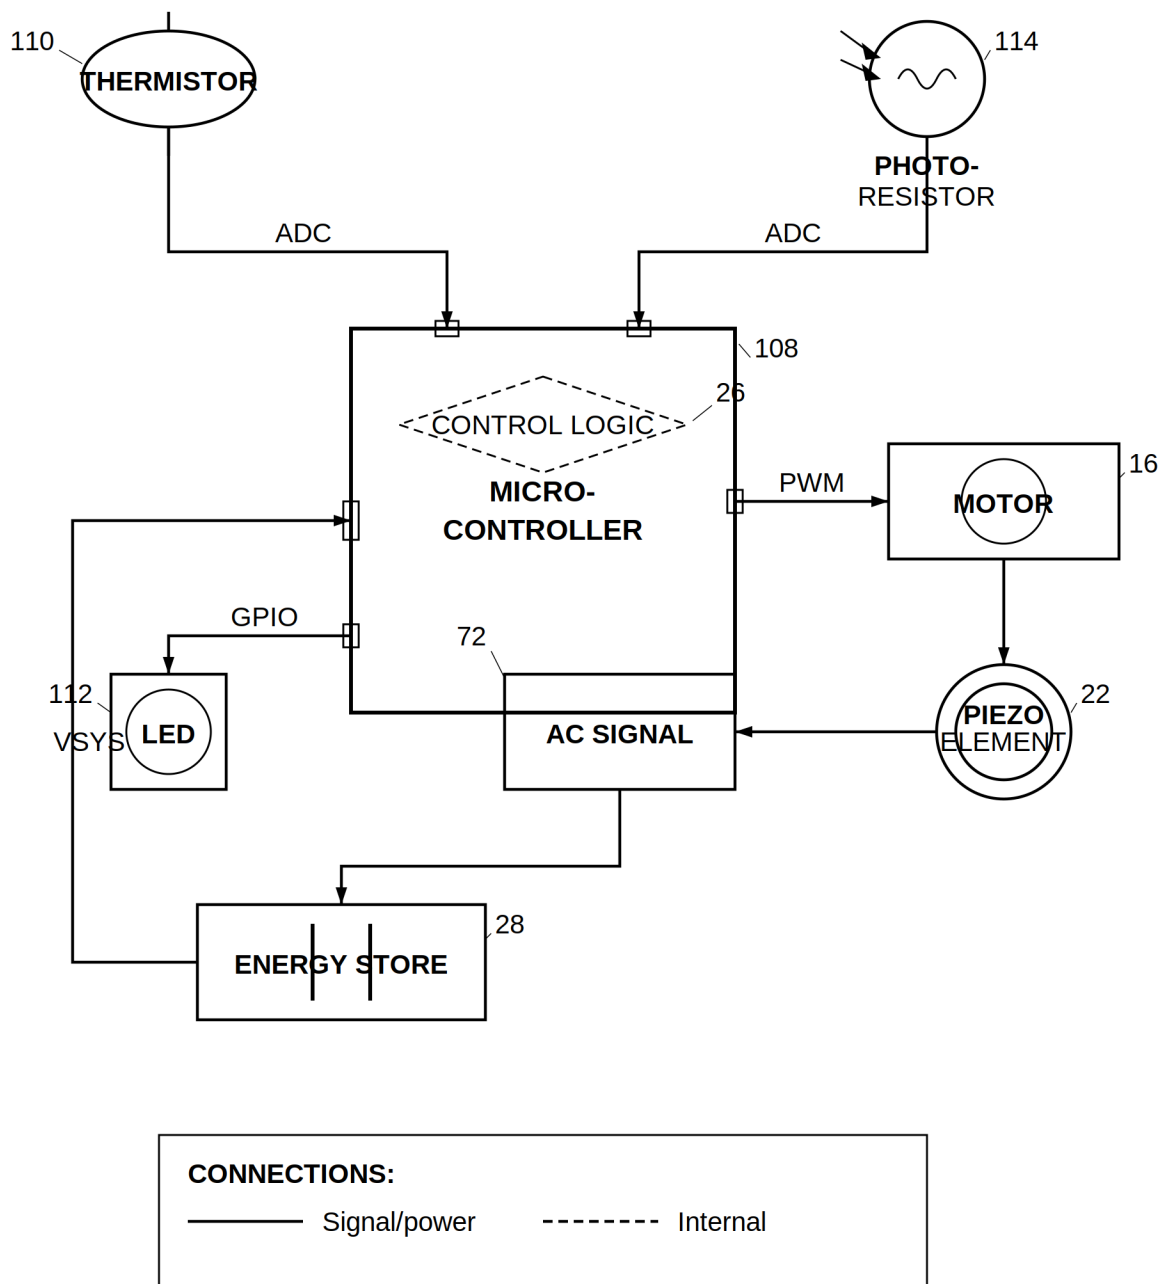


FIG. 6


116

Claim	Criterion	Measured	Threshold	Result
Phase 7 : Control Baseline				
A	Continuity	2000 pts	2000 pts	PASS
B	Boundedness	finite	finite	PASS
C	Robustness	std = 24.8	std <= 45	PASS
D	I/O gain	corr = 0.42	corr >= 0.2	PASS
E	Saturation	0.03	<= 0.20	PASS
Phase 8 : Synaptic Plasticity (STDP)				
F8.1	Weight entropy	0.94 bit drop	decrease	PASS
F8.2	STDP MI ratio	6.52x	> 1.20x	PASS
F8.3	Convergence	0.00%	< 10%	PASS
Phase 9 : Predictive Processing				
F9.1	Error reduction	63.9%	> 50%	PASS
F9.2	Random trend	p = 0.69	p > 0.05	PASS
F9.3	Adaptation	1.51x spike	> 1.3x + recover	PASS
Phase 10 : Multi-Modal Integration				
F10.1	Sync difference	0.70	> 0.20	PASS
F10.2	Weight entropy	2.31 to 0.0	decrease	PASS
F10.3	Convergence	0.18	< 0.20	PASS

118

Configuration	Energy at 2000 Steps	Status
Control (EnergyConfig)	-4,697 mWh	Depleted
Experimental (BalancedConfig)	100.0 mWh	Sustained


122

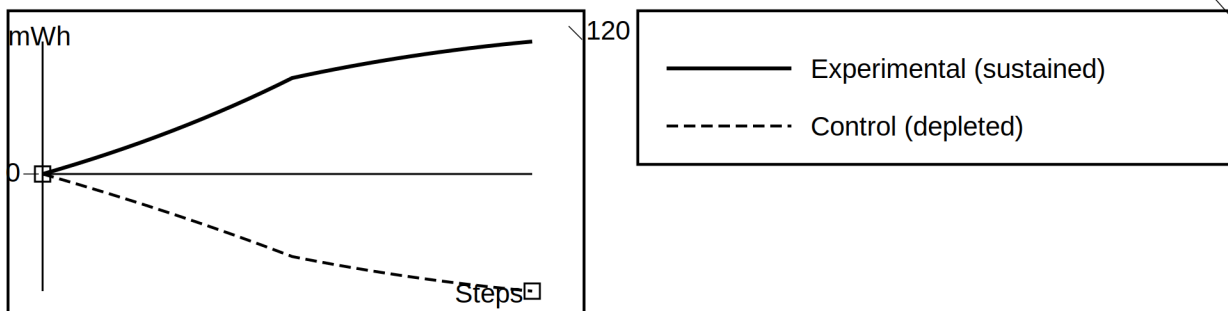

124

14 / 14 CLAIMS PASS : Phases 7 - 10 Validated

FIG. 7

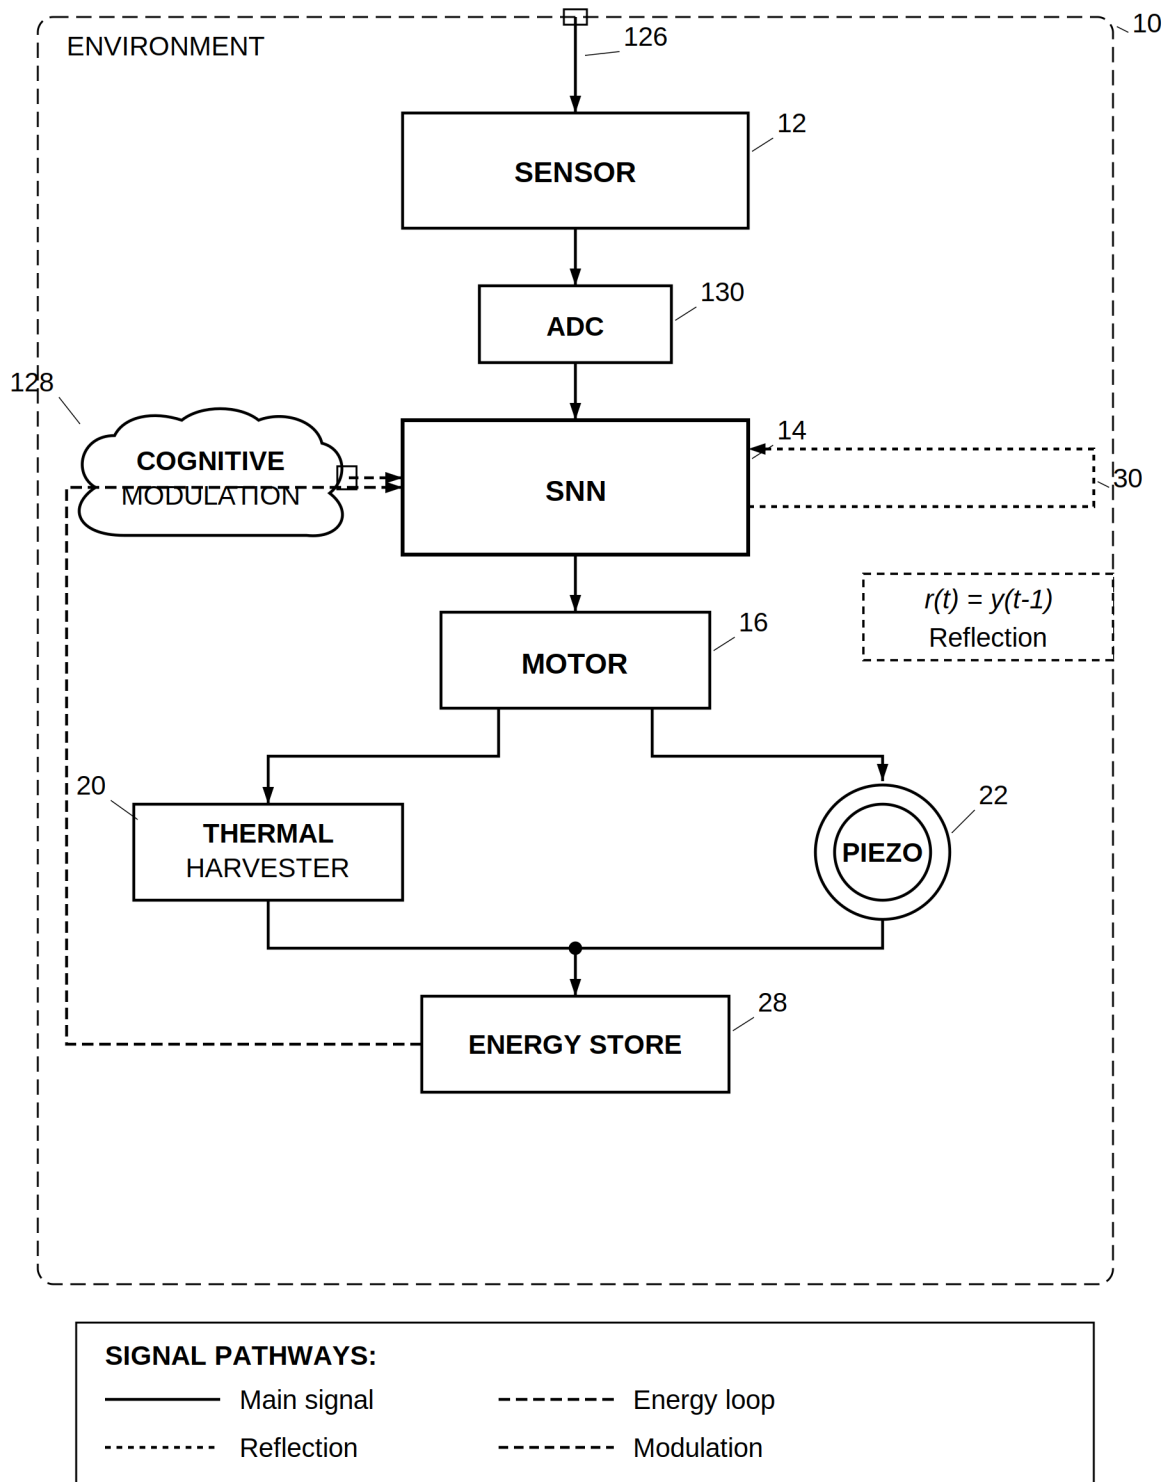**FIG. 8**