


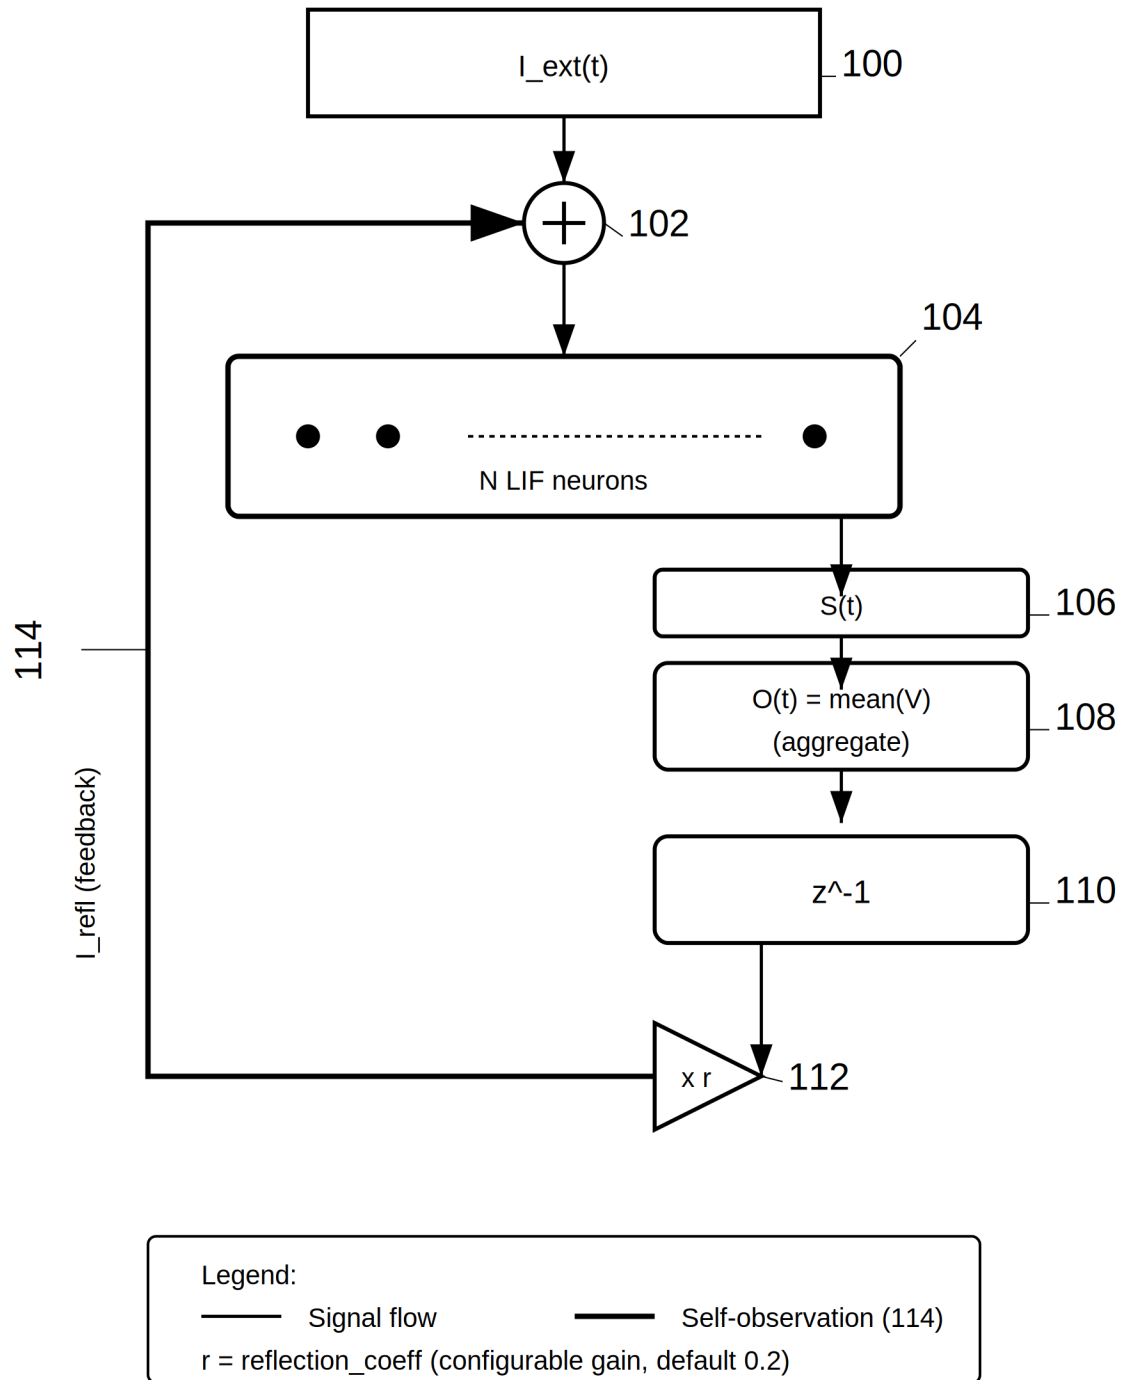


FIG. 1

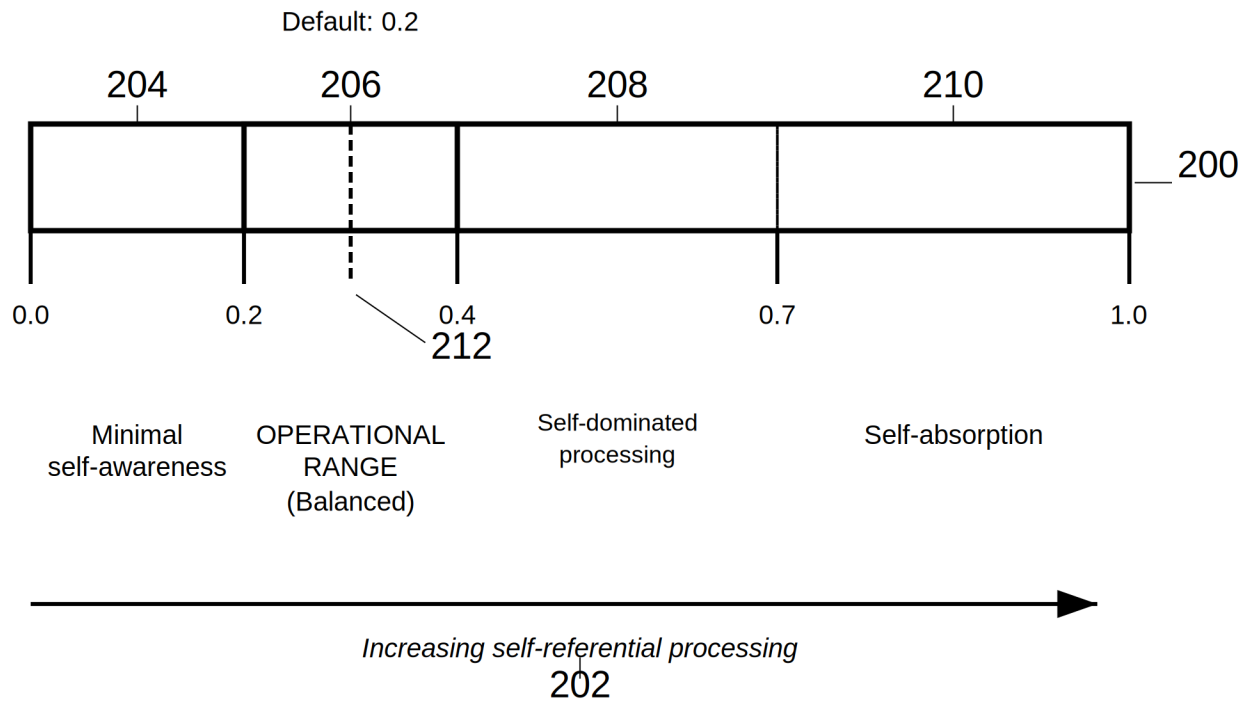

$\text{reflection_coeff} = \text{base_coeff} + \text{modulation} \times \text{sensitivity}$

Default: $\text{base_coeff} = 0.2$, $\text{sensitivity} = 0.1$

Range: 0.1 to 0.3 (within OPERATIONAL zone)

The reflection coefficient is the system's "self-awareness dial"

FIG. 2

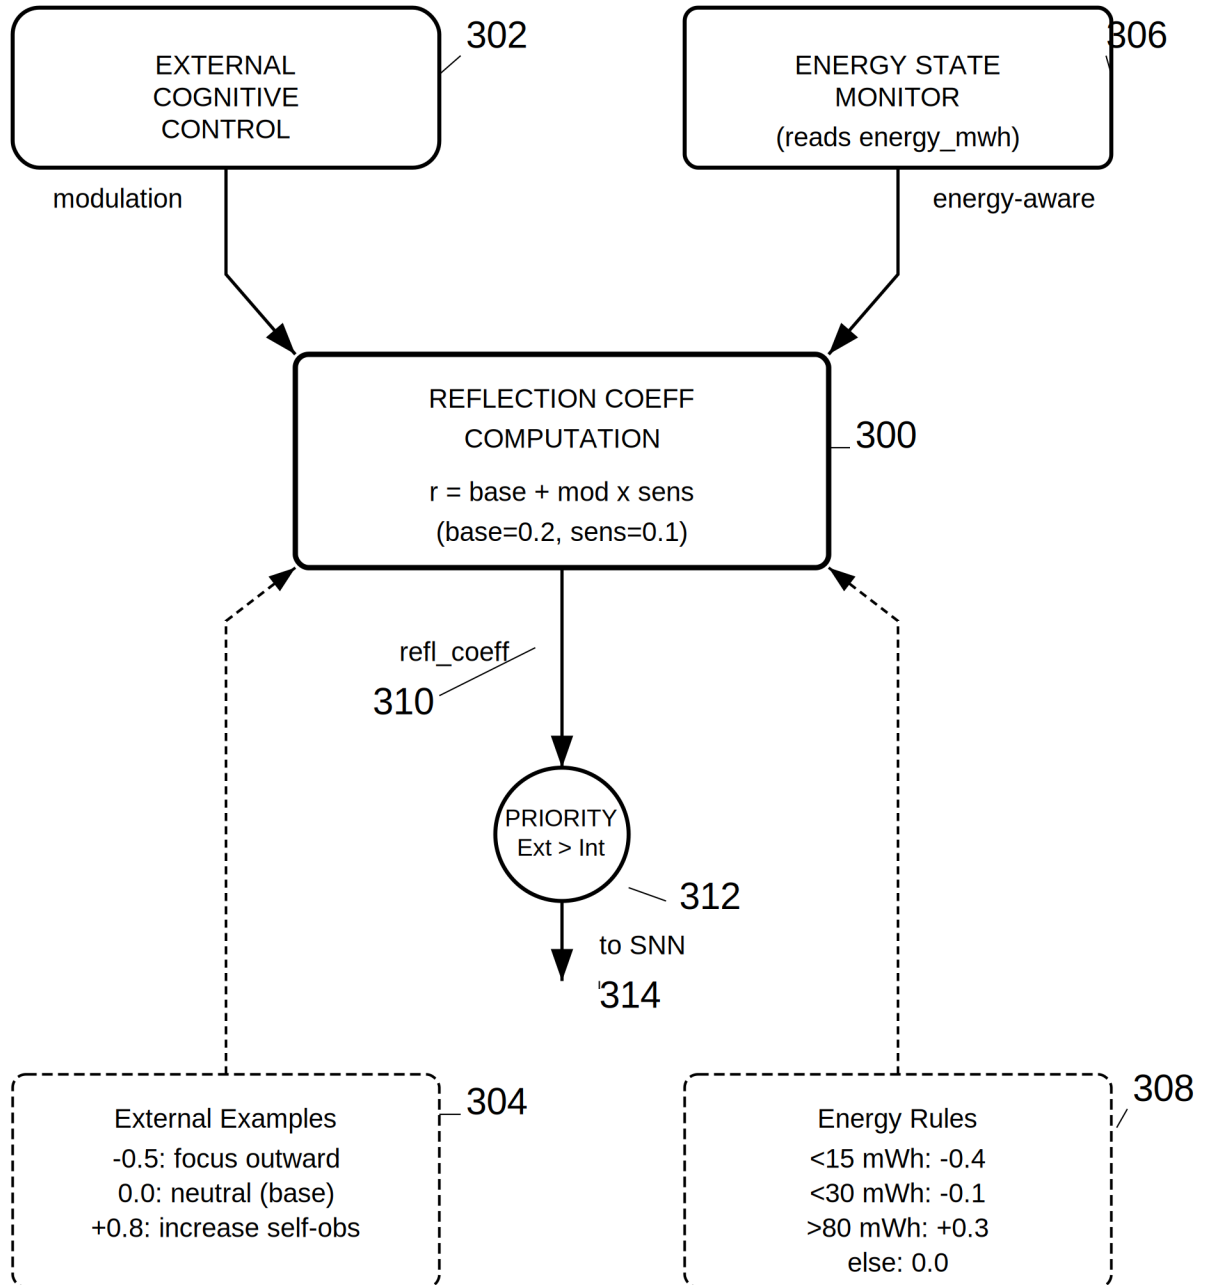


FIG. 3

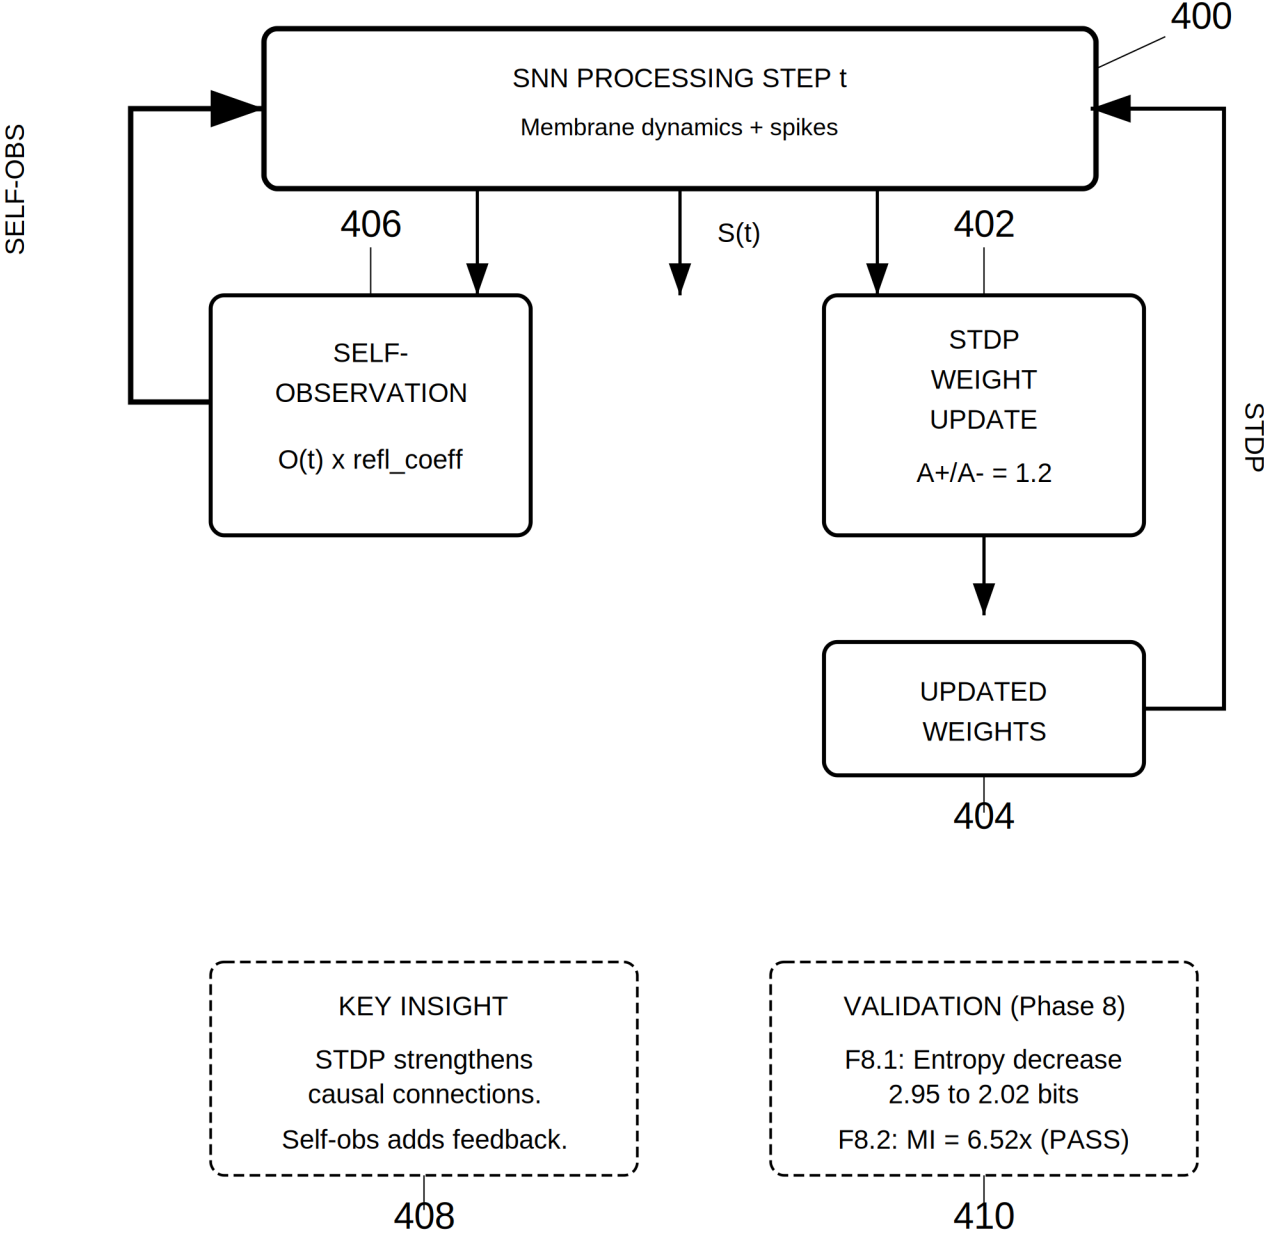


FIG. 4


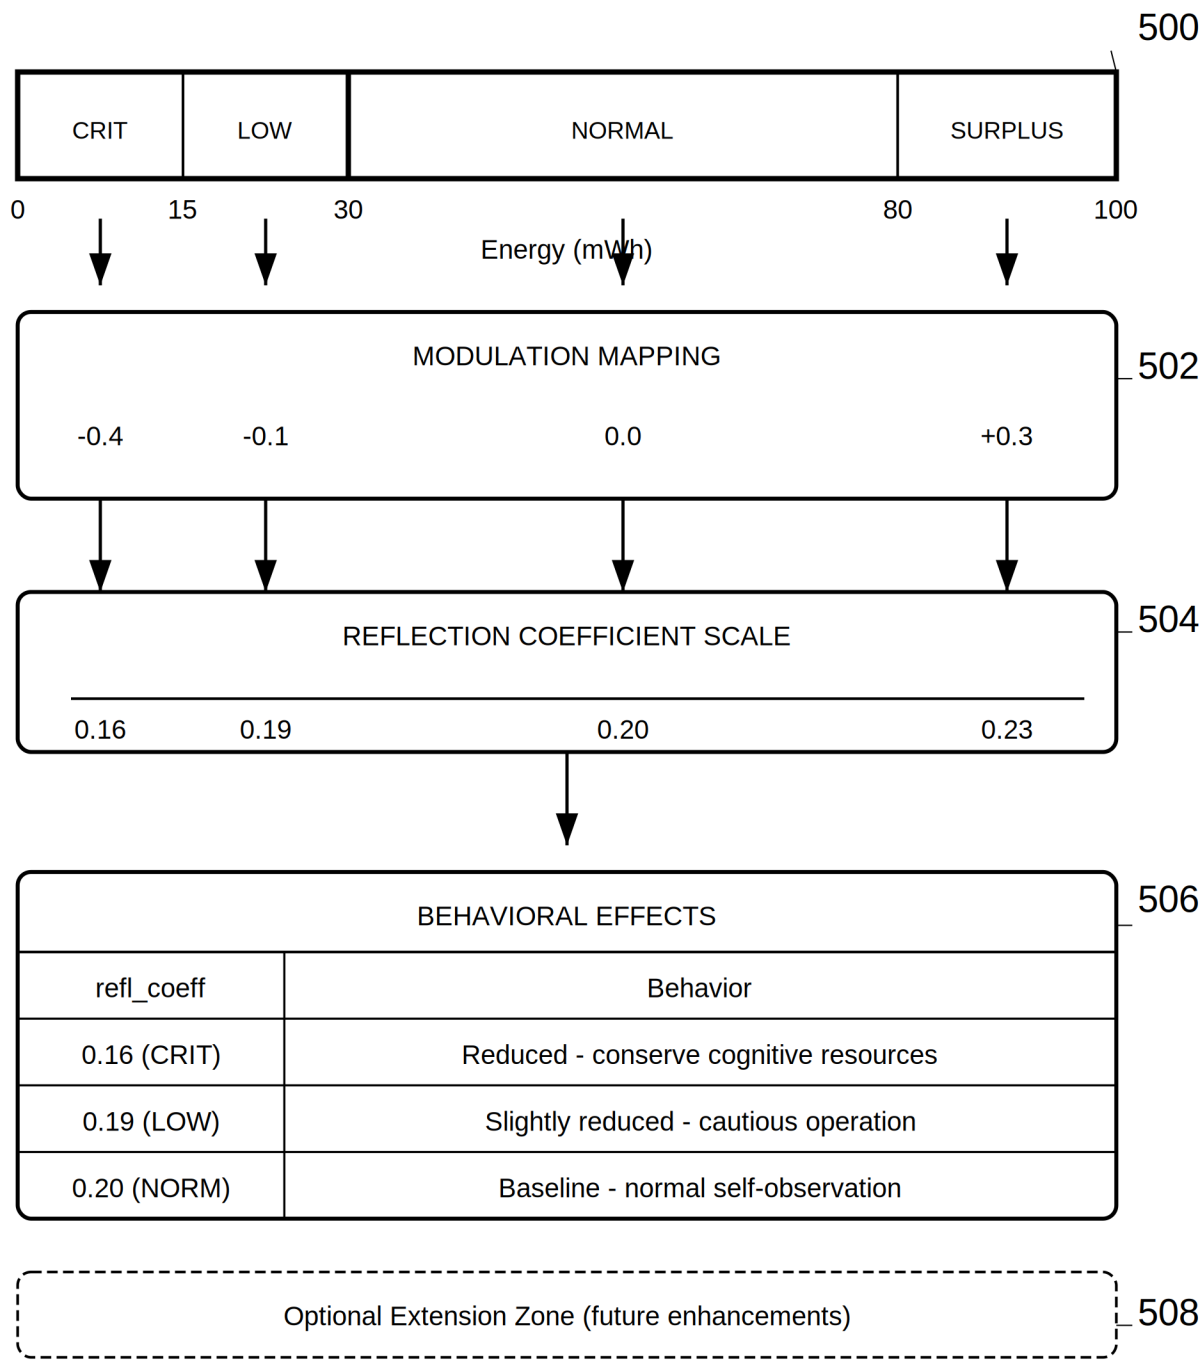


FIG. 5

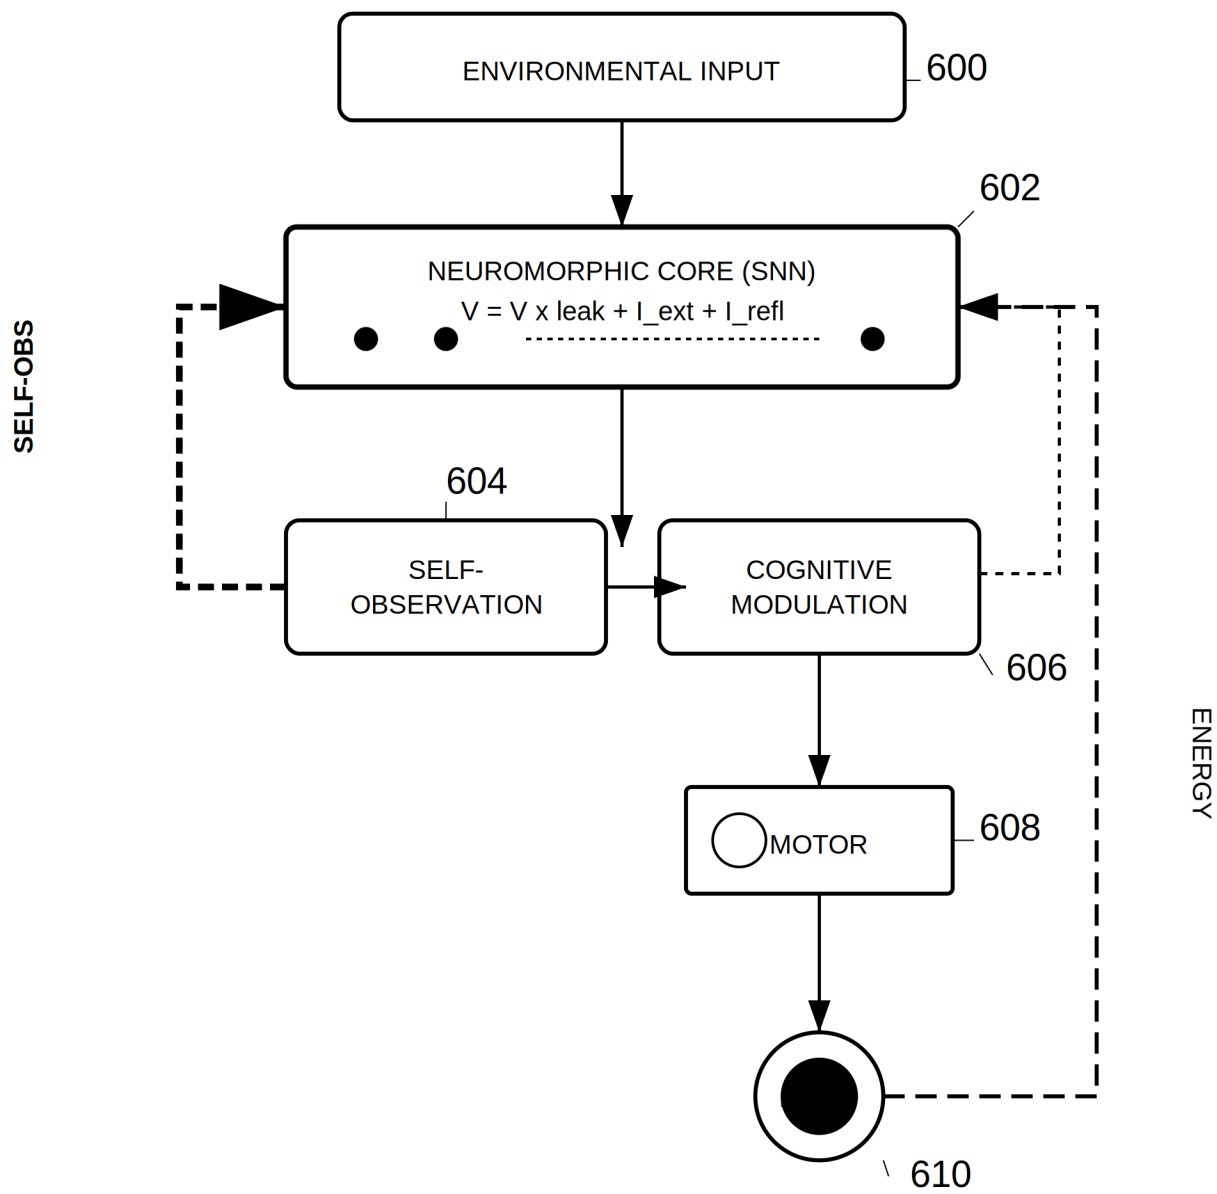

Legend:

- Self-Observation Loop (Patent B - THIS PATENT)
- - - - - Energy Feedback Loop (Patent A)

FIG. 6