Machine Translated by Google

ACCEPTANCE DETAILS

Microcircuits 140UD1AVK, 140UD101AVK, 140UD1BVK, 140UD101BVK comply with the technical specifications of AEYAR.431130.171-01 TU; OSM140UD1AVK, OSM140UD1BVK, OSM140UD101AVK, OSM140UD101BVK comply with the technical specifications of AEYAR.431130.171-01 TU and PO.070.052, microcircuits are considered fit for operation.

Accepted by notification No. _____ dated _____
Date

Quality Control Stamp

Customer representative stamp

Recheck performed_____
Date

Accepted by notification No. _____ dated _____
Date

Quality Control Stamp

Customer representative stamp

OPERATING INSTRUCTIONS

"WARNING - Observe safety precautions when working - "STATIC ELECTRICITY SENSITIVE DEVICES".

The permissible value of static potential is 100 V.

Microcircuits

OSM140UD1AVK, 140UD1AVK, OSM140UD1BVK, 140UD1BVK, OSM140UD101AVK, 140UD101AVK, OSM140UD101BVK, 140UD101BVK

OKP code : 6331315175 – OSM140UD1A VK, 140UD1A VK
6331315195 – OSM140UD101A VK, 140UD101A VK
6331315185 - OSM140UD1B VK, 140UD1B VK
6331315205 – OSM140UD101B VK, 140UD101B VK


LABEL

LSAR.431130.011 ET

Integrated circuits OSM140UD1AVK, 140UD1AVK, OSM140UD1BVK, 140UD1BVK, OSM140UD101AVK, 140UD101AVK, OSM140UD101BVK, 140UD101BVK – operational amplifiers.

The code code for marking microcircuits 140UD1AVK - UD1A, 140UD1BVK - UD1B, 140UD101AVK - UD101A, 140UD101BVK - UD101B in accordance with AEYaR.431130.171 TU; OSM140UD1AVK-OSMUD1A, OSM140UD1BVK-OSMUD1B, OSM140UD101AVK - OSMUD101A, ÿÿÿ140ÿÿ101ÿÿÿ - ÿÿÿÿÿ101ÿ in accordance with ÿÿÿÿ.431130.171 ÿÿ and PO.070.052.

Pinout diagram

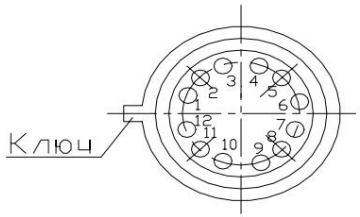

The numbering of the terminals is shown conditionally.
The key shows the starting point of the pin count.
Weight no more than 1.5 g.

Pin assignment table

Output designation	Purpose of the output
1	Supply voltage minus Ucc
2,3,12	Control
4	General Exit
5	Free
6	Supply voltage Ucc
7	Free
8,11 9 10	Inverting input The input is non-inverting

Machine Translated by Google

MAIN ELECTRICAL PARAMETERS

at a temperature of (25 ± 5)º C

Name parameter, unit measurements, mode measurements	Beech-vein-noe wagon-first-nie	Norm			
		OSM140UD1AVK, 140UD1AVK, OSM140UD101AVK, 140UD101AVK		OSM140UD1BVK, 140UD1BVK, OSM140UD101BVK, 140UD101BVK	
		Not less	Not more	Not less	Not more
Maximum weekend voltage, V, at: UI = ±100 mV	U o max	3.5	-3.0	8.0	-6.3
Voltage zero offset, mV	UIo	-7.0	7.0	-7.0	7.0
Input current, ÿA	II	-5.0	5.0	-8.0	8.0
Input difference currents, ÿA	IIO	-1.5	1.5	-1.5	1.5
Current consumption, mA, at: U o = 0; Ucc = ±6.9 V at: U o = 0; Ucc = ±13.9 V	Icc	-6.0 -	6.0 -	- -12.0	- 12.0
Coefficient voltage gain A U		900	4000	2000	10500

Other measurement modes –
for OSM140UD1AVK, 140UD1AVK, OSM140UD101AVK, 140UD101 A VK
at: Ucc = ± 6.3 V; RL = 5.05 kOhm
for OSM140UD1BVK, 140UD1BVK, OSM140UD101BVK, 140UD101 B VK
at: Ucc = ± 12.6 V; RL = 5.05 kOhm

Precious metal content in 1000 microcircuits:
-gold

Does not contain non-ferrous metals.

RELIABILITY

Minimum operating time (MOT) of microcircuits in modes and conditions permitted by the technical specifications - 100,000 hours, and in lighter conditions modes at: Ucc=±(6.3±0.1) V; RL=5.05 k Ohm for OSM140UD1AVK, 140UD1AVK, OSM140UD101AVK, 140UD101AVK, and for OSM140UD1BVK, 140UD1BVK, OSM140UD101BVK, 140UD101BVK at: Ucc=±(12.6±0.2) V; RL=5.05 k Ohm – 120000 h.

Gamma-percentage resource (Tr ÿ) of microcircuits at ÿ = 95% 200,000 h

Minimum shelf life of microcircuits (Tcm) at their storage: - in a heated storage facility or in a storage facility with humidity and temperature controlled or places storage of microcircuits embedded in a protected equipment, or located in a protected set Spare parts kit - 25 years; - in unheated storage - 16.5 years; - under a canopy and in an open area, mounted in equipment (as part of an unprotected facility), or in spare parts kit – 12.5 years. Shelf life is calculated from the date of manufacture indicated on the microcircuit. **MANUFACTURER'S WARRANTY**

The manufacturer guarantees the conformity of the supplied microcircuits meet all the requirements of AEIR.431130.171-01 TU, and microcircuits with the index "OCM" - AEYaR.431130.171-01 TU and PO.070.052, during the shelf life and minimum developments within the shelf life subject to compliance consumer of operating modes and conditions, rules storage and operation, as well as the instructions for use established by the technical specifications.

The warranty period begins on the date of manufacture, applied to the microcircuit.