


配置核查报告

任务名称	gui-task	设备类型	交换机
设备品牌	华为	检查项数量	23
配置文件	C:\Users\O\Desktop\安全基线排查工具\C onfigChecker\config_file\Network\huawei.txt	生成时间	2026-07-08 10:57:15

结果汇总

状态	数量
需复核	23

风险统计图

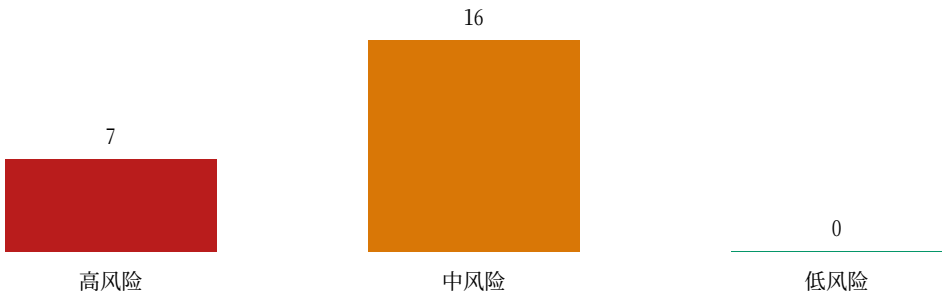

检查项明细

检查项	风险	状态	证据	整改建议
HUA-NET-001 SSH与Telnet	高风险	需复核	L5: info-center loghost source Vlanif701 L6: info-center loghost 192.168.42.151 facility local5 L12: undo telnet server enable L14: undo http server enable L15: undo http secure-server enable L17: undo nap slave enable L52: acl number 2000 L62: acl number 2100	对照基线判定标准逐项确认当前值、范围、例外和留存记录。
HUA-NET-002 AAA与本地用户	高风险	需复核	L5: info-center loghost source Vlanif701 L6: info-center loghost 192.168.42.151 facility local5 L12: undo telnet server enable L17: undo nap slave enable L52: acl number 2000 L62: acl number 2100 L63: description Limit_access_SNMP_Service L68: acl number 3000	对照基线判定标准逐项确认当前值、范围、例外和留存记录。
HUA-NET-003 日志与NTP	中风险	需复核	L5: info-center loghost source Vlanif701 L6: info-center loghost 192.168.42.151 facility local5 L12: undo telnet server enable L17: undo nap slave enable L52: acl number 2000 L62: acl number 2100 L63: description Limit_access_SNMP_Service L68: acl number 3000	对照基线判定标准逐项确认当前值、范围、例外和留存记录。
SSH管理安全	高风险	需复核	L5: info-center loghost source Vlanif701 L6: info-center loghost 192.168.42.151 facility local5 L12: undo telnet server enable L14: undo http server enable L15: undo http secure-server enable L17: undo nap slave enable L52: acl number 2000 L62: acl number 2100	对照基线判定标准逐项确认当前值、范围、例外和留存记录。

检查项	风险	状态	证据	整改建议
VRP-AAA口令	高风险	需复核	L5: info-center loghost source Vlanif701 L6: info-center loghost 192.168.42.151 facility local5 L12: undo telnet server enable L17: undo nap slave enable L52: acl number 2000 L62: acl number 2100 L63: description Limit_access_SNMP_Service L68: acl number 3000	对照基线判定标准逐项确认当前值、范围、例外和留存记录。
VRP-SNMPv3	中风险	需复核	L5: info-center loghost source Vlanif701 L6: info-center loghost 192.168.42.151 facility local5 L12: undo telnet server enable L17: undo nap slave enable L52: acl number 2000 L62: acl number 2100 L63: description Limit_access_SNMP_Service L68: acl number 3000	对照基线判定标准逐项确认当前值、范围、例外和留存记录。
VRP-SSH与Telnet	中风险	需复核	L5: info-center loghost source Vlanif701 L6: info-center loghost 192.168.42.151 facility local5 L12: undo telnet server enable L17: undo nap slave enable L52: acl number 2000 L62: acl number 2100 L63: description Limit_access_SNMP_Service L68: acl number 3000	对照基线判定标准逐项确认当前值、范围、例外和留存记录。
VRP-VTY-ACL	中风险	需复核	L5: info-center loghost source Vlanif701 L6: info-center loghost 192.168.42.151 facility local5 L12: undo telnet server enable L17: undo nap slave enable L52: acl number 2000 L62: acl number 2100 L63: description Limit_access_SNMP_Service L68: acl number 3000	对照基线判定标准逐项确认当前值、范围、例外和留存记录。
VRP-日志NTP	中风险	需复核	L5: info-center loghost source Vlanif701 L6: info-center loghost 192.168.42.151 facility local5 L12: undo telnet server enable L17: undo nap slave enable L52: acl number 2000 L62: acl number 2100 L63: description Limit_access_SNMP_Service L68: acl number 3000	对照基线判定标准逐项确认当前值、范围、例外和留存记录。
日志与时间同步	中风险	需复核	L5: info-center loghost source Vlanif701 L6: info-center loghost 192.168.42.151 facility local5 L12: undo telnet server enable L17: undo nap slave enable L52: acl number 2000 L62: acl number 2100 L63: description Limit_access_SNMP_Service L68: acl number 3000	对照基线判定标准逐项确认当前值、范围、例外和留存记录。
交换机VLAN配置	中风险	需复核	L5: info-center loghost source Vlanif701 L6: info-center loghost 192.168.42.151 facility local5 L10: vlan batch 200 241 to 242 701 L12: undo telnet server enable L17: undo nap slave enable L52: acl number 2000 L62: acl number 2100 L63: description Limit_access_SNMP_Service	对照基线判定标准逐项确认当前值、范围、例外和留存记录。
交换机日志审计	中风险	需复核	L5: info-center loghost source Vlanif701 L6: info-center loghost 192.168.42.151 facility local5 L12: undo telnet server enable L17: undo nap slave enable L52: acl number 2000 L62: acl number 2100 L63: description Limit_access_SNMP_Service L68: acl number 3000	对照基线判定标准逐项确认当前值、范围、例外和留存记录。
交换机端口安全	中风险	需复核	L5: info-center loghost source Vlanif701 L6: info-center loghost 192.168.42.151 facility local5 L12: undo telnet server enable L17: undo nap slave enable L52: acl number 2000 L62: acl number 2100 L63: description Limit_access_SNMP_Service L68: acl number 3000	对照基线判定标准逐项确认当前值、范围、例外和留存记录。

检查项	风险	状态	证据	整改建议
交换机管理安全	高风险	需复核	L5: info-center loghost source Vlanif701 L6: info-center loghost 192.168.42.151 facility local5 L12: undo telnet server enable L17: undo nap slave enable L52: acl number 2000 L62: acl number 2100 L63: description Limit_access_SNMP_Service L68: acl number 3000	对照基线判定标准逐项确认当前值、范围、例外和留存记录。
入侵防范-SNMP安全	中风险	需复核	L5: info-center loghost source Vlanif701 L6: info-center loghost 192.168.42.151 facility local5 L12: undo telnet server enable L17: undo nap slave enable L52: acl number 2000 L62: acl number 2100 L63: description Limit_access_SNMP_Service L68: acl number 3000	对照基线判定标准逐项确认当前值、范围、例外和留存记录。
入侵防范-关闭高危服务	中风险	需复核	L5: info-center loghost source Vlanif701 L6: info-center loghost 192.168.42.151 facility local5 L12: undo telnet server enable L14: undo http server enable L15: undo http secure-server enable L17: undo nap slave enable L52: acl number 2000 L62: acl number 2100	对照基线判定标准逐项确认当前值、范围、例外和留存记录。
入侵防范-端口安全	中风险	需复核	L5: info-center loghost source Vlanif701 L6: info-center loghost 192.168.42.151 facility local5 L8: ipv6 L12: undo telnet server enable L17: undo nap slave enable L21: user-bind static ip-address 192.168.37.130 mac-address 6c0b-84de-4b59 interface GigabitEthernet0/0/36 L22: user-bind static ip-address 192.168.37.133 mac-address 6c0b-84de-4d07 interface GigabitEthernet0/0/20 L23: user-bind static ip-address 192.168.37.143 mac-address 6c0b-849a-3669 interface GigabitEthernet0/0/42	对照基线判定标准逐项确认当前值、范围、例外和留存记录。
安全审计-日志服务器	中风险	需复核	L5: info-center loghost source Vlanif701 L6: info-center loghost 192.168.42.151 facility local5 L12: undo telnet server enable L17: undo nap slave enable L52: acl number 2000 L62: acl number 2100 L63: description Limit_access_SNMP_Service L68: acl number 3000	对照基线判定标准逐项确认当前值、范围、例外和留存记录。
网络架构-VLAN隔离	中风险	需复核	L5: info-center loghost source Vlanif701 L6: info-center loghost 192.168.42.151 facility local5 L10: vlan batch 200 241 to 242 701 L12: undo telnet server enable L17: undo nap slave enable L52: acl number 2000 L62: acl number 2100 L63: description Limit_access_SNMP_Service	对照基线判定标准逐项确认当前值、范围、例外和留存记录。
访问控制-ACL最小化	中风险	需复核	L5: info-center loghost source Vlanif701 L6: info-center loghost 192.168.42.151 facility local5 L12: undo telnet server enable L17: undo nap slave enable L52: acl number 2000 L62: acl number 2100 L63: description Limit_access_SNMP_Service L68: acl number 3000	对照基线判定标准逐项确认当前值、范围、例外和留存记录。
身份鉴别-加密管理	高风险	需复核	L5: info-center loghost source Vlanif701 L6: info-center loghost 192.168.42.151 facility local5 L12: undo telnet server enable L17: undo nap slave enable L52: acl number 2000 L62: acl number 2100 L63: description Limit_access_SNMP_Service L68: acl number 3000	对照基线判定标准逐项确认当前值、范围、例外和留存记录。

检查项	风险	状态	证据	整改建议
身份鉴别-本地账户	高风险	需复核	L5: info-center loghost source Vlanif701 L6: info-center loghost 192.168.42.151 facility local5 L12: undo telnet server enable L17: undo nap slave enable L52: acl number 2000 L62: acl number 2100 L63: description Limit_access_SNMP_Service L68: acl number 3000	对照基线判定标准逐项确认当前值、范围、例外和留存记录。
身份鉴别-登录超时失败	中风险	需复核	L5: info-center loghost source Vlanif701 L6: info-center loghost 192.168.42.151 facility local5 L12: undo telnet server enable L17: undo nap slave enable L52: acl number 2000 L62: acl number 2100 L63: description Limit_access_SNMP_Service L68: acl number 3000	对照基线判定标准逐项确认当前值、范围、例外和留存记录。