



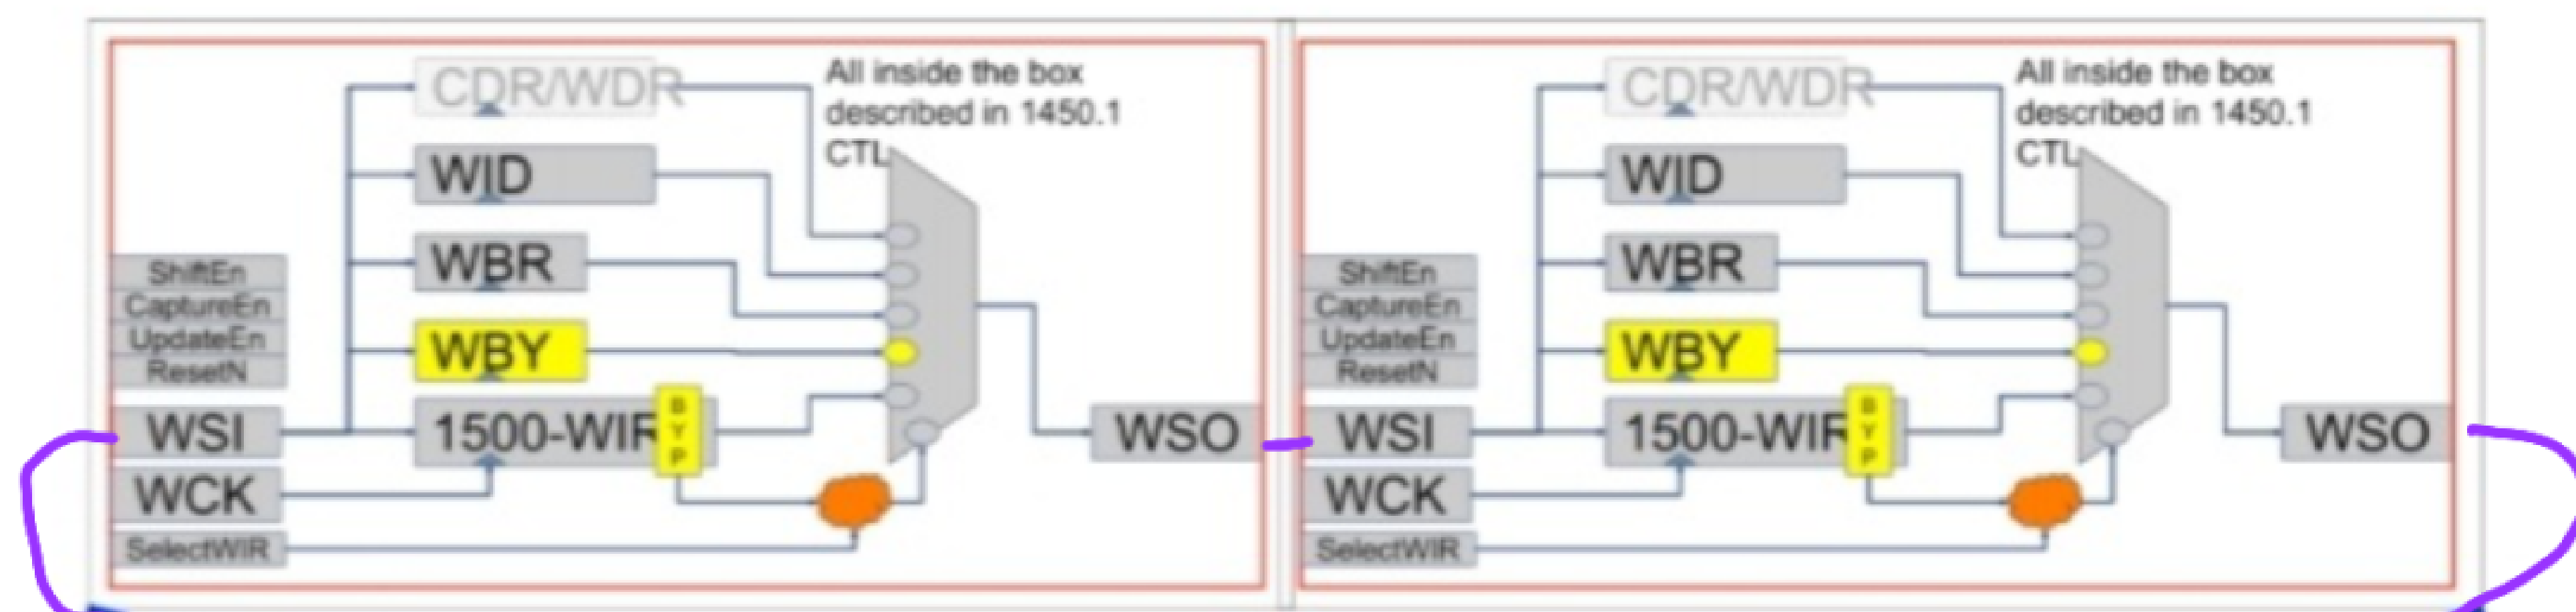


Daisy-Chained 1500 Wrappers

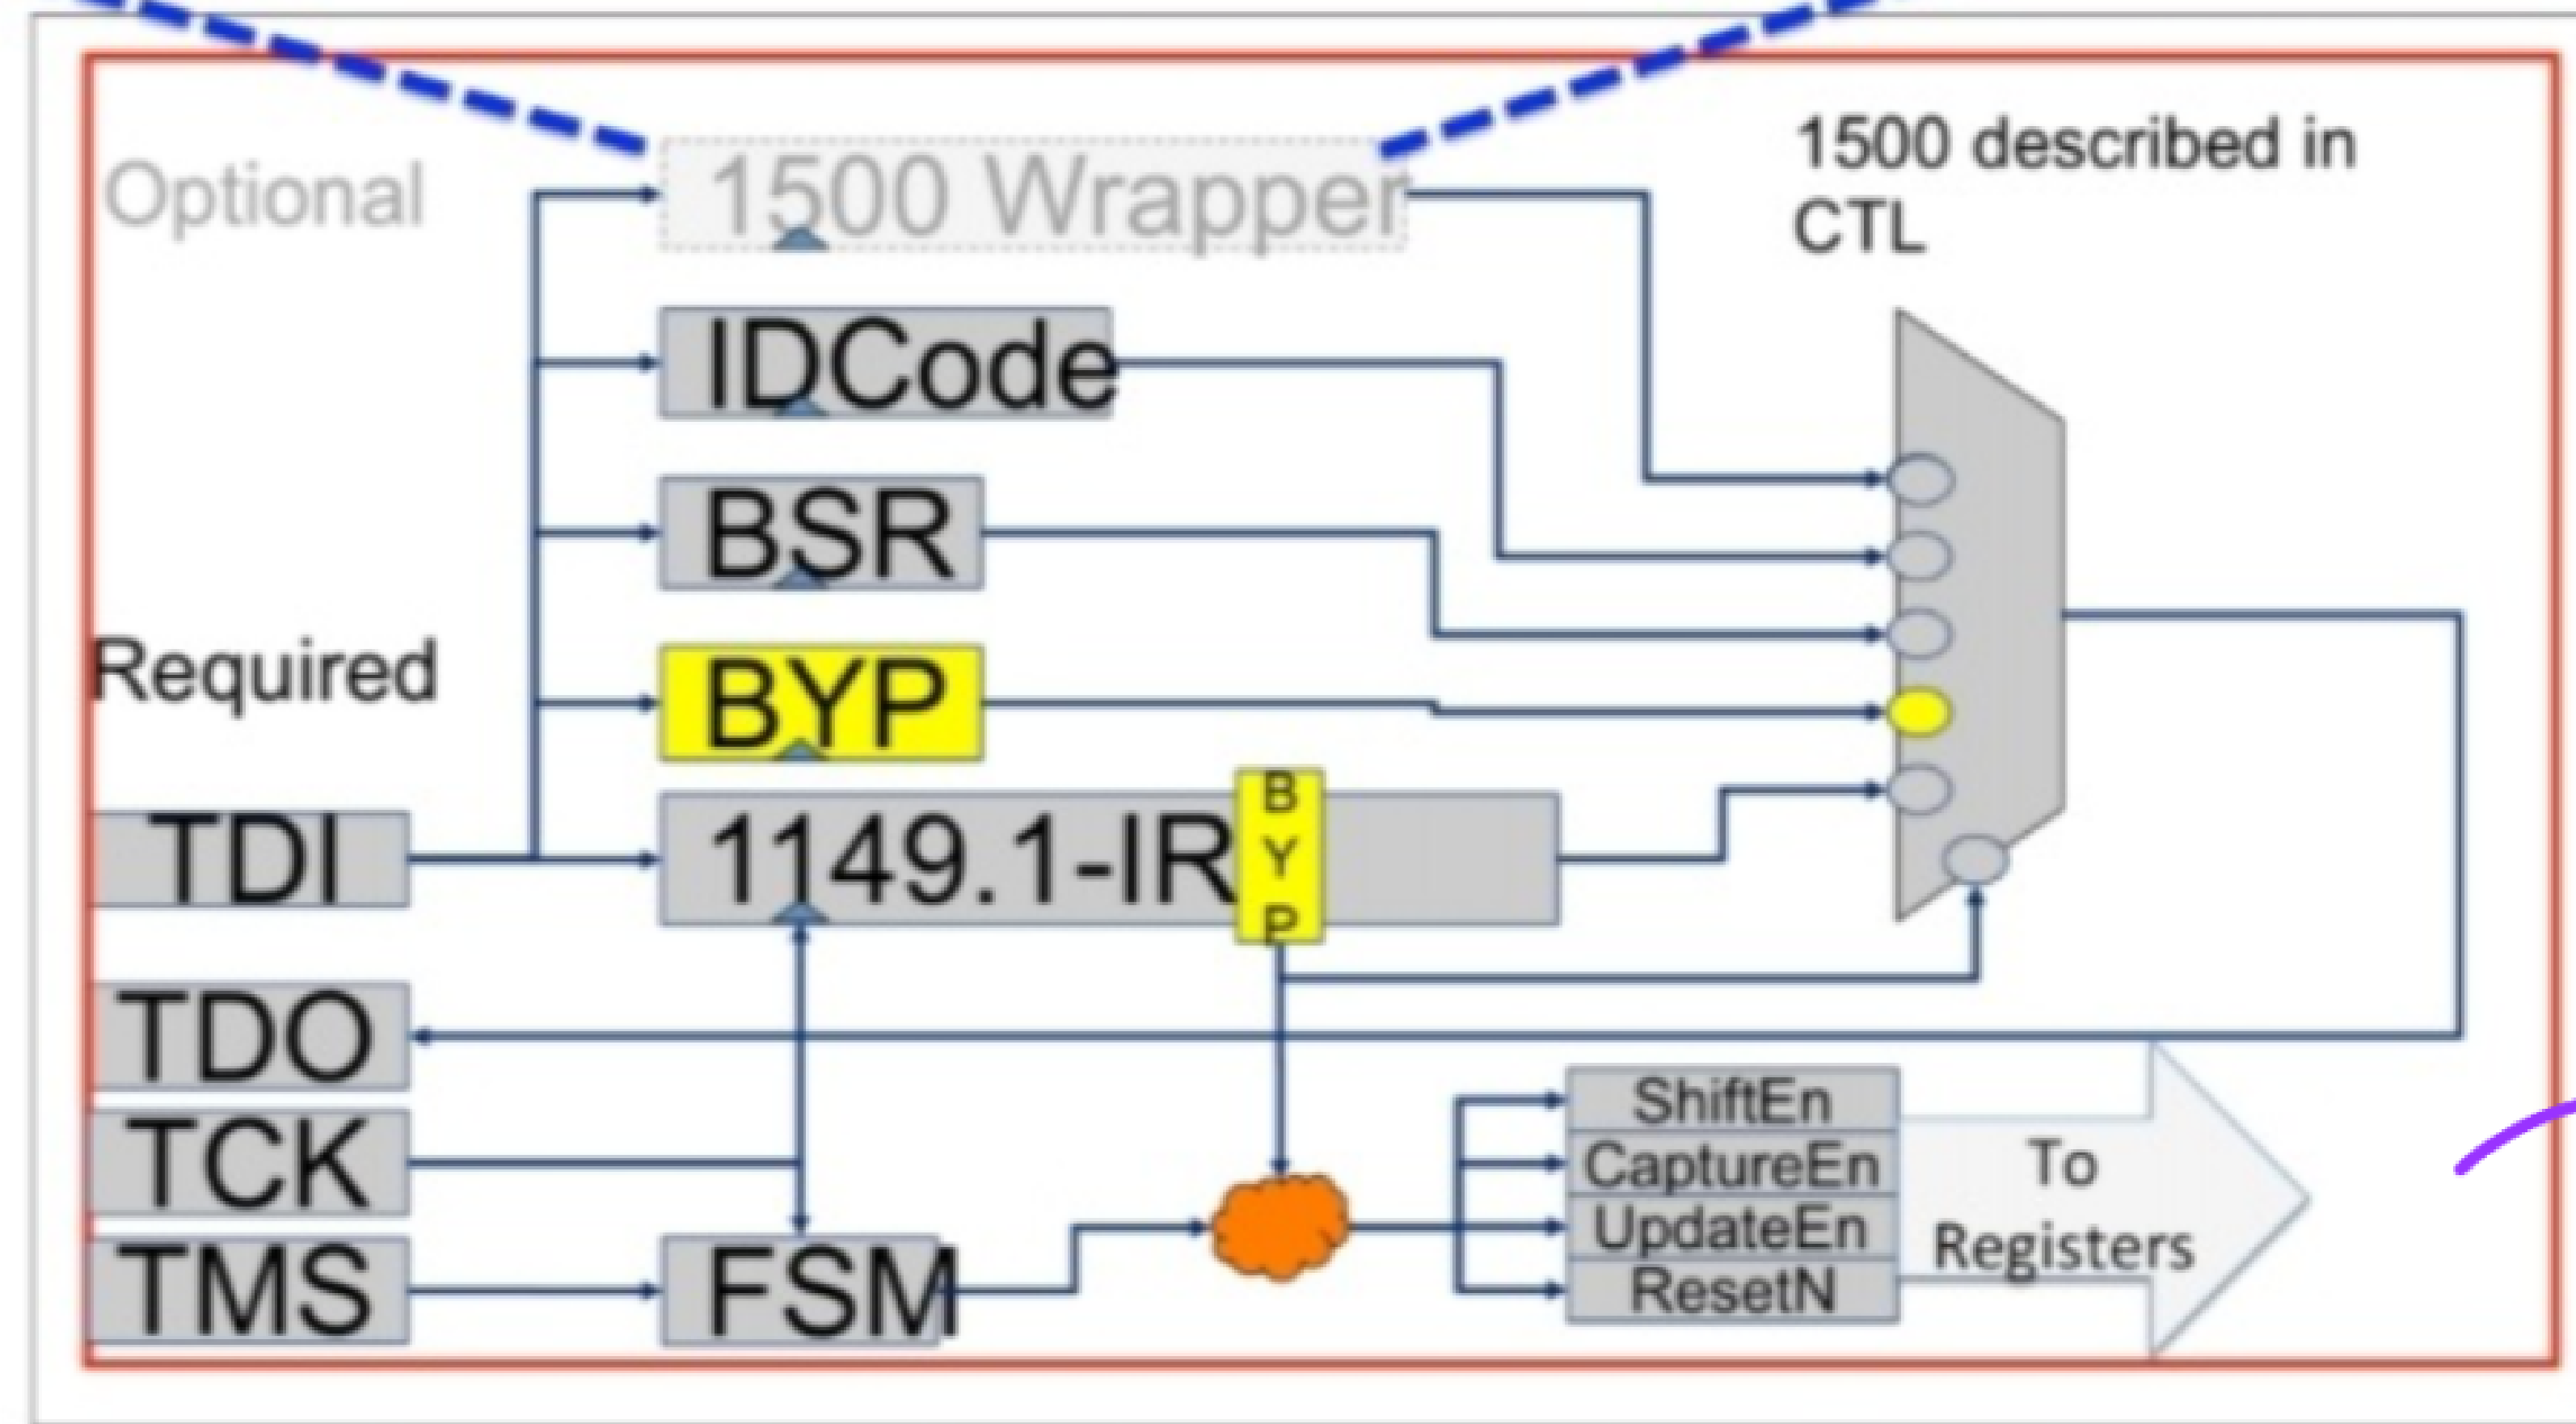

→ IEEE 1149.1 TAP^{std}

IEEE 1149.1 std

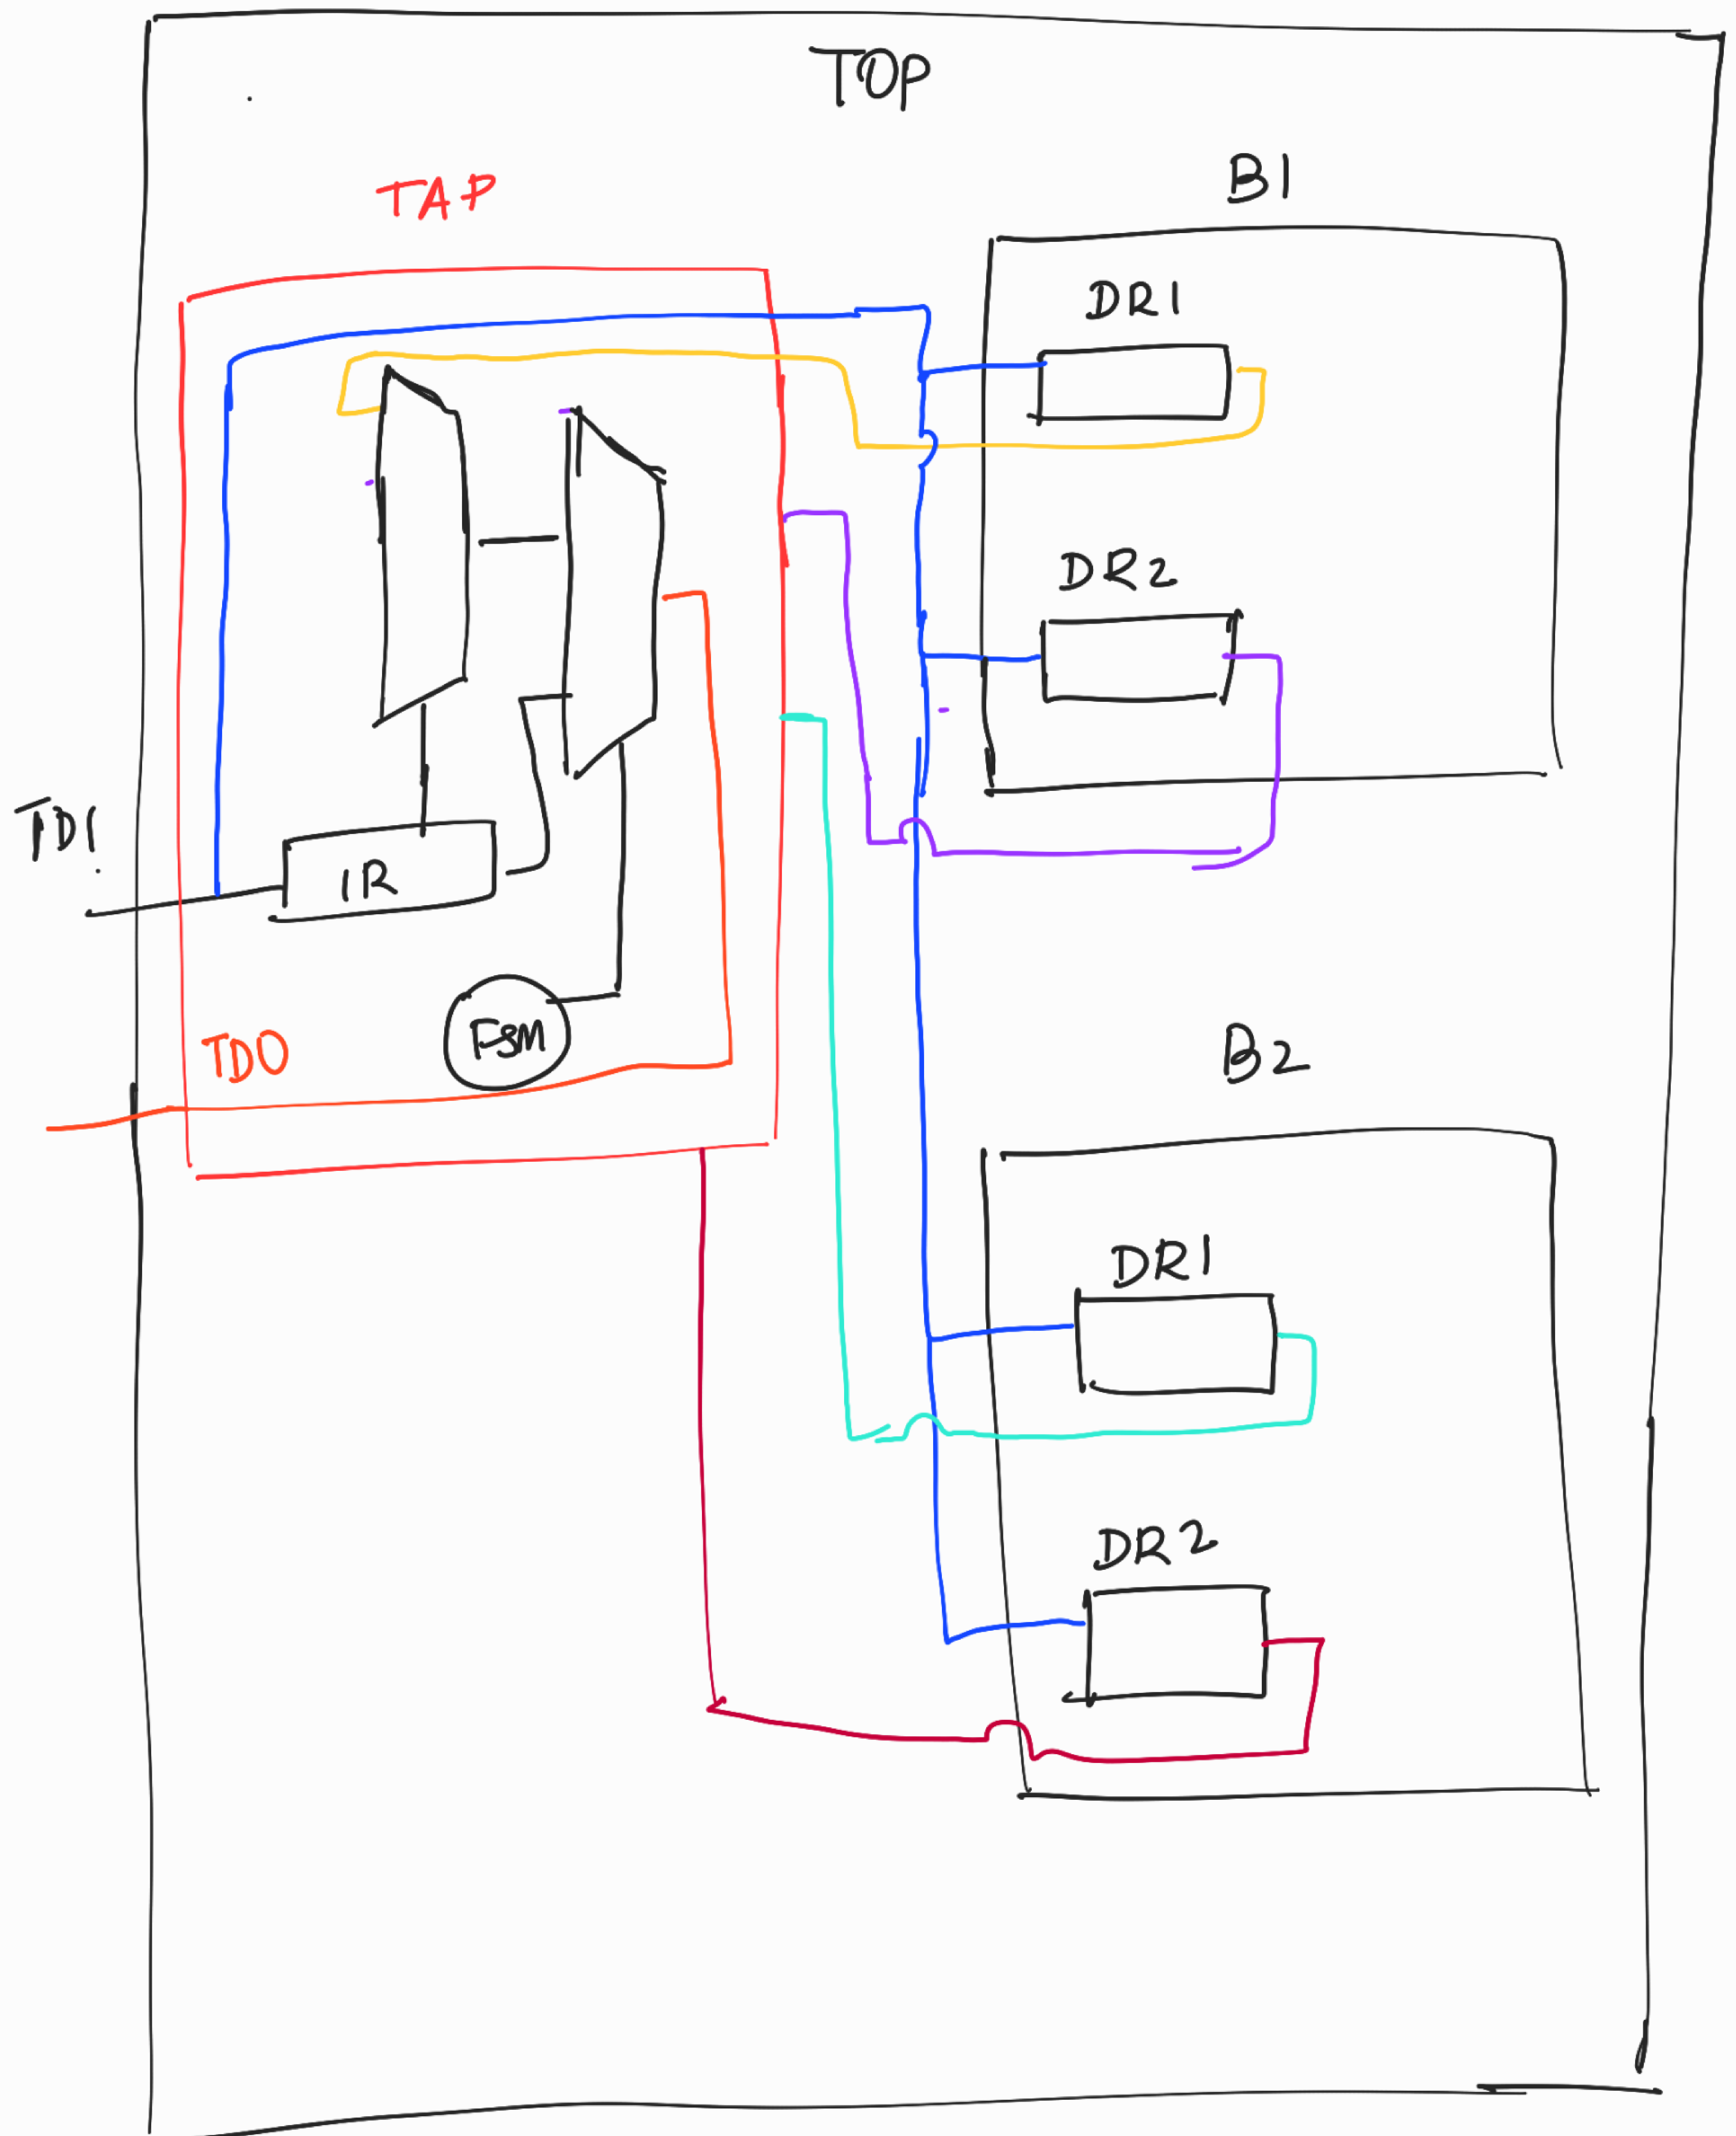


IEEE 1500 Std


TOP

B1

1149.1Std TAP

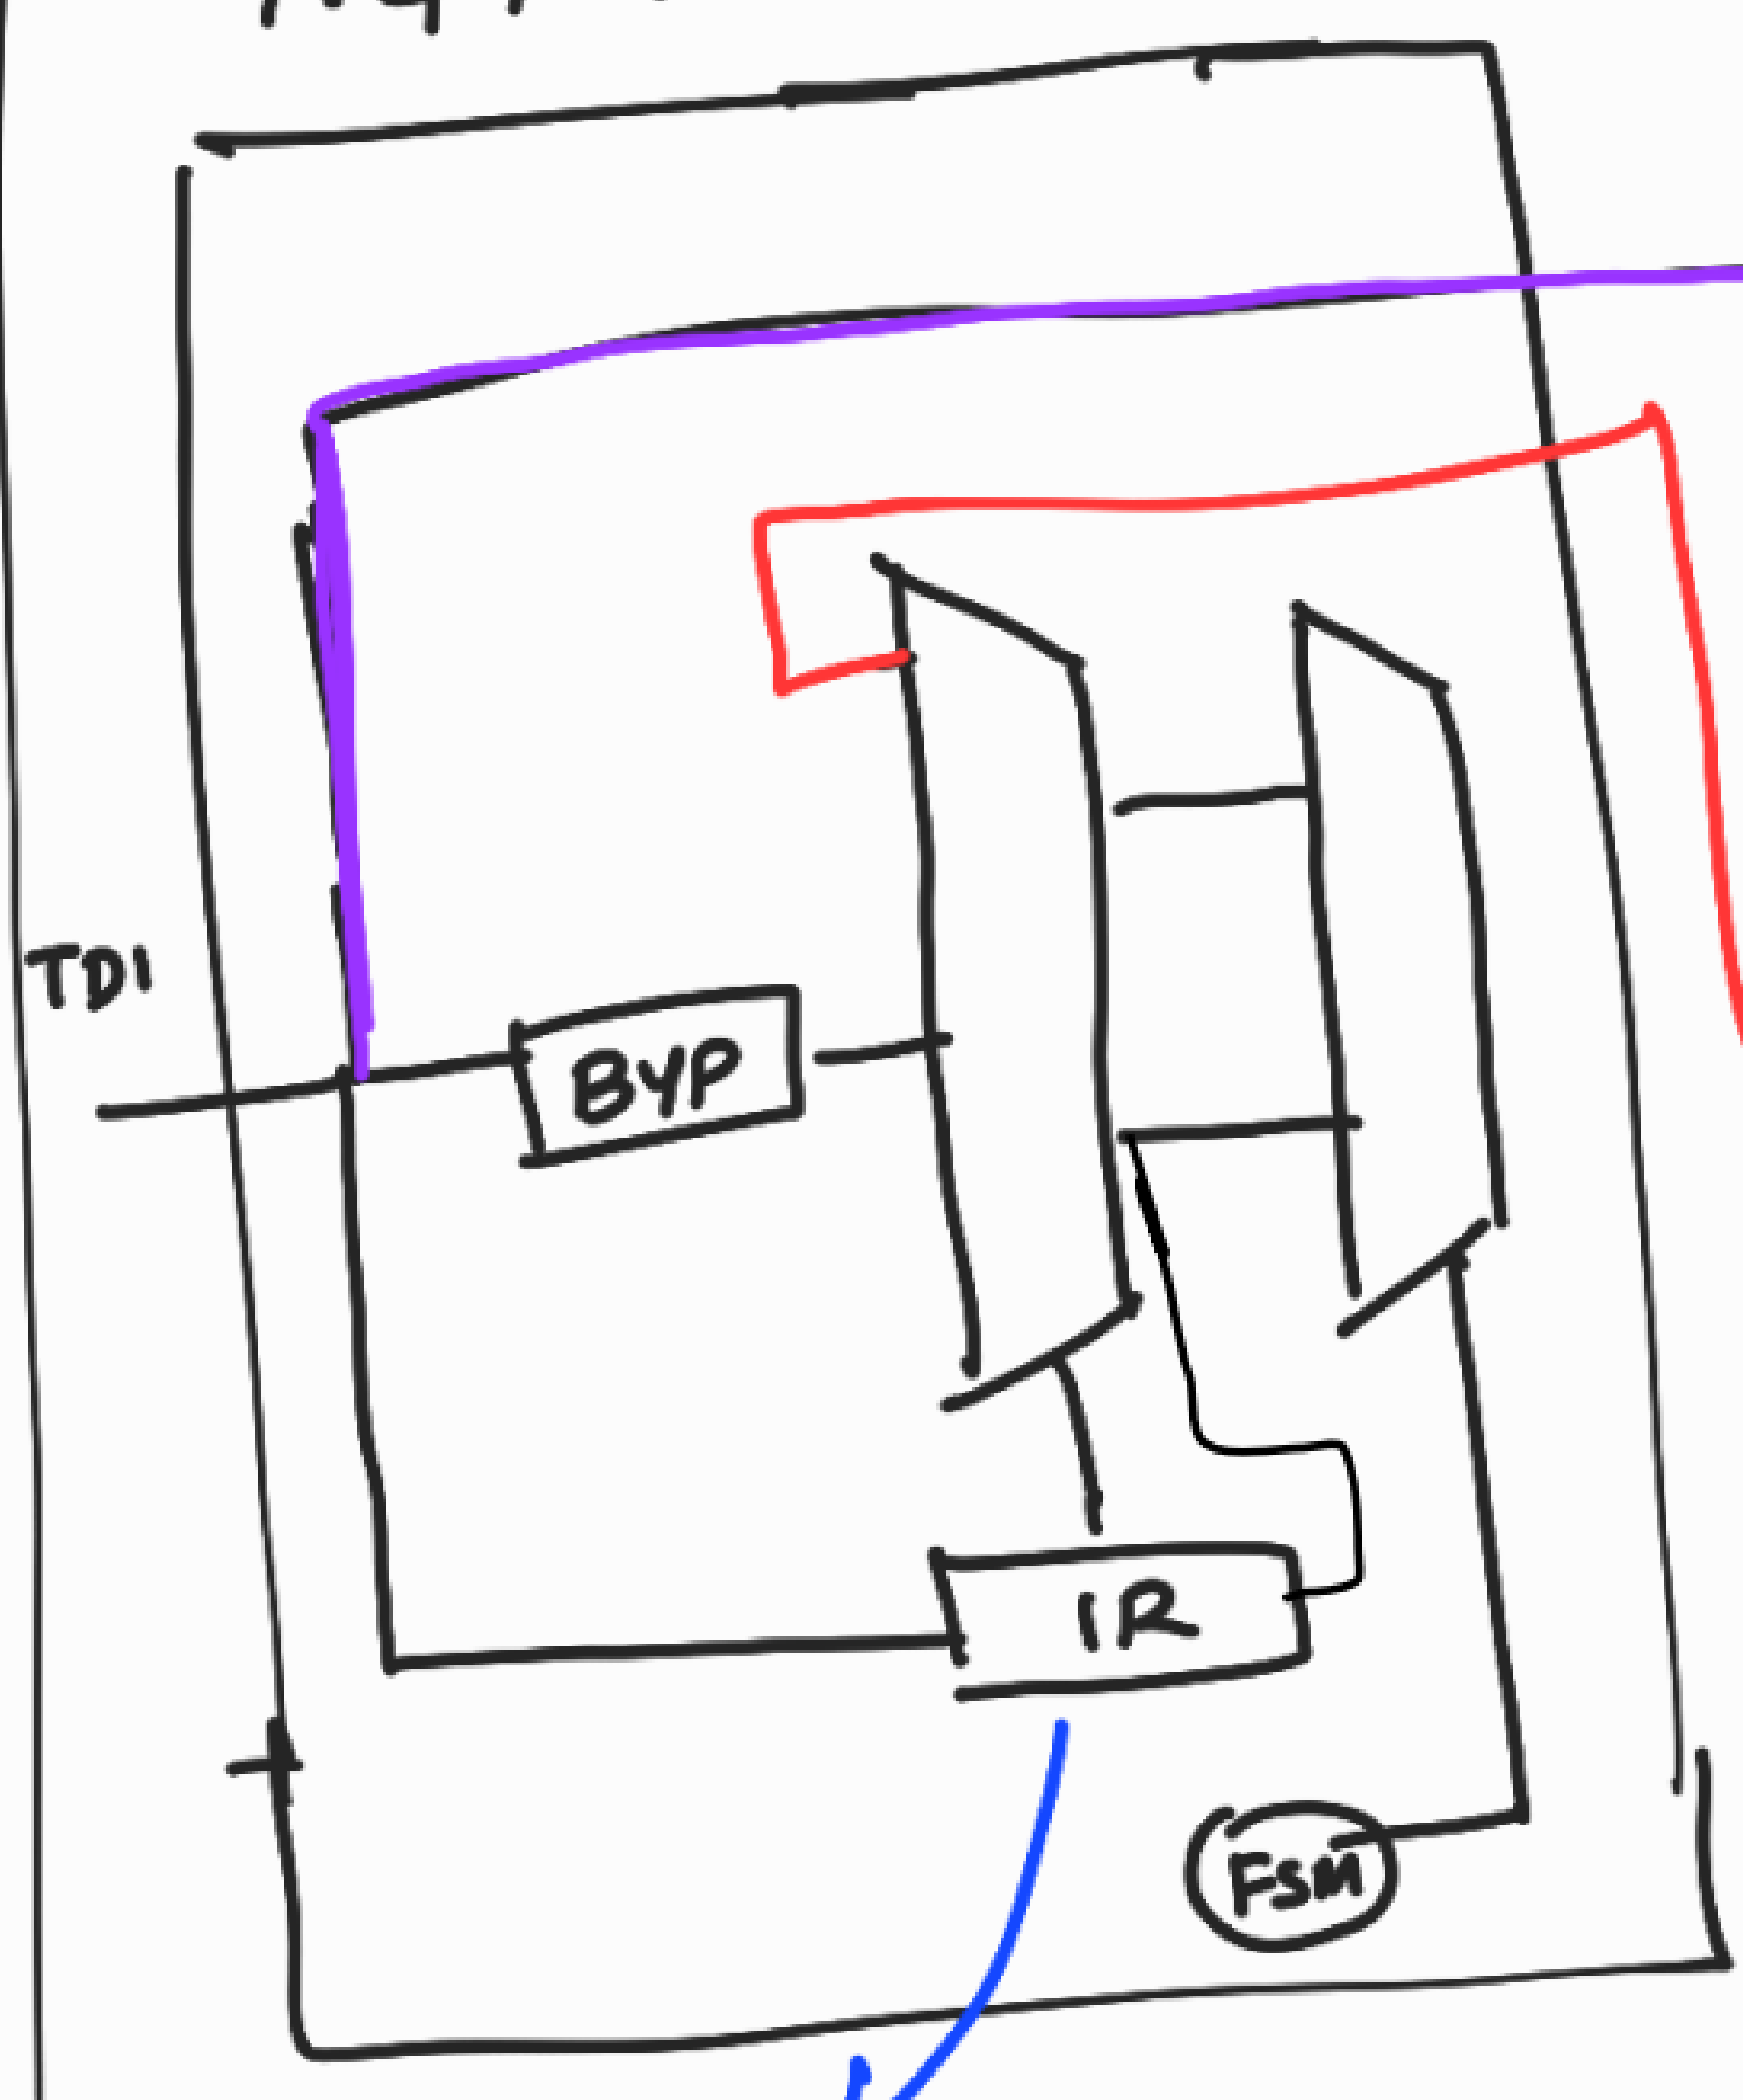


WS1
WS0

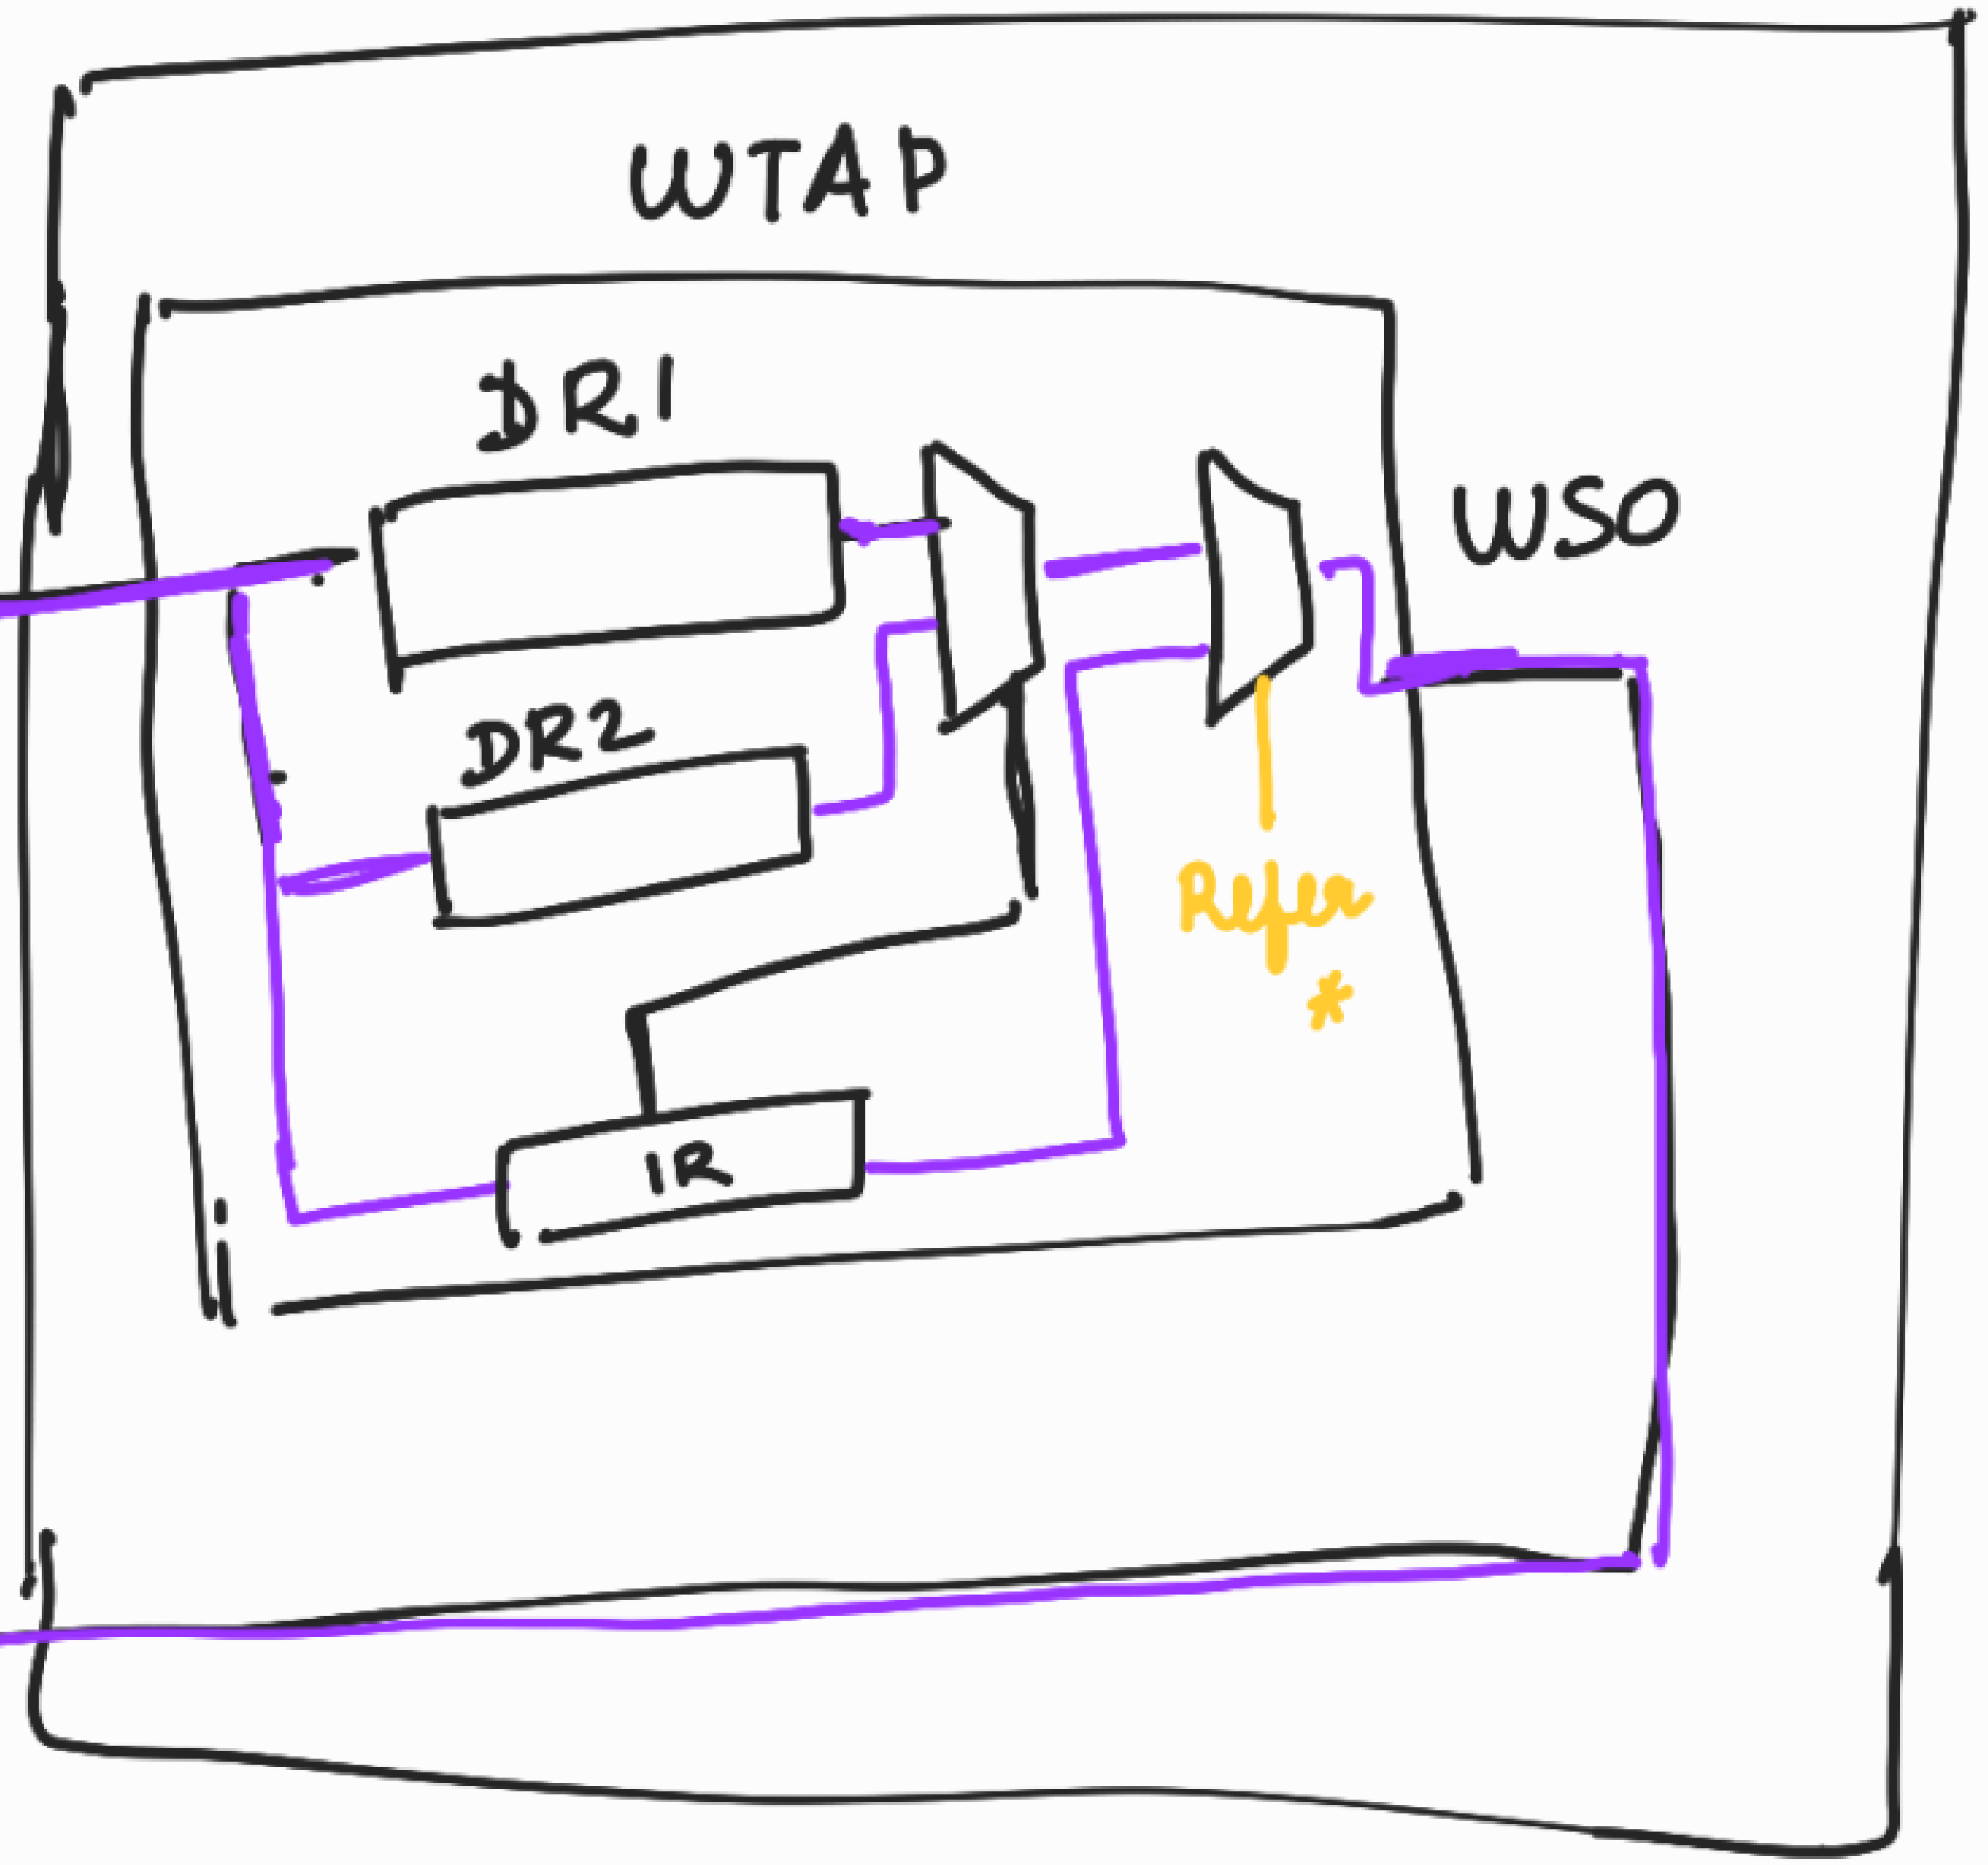

Load suitable instruction in this IR to select 1500 n/w.

B2

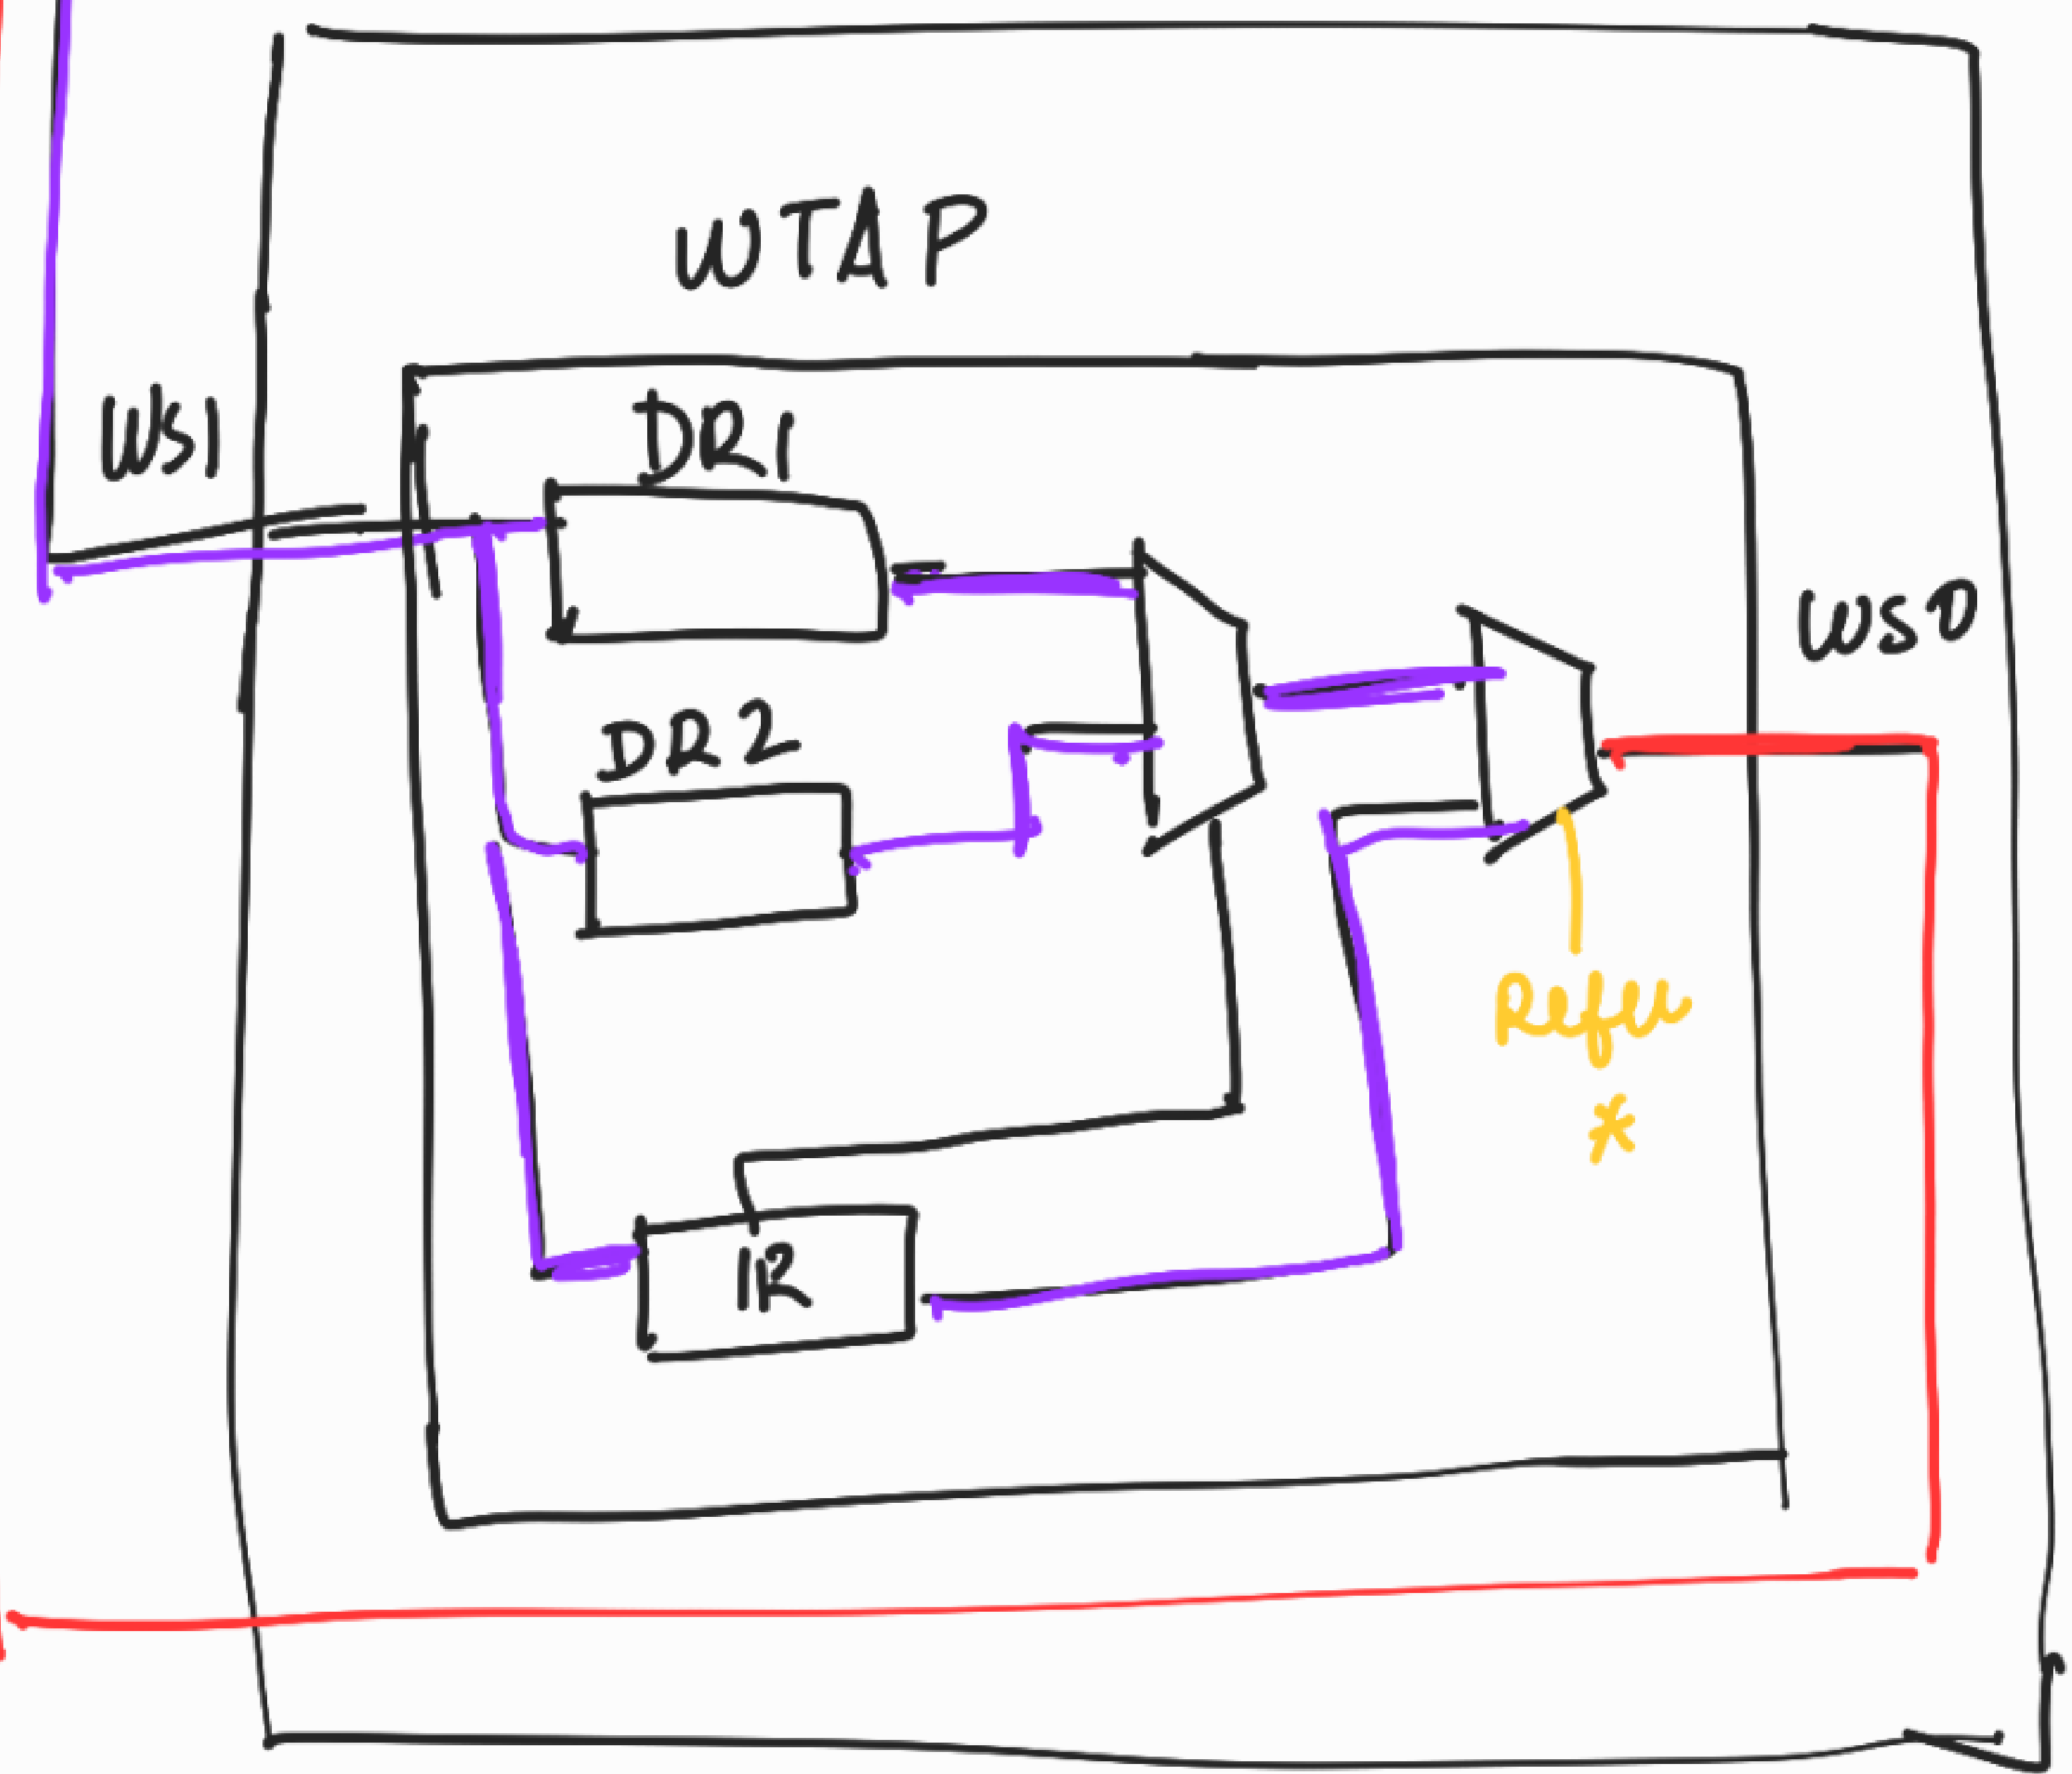



selectWIR

When high, the WTAP instruction register is accessed. When low, the data register selected by the instruction register of the WTAP is accessed.