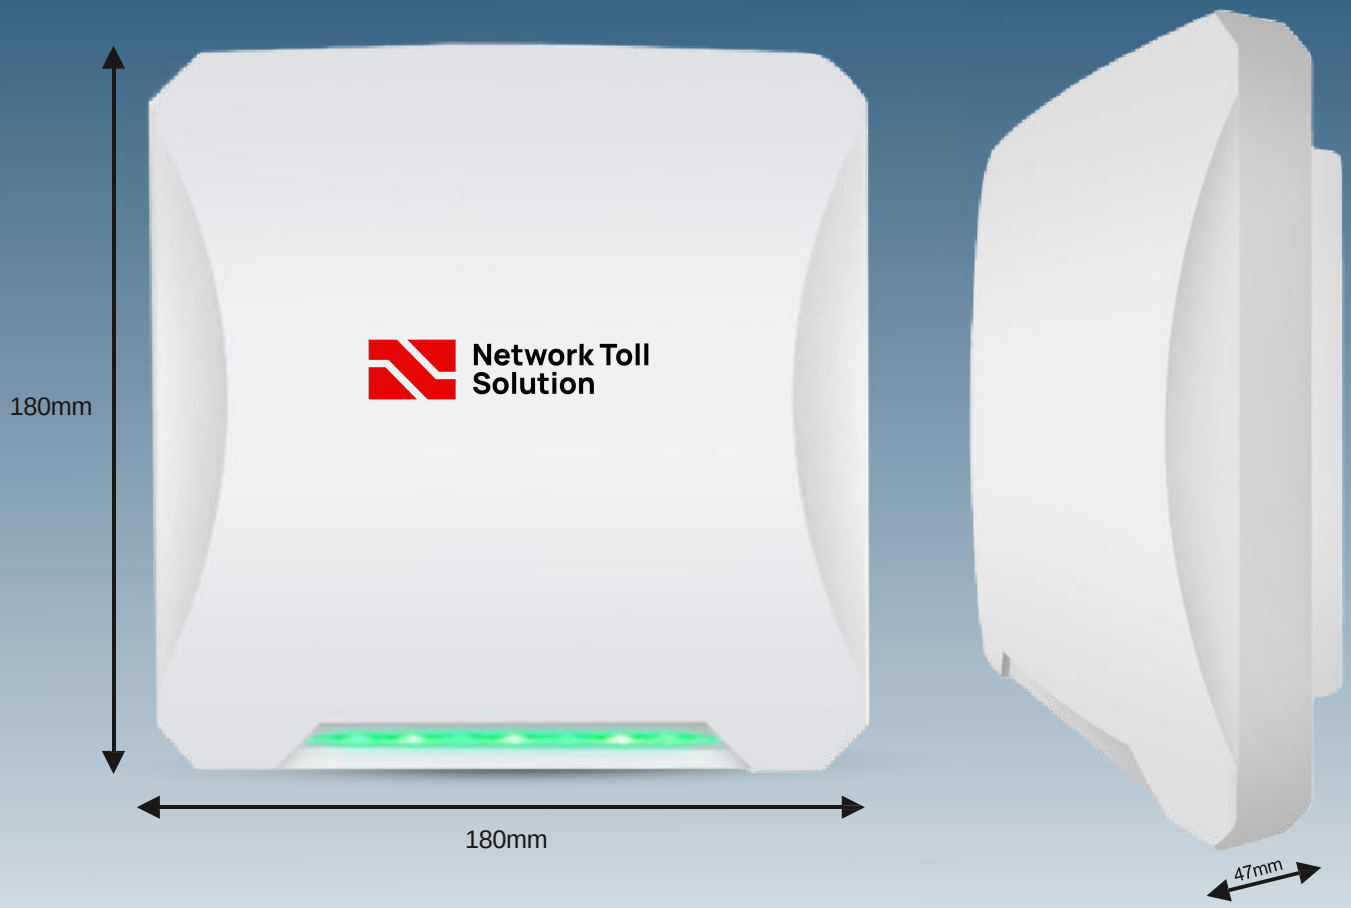



# RFID UHF MID-RANG INTEGRATED READER

## MODEL: NTS – IR 01

UHF (865-928 Mhz) | Range: 6 Meters | 9dBi Antenna | LAN, RS232, Rs485 | LED & Buzzer | Compact Design | Relay Inbuilt | IP66 Outdoor Use | SDK, Demo Software | Password Mode

## Description

NTS-IR 01 is a sleek and compact next generation RFID reader powered with 9 dbi linear polarized integrated antenna to facilitate fast and accurate tag identification process. It works on global UHF frequency (865-868MHz, 902-928 MHz) standards and has a read range of up to 6 meters. It is a cost- effective high-performance reader and is most widely used in applications like vehicle tracking in parking lots, access control for flap/ boom barriers, event management, projects related to R&D etc. where required read range is medium in nature. The product is IP 66 rated and has an inbuilt LED and buzzer for tag identification. It comes with mounting accessories, adapter and SDK for configuration and integration with third party software.

Network Toll Solution Pvt. Ltd
Corporate Office: Unit No. 1008, Tower 3, Aastha Green, Sector 4, Greater Noida West, 201306
website: www.networktoll.com Email: sales@networktoll.com ontact: +919289757018

Network Toll Solution

## Specification

| Physical Characteristics | |
|---|---|
| Dimensions | 180mm x 180mm x 47mm |
| Weight | 900 Grams Approx without adapter and mounting clamp |
| Power Supply | 100-240V,DC + 12V (adapter) |
| Power Consumption | <1 Watt |
| Power Type | Adapter Power |
| Outer Body | ABS Plastic |
| Reading notification | Integrated LED (Red and Green) and Buzzer |
| **UHF** | |
| Protocol | ISO18000-6B, EPC Class 1Gen2 (ISO 18000 - 6C) |
| Operating Frequency | 865 MHz - 868 MHz (India and EU standard,<br>902 MHz - 928 MHz (US standard) |
| Frequency Hopping | FHSS |
| Antenna Gain | Integrated 9 dBi Linear/ Circular antenna |
| RF Power | 0 - 30 dBm (can be adjusted by software) |
| Receiving Sensitivity | - 85 dBm |
| Operating Mode | Active mode, Answer mode, Trigged mode |
| Read Range | Up to 6 meters (Tag and Environment dependent) |
| Read Rate | 100 Tags/ mili second |
| **Communication** | |
| Interface | RJ45 (TCP/IP), RS232 (Serial Port), RS485, Wiegand 26/34, |
| Relay | Inbuilt |
| **Environmental Specification** | |
| Operating Temperature | -10°C + 55°C |
| Storage Temperature | -20°C + 75°C |
| Humidity | 5% RH to 95% RH non condensing |
| IP Protection Class | IP66 |
| Usage Type | Outdoor use |
| **Developing Platform** | |
| Demo Software | Free demo software for configuration, read & write functions |
| SDK | C#, VC, VB, Java Linux, Delphi |
| Expansion | Supports up to 128 GB Micro SD card |
| **Accessories** | |
| Inclusion | Power Adapter, Mounting clamp |

## Application Areas



Parking


Vehicle Access Control


Attendance Tracking



R & D Projects


Production Line Management


Warehouse

Network Toll Solution Pvt. Ltd
Corporate Office: Unit No. 1008, Tower 3, Aastha Green, Sector 4, Greater Noida West, 201306
Website: www.networktoll.com Email: sales@networktoll.com Contact: +919289757018