HIC HYDRAULIC

Product Catalogue 2026

High pressure hoses, couplings and valves.
Manufactured in India. Exported to 33 countries.

universal@hic-india.com +91 88266 79660

About HIC Hydraulic

Since 1988, HIC Hydraulic (HIC International Co Inc, New Delhi) has manufactured high pressure hydraulic hose, camlock quick couplings, ball valves and hose assemblies for customers on five continents. Every coil is batch-tested on our in-house impulse rig, traceable to compound batch and mandrel run, and exported with certificates of conformance, burst and impulse test reports, and EN 10204 3.1 material certificates on request. This catalogue summarises the standard range; custom constructions and private labelling are available on request.

Contents

01 High Pressure Hydraulic Hose
02 Camlock Quick Couplings
03 High Pressure Ball Valves
04 Hose Assemblies and End Fittings
05 Instrumentation Needle Valves
06 Suction and Discharge Hoses
07 Steam and Hot Water Hose
08 UHP Waterblast Assemblies
09 Check and Flow Control Valves
10 Tank Truck and Dock Hoses

01

High Pressure Hydraulic Hose

SAE 100 R1 to R15, EN 853 / EN 856 wire braided and spiral hoses to 640 bar.

Key specifications

- Size: 3/16 in to 2 in
- Impulse: 1,000,000 cycles (R15)
- Temp: -40 C to +100 C

[Product photograph]

02

Camlock Quick Couplings

SS 316, brass, aluminium and PP cam and groove couplings, types A to F with dust caps and plugs.

Key specifications

- Size: 1/2 in to 6 in
- Std: MIL-C-27487 / A-A-59326
- Gaskets: NBR, EPDM, Viton

[Product photograph]

03

High Pressure Ball Valves

2-way and 3-way hydraulic ball valves in carbon steel and SS 316.

Key specifications

- Size: 1/4 in to 2 in
- Rating: up to 500 bar
- Seats: POM / PTFE

[Product photograph]

04

Hose Assemblies and End Fittings

Crimped, hydrostatically tested and certified assemblies built to drawing.

Key specifications

- Test: 1.5x working pressure
- Certs: EN 10204 3.1 on request
- Private label available

[Product photograph]

05

Instrumentation Needle Valves

Precision flow control valves for instrumentation and sampling lines.

Key specifications

- Rating: 6000 PSI
- Material: SS 316
- Threads: NPT / BSP

[Product photograph]

06

Suction and Discharge Hoses

Oil, water, slurry and dock hoses for petroleum transfer and dredging.

Key specifications

- Size: 2 in to 12 in
- Rating: 10 to 20 bar
- Flanged or camlock ends

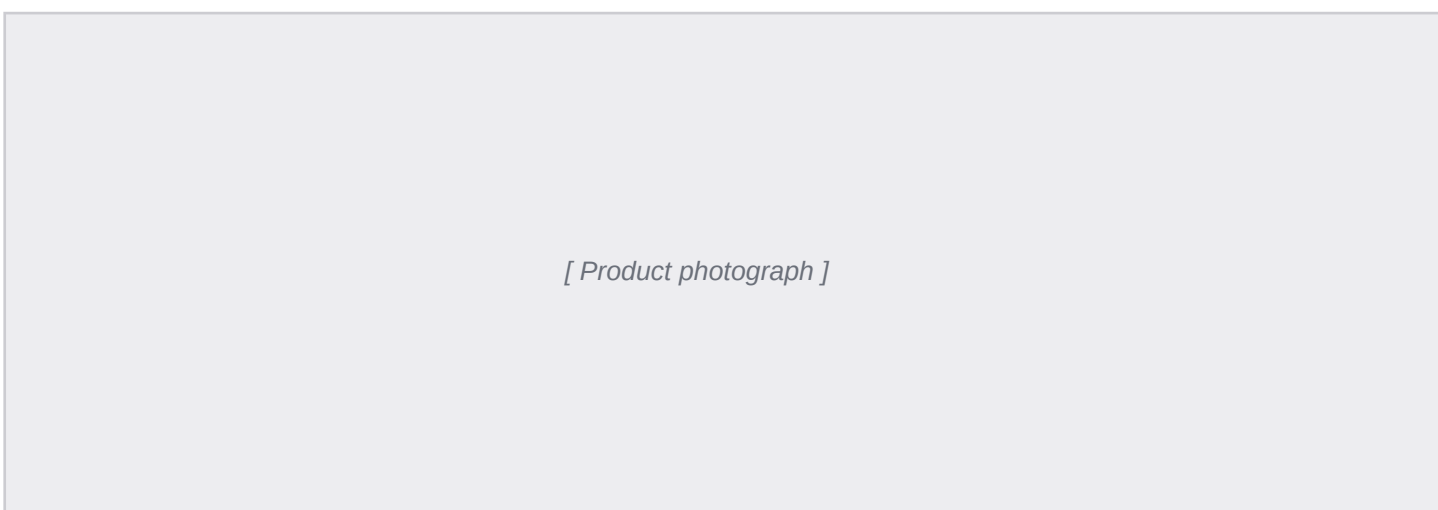

07

Steam and Hot Water Hose

EPDM steam hose for saturated steam service to 17 bar / 208 C.

Key specifications

- Size: 1/2 in to 2 in
- Std: BS 5342
- Cover: pin-pricked EPDM

[Product photograph]

08

UHP Waterblast Assemblies

Ultra high pressure spiral assemblies for waterjetting and hydro-demolition.

Key specifications

- Rating: to 1100 bar
- Fittings: M-type, NPT
- Safety covers available

[Product photograph]

09

Check and Flow Control Valves

Non-return, swing check and flow control valves for hydraulic circuits.

Key specifications

- Cracking: 0.5 bar std
- Material: CS / SS 316
- Threads: BSP / NPT

[Product photograph]

010

Tank Truck and Dock Hoses

Composite and rubber hoses for road tanker bottom loading and bunkering.

Key specifications

- Std: EN 13765 / BS 5842
- Ends: flanged, camlock
- Certificates per batch

[Product photograph]