

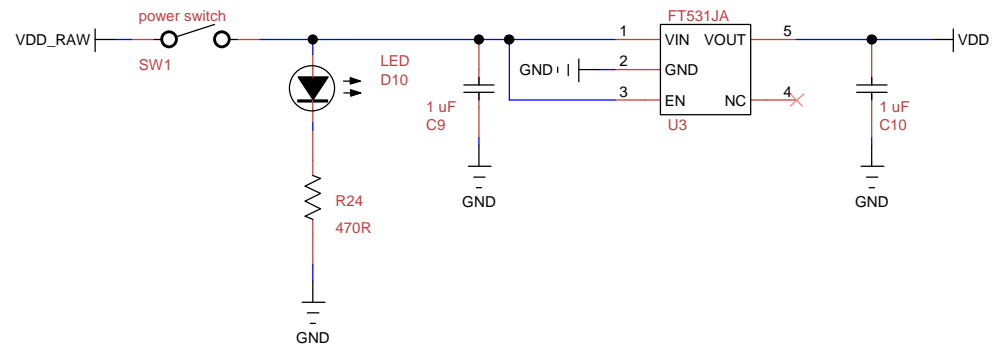
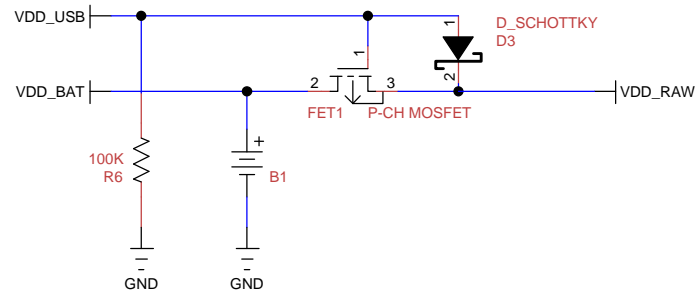



Title		
Author		
File	Document	
	M:\DRI\dashboard_v1_0\dashboard_v1_0.dsn	
Revision	Date	Sheets
1.0		1 of 1

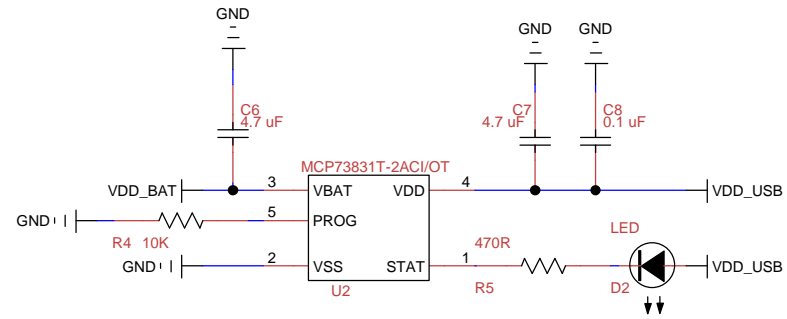

Title		
Author		
File M:\DRI\dashboard_v1_0\dashboard_v1_0.dsn		Document
Revision 1.0	Date	Sheets 2

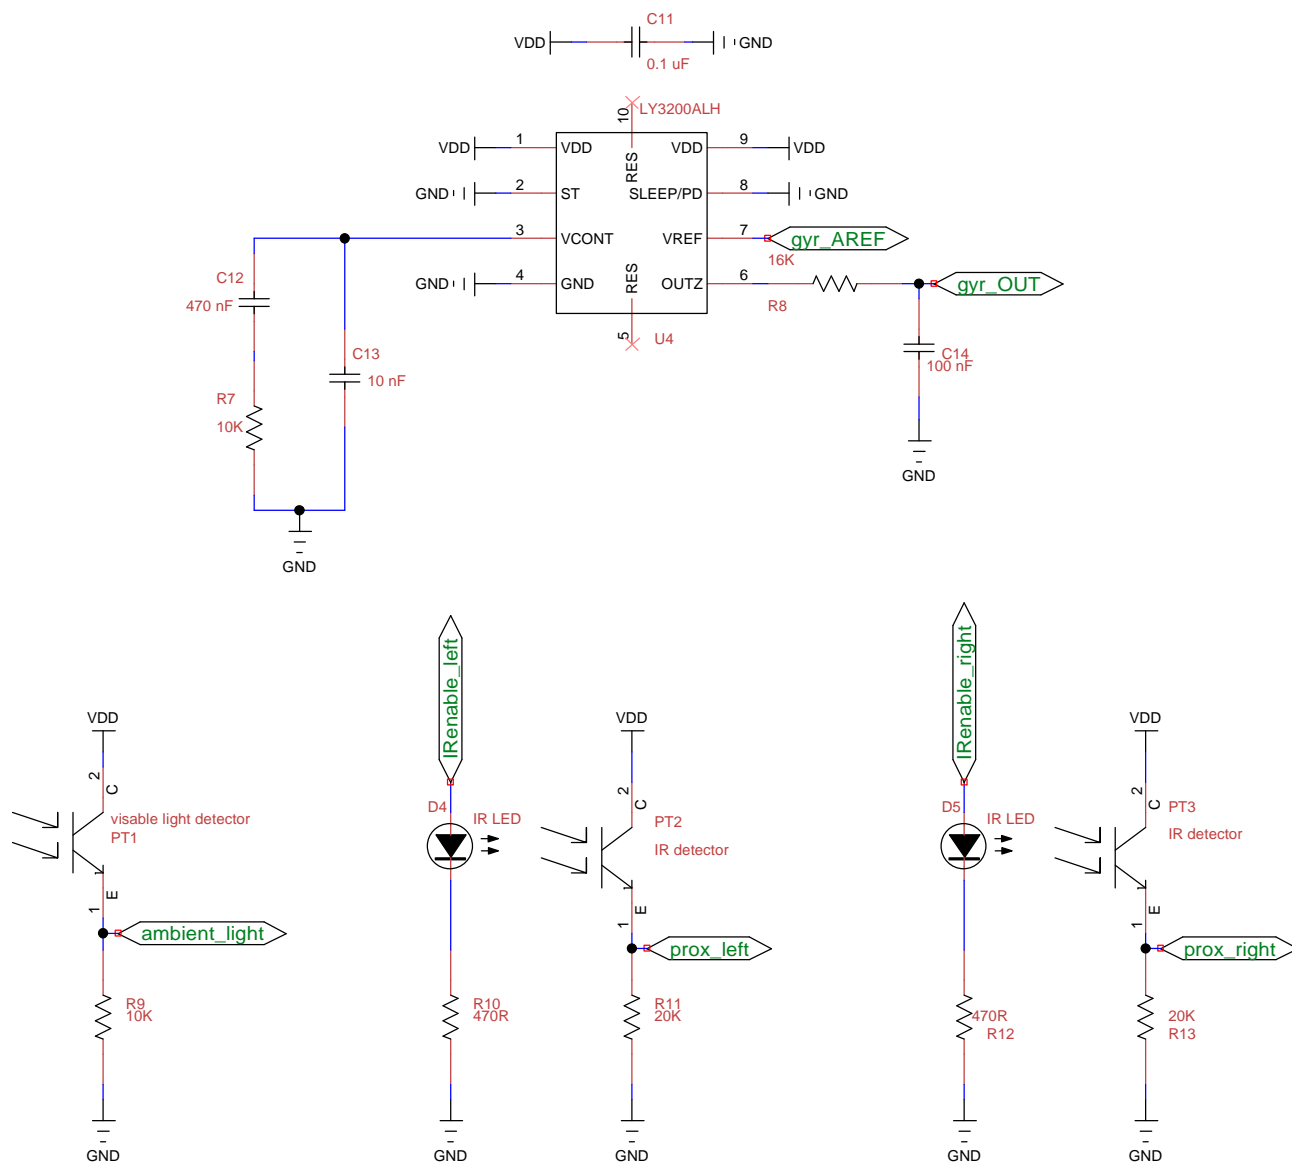



Title		
Author		
File M:\DRI\dashboard_v1_0\dashboard_v1_0.dsn		Document
Revision 1.0	Date	Sheets 3

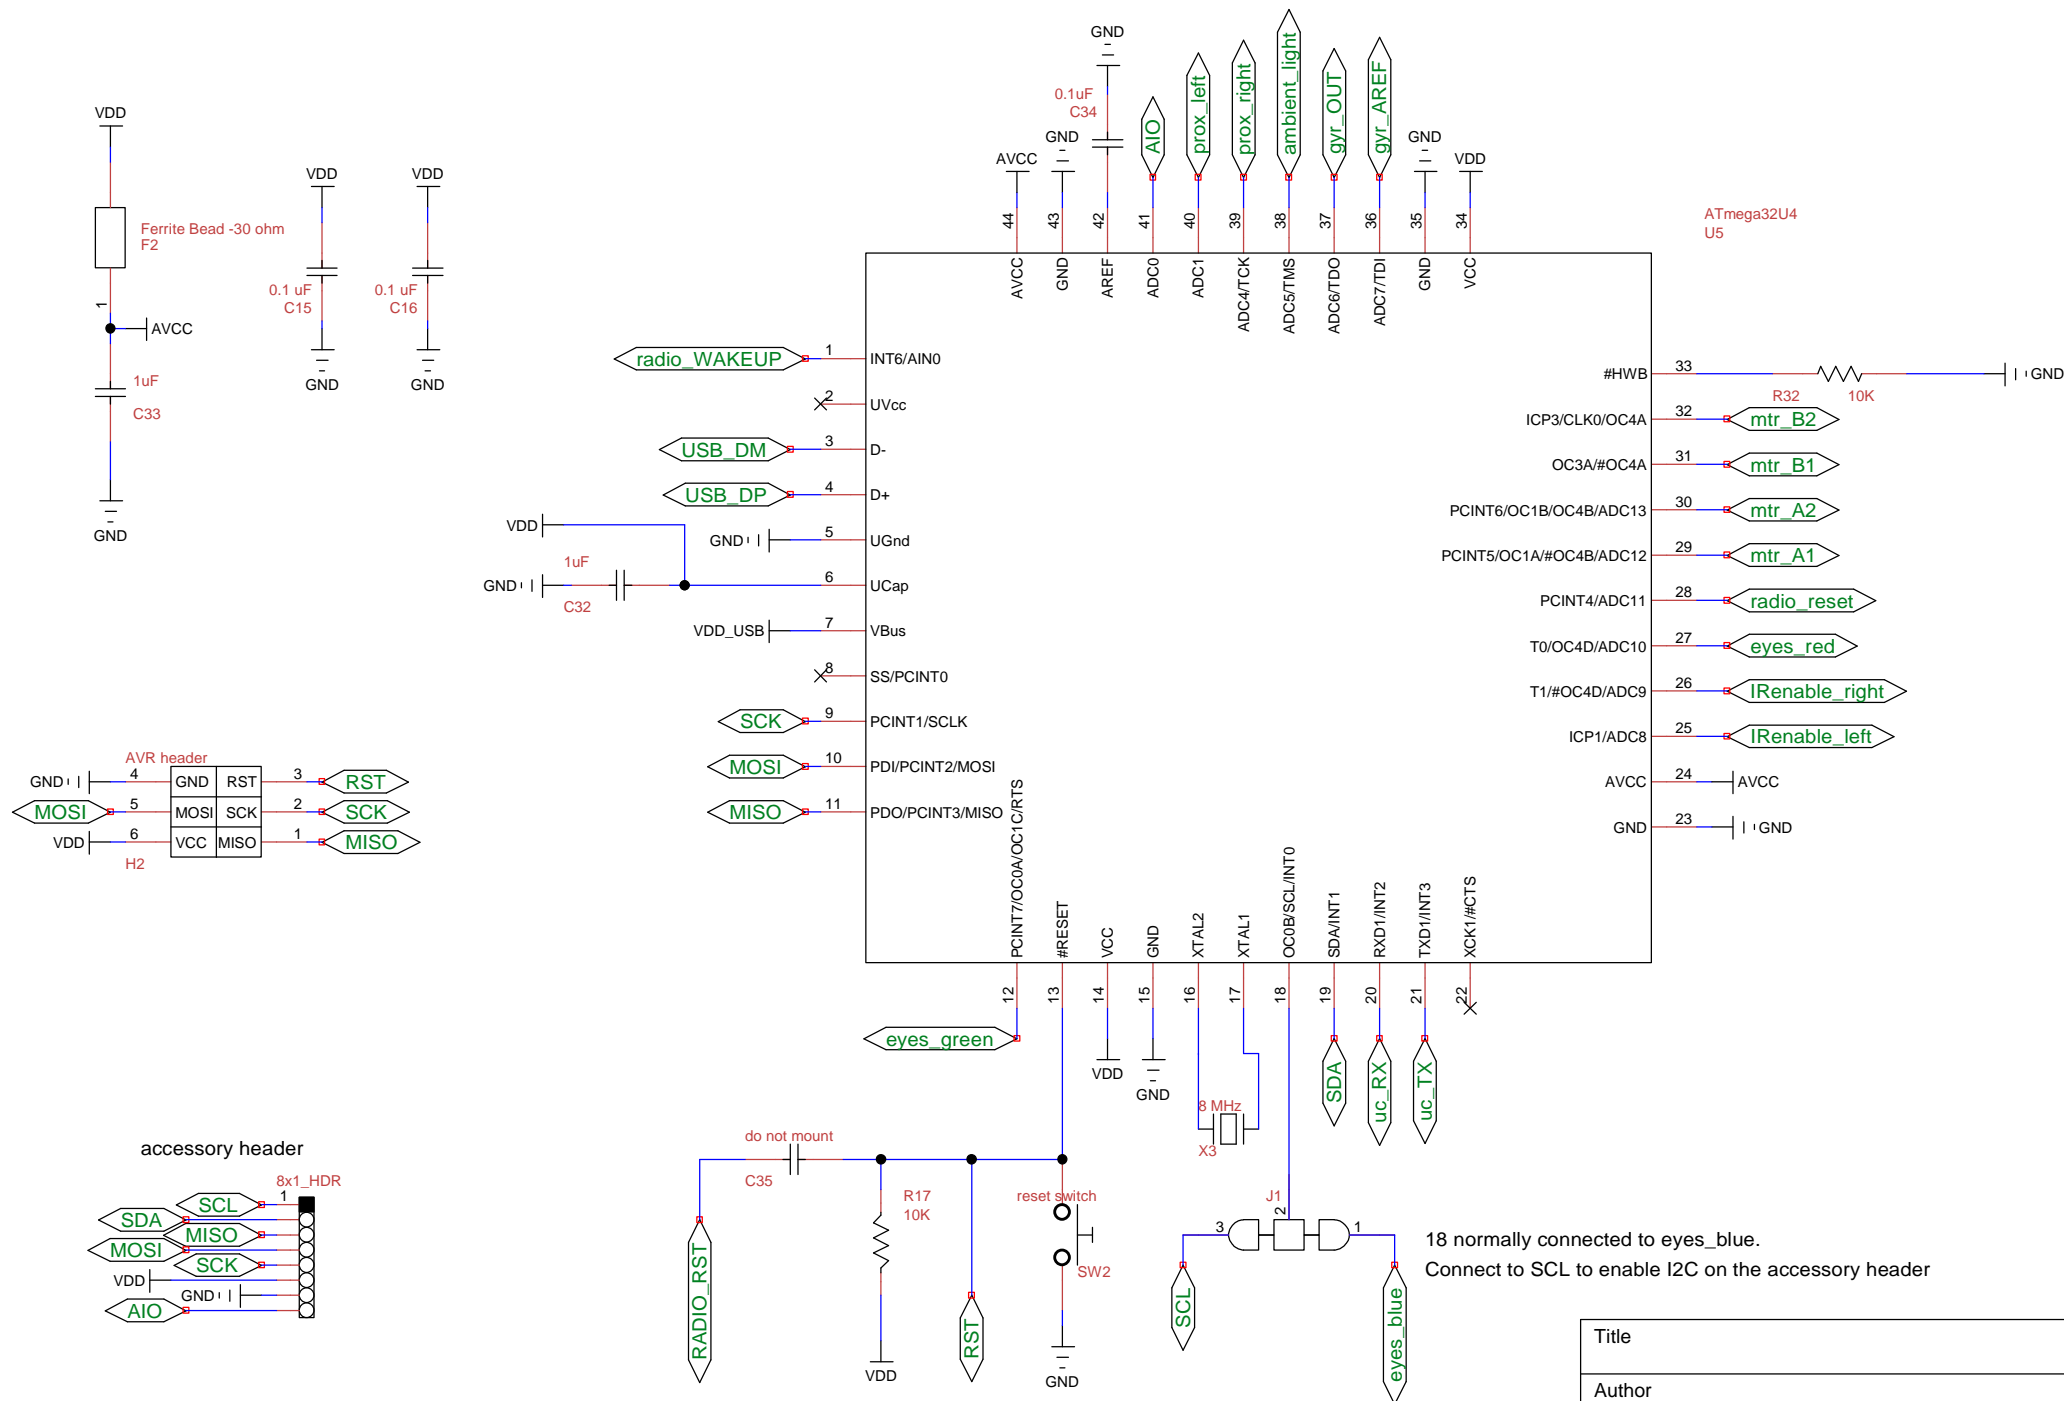



18 normally connected to eyes\_blue.  
Connect to SCL to enable I2C on the accessory header

Title		
Author		
File	M:\DR\dashboard_v1_0\dashboard_v1_0.dsn	
Revision	Date	Sheets
1.0		5

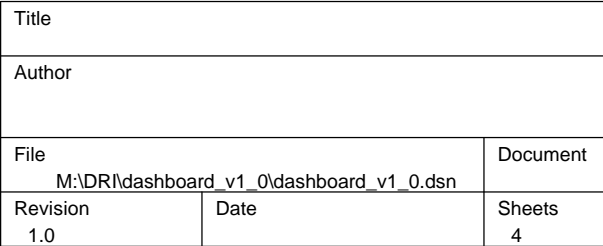

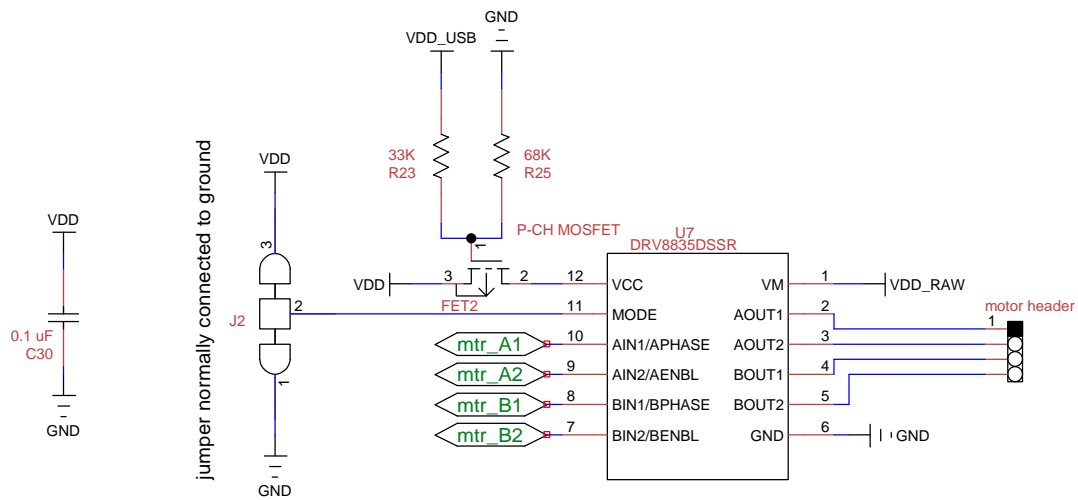

Title		
Author		
File	Document	
	M:\DRI\dashboard_v1_0\dashboard_v1_0.dsn	
Revision	Date	Sheets
1.0		6

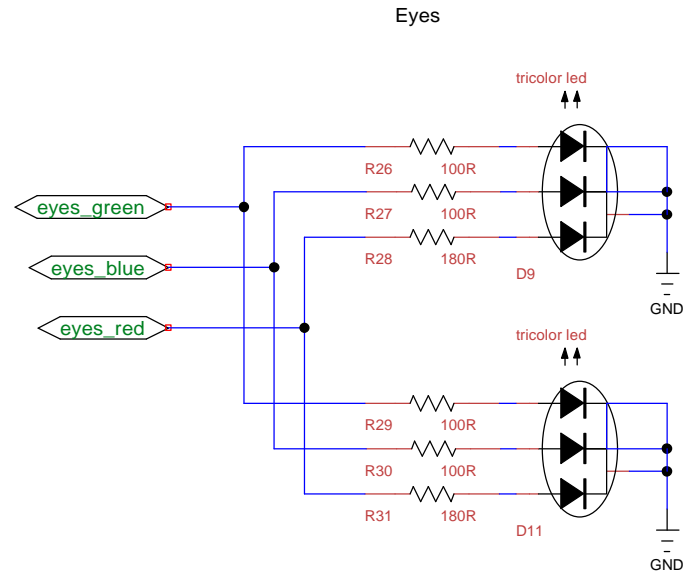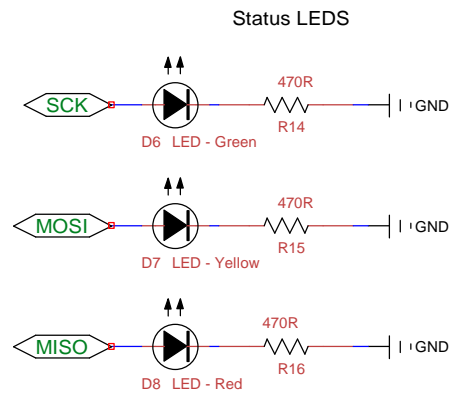

Title		
Author		
File M:\DRI\dashboard_v1_0\dashboard_v1_0.dsn		Document
Revision 1.0	Date	Sheets 7