One project, adapted inputs, one numerical core

The diagram combines application routes while preserving the boundary between the TSH2 and TRF1 fitted images.

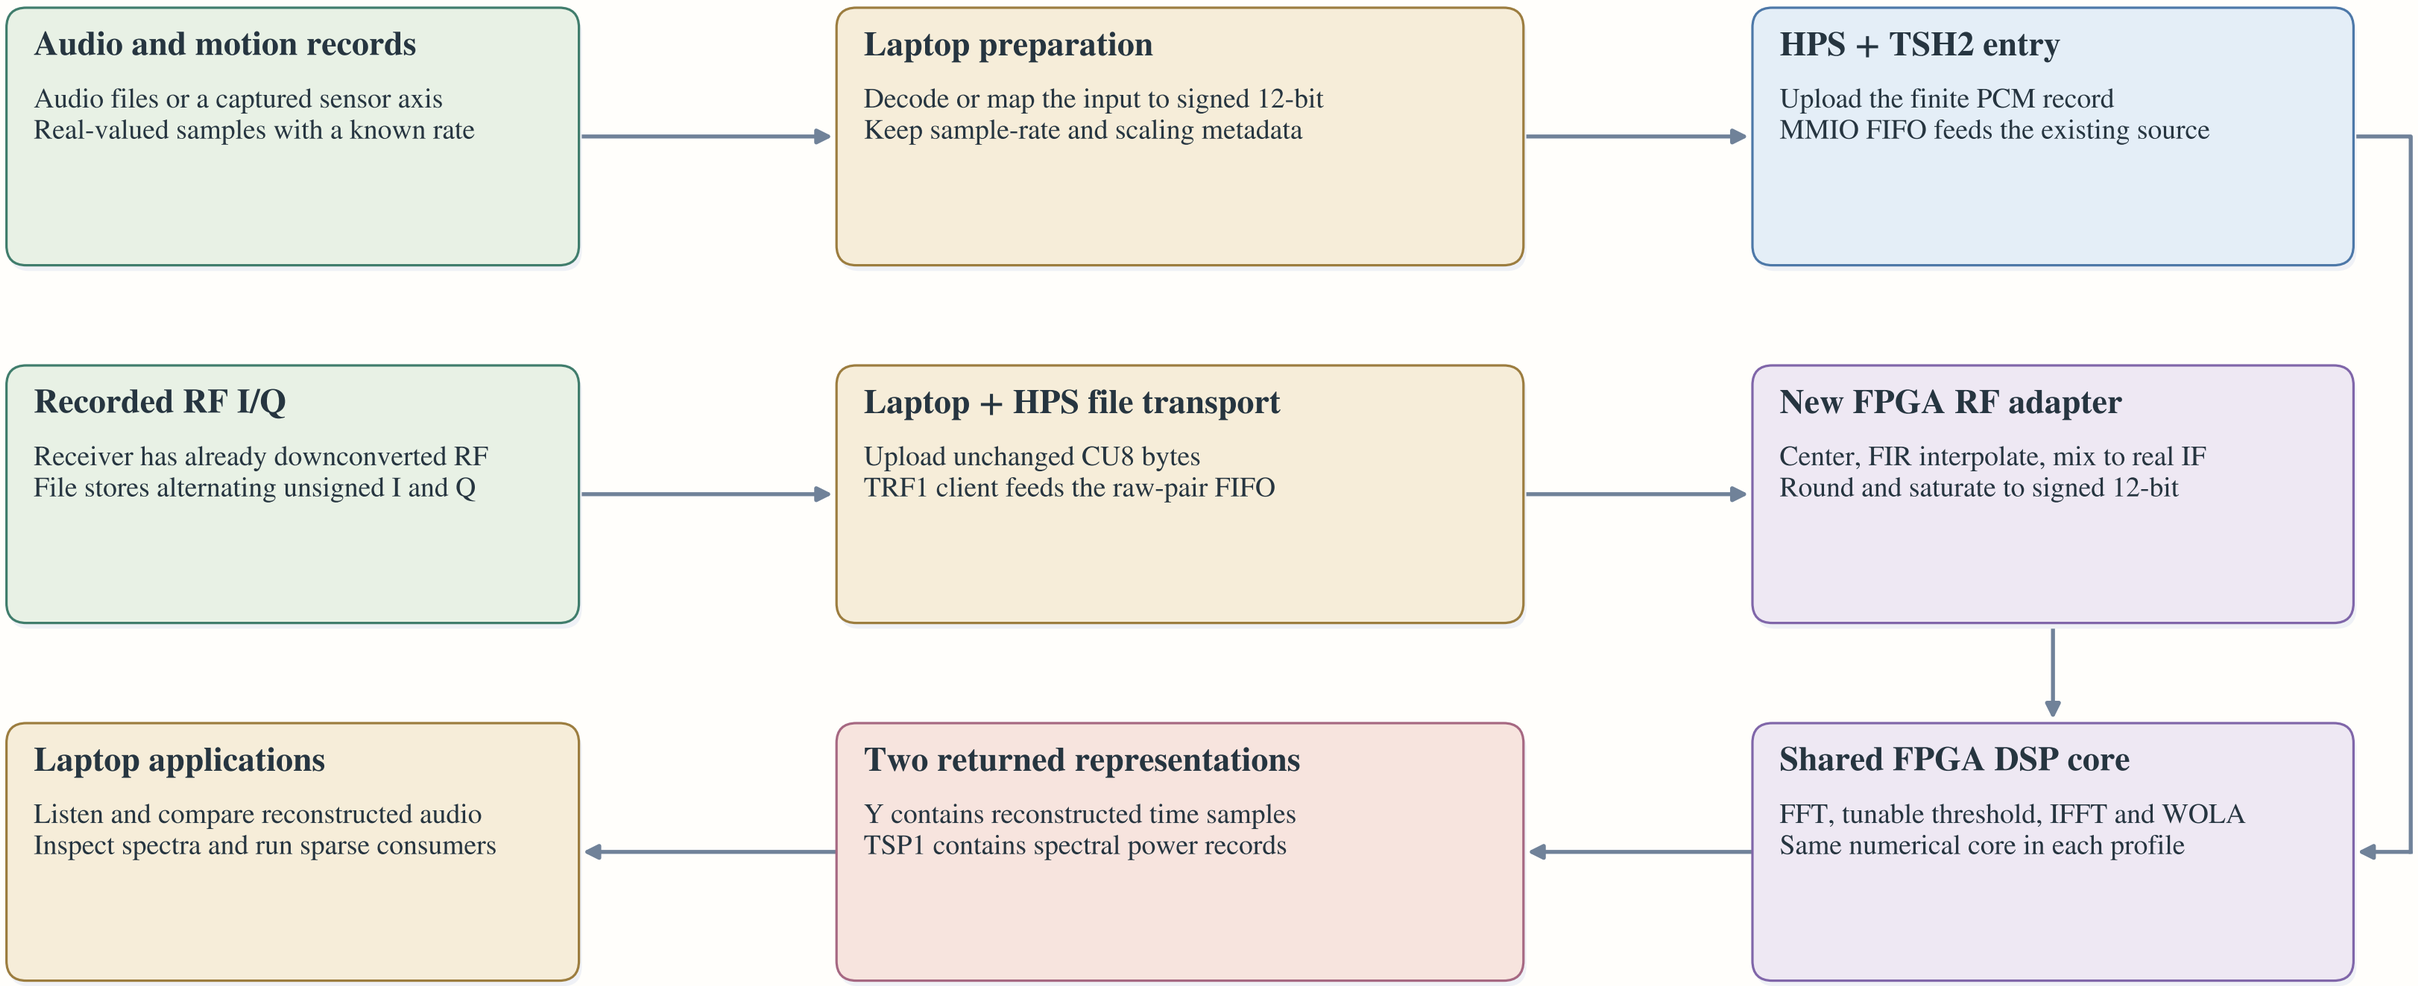

How to read the shared core

The two routes describe alternative fitted applications. They do not run simultaneously on the board and there is no runtime audio/RF selector. Accelerometer replay uses the real-sample route.

Signal input · DSP / control · Signal outputs · Host / HPS · Storage / platform · solid: data · dashed: control

SOURCE BINDINGS: C01, A01, A02, A03, R01, R04, R05 | Reviewed source structure, not new execution or timing measurements.