Host transport and finite-transaction ownership

Both applications use HPS MMIO feed and drain, while the outer file-transfer protocols remain distinct.

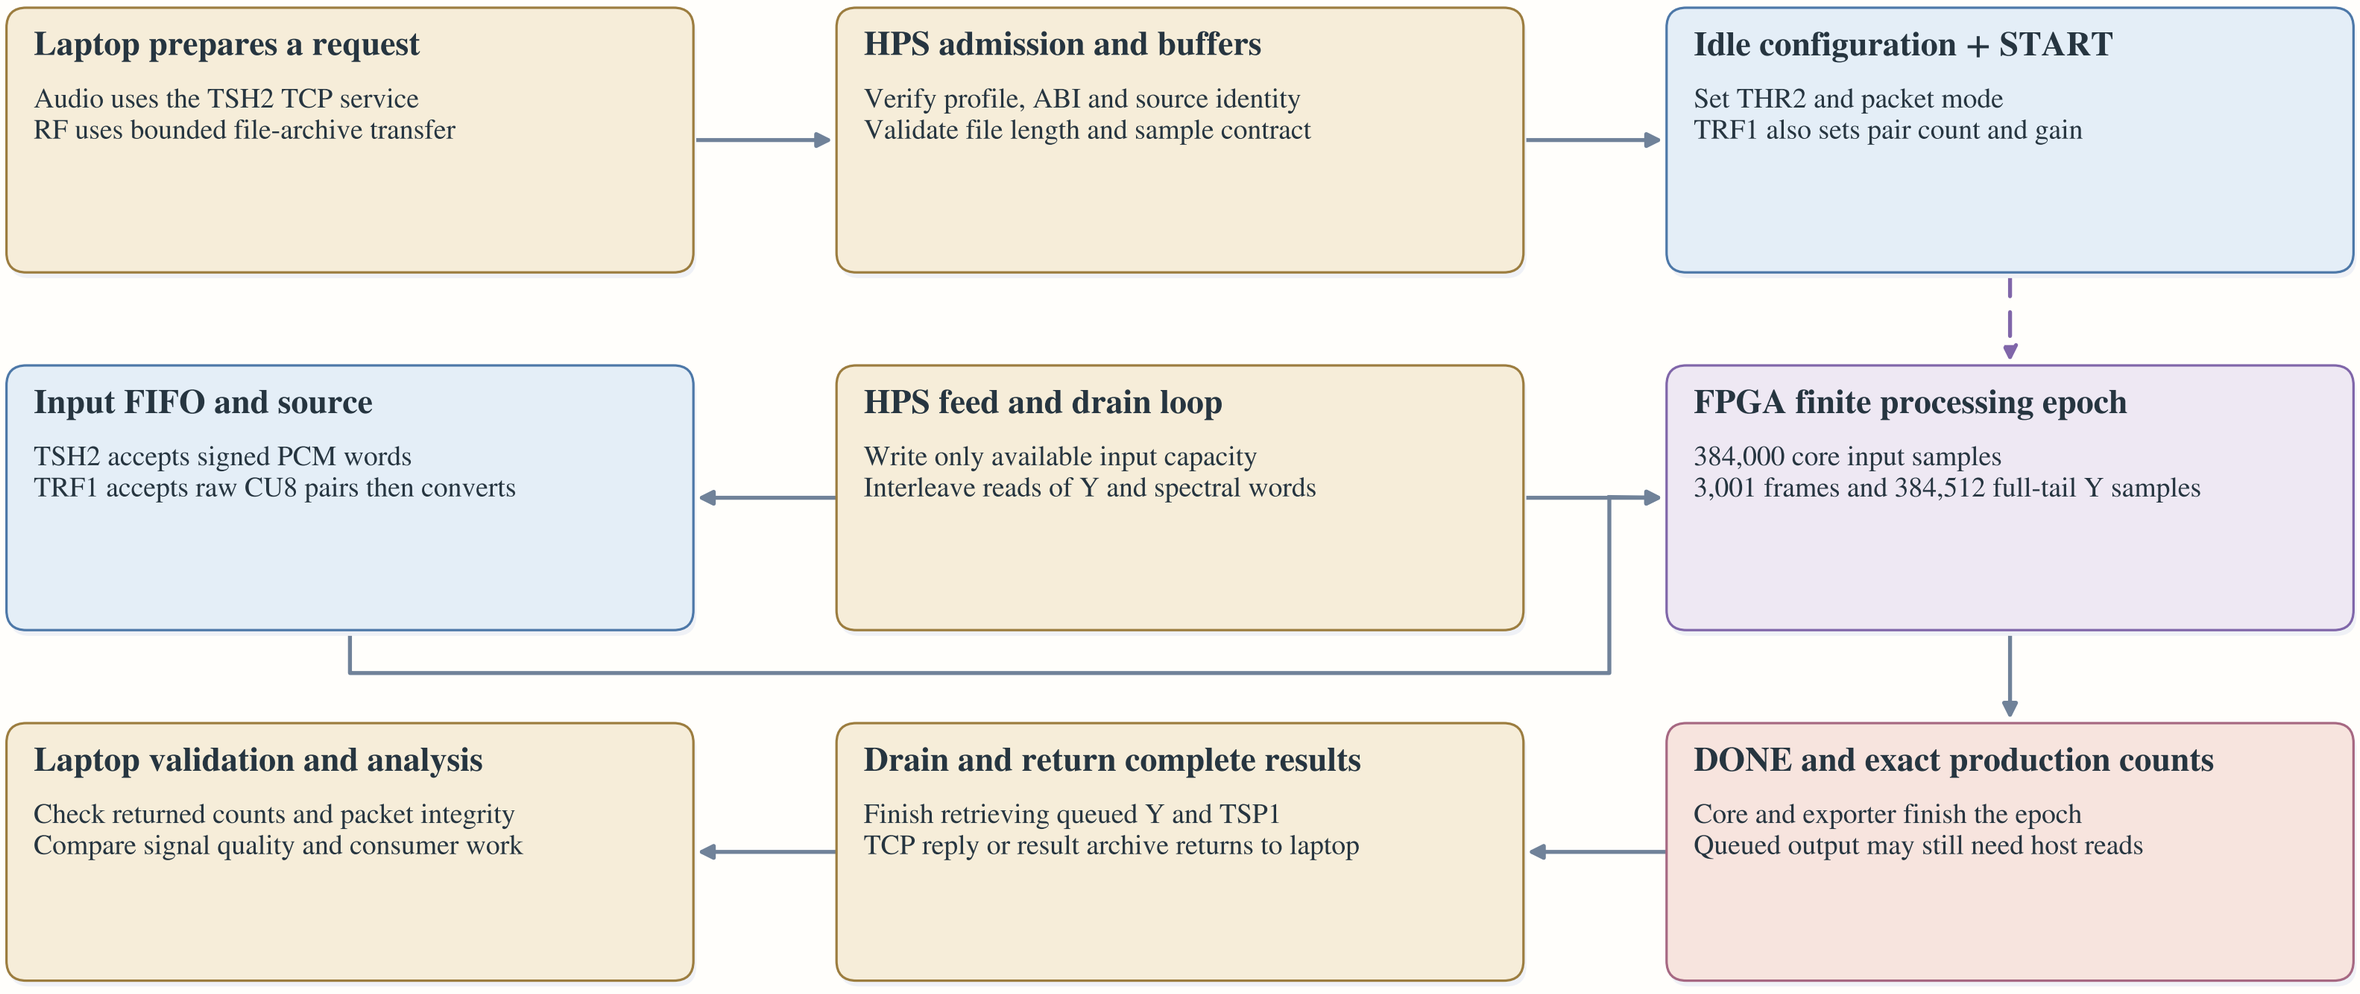

A finite buffer length does not define signal duration

The application keeps one configured geometry for admission and completion checks. Only the valid input interval should determine the physical time axis and headline RF data-reduction denominator.

Signal input · DSP / control · Signal outputs · Host / HPS · Storage / platform · solid: data · dashed: control

SOURCE BINDINGS: A01, A02, R04, R05, R07, R08, C07, C08 | Reviewed source structure, not new execution or timing measurements.