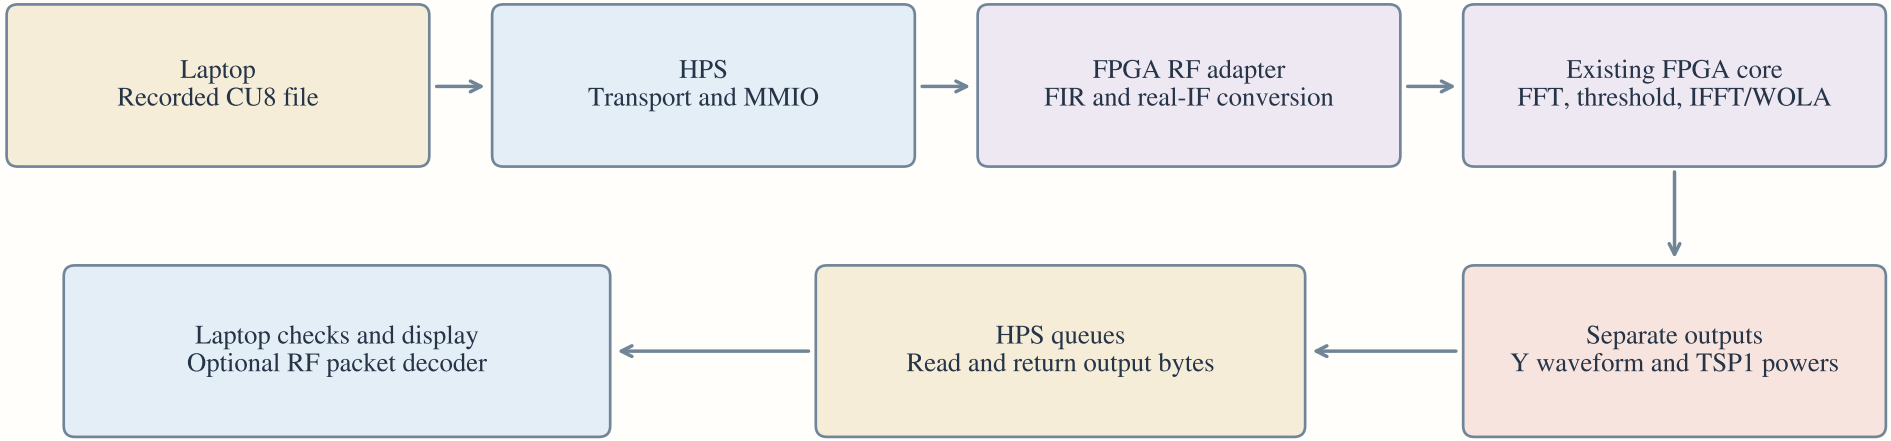
Laptop
Recorded CU8 file
HPS
Transport and MMIO
FPGA RF adapter
FIR and real-IF conversion
Existing FPGA core
FFT, threshold, IFFT/WOLA
Separate outputs
Y waveform and TSP1 powers
HPS queues
Read and return output bytes
Laptop checks and display
Optional RF packet decoder