Input contracts and build configurations

Signal interpretation is preserved at the boundary while the common core receives a single real-sample token format.

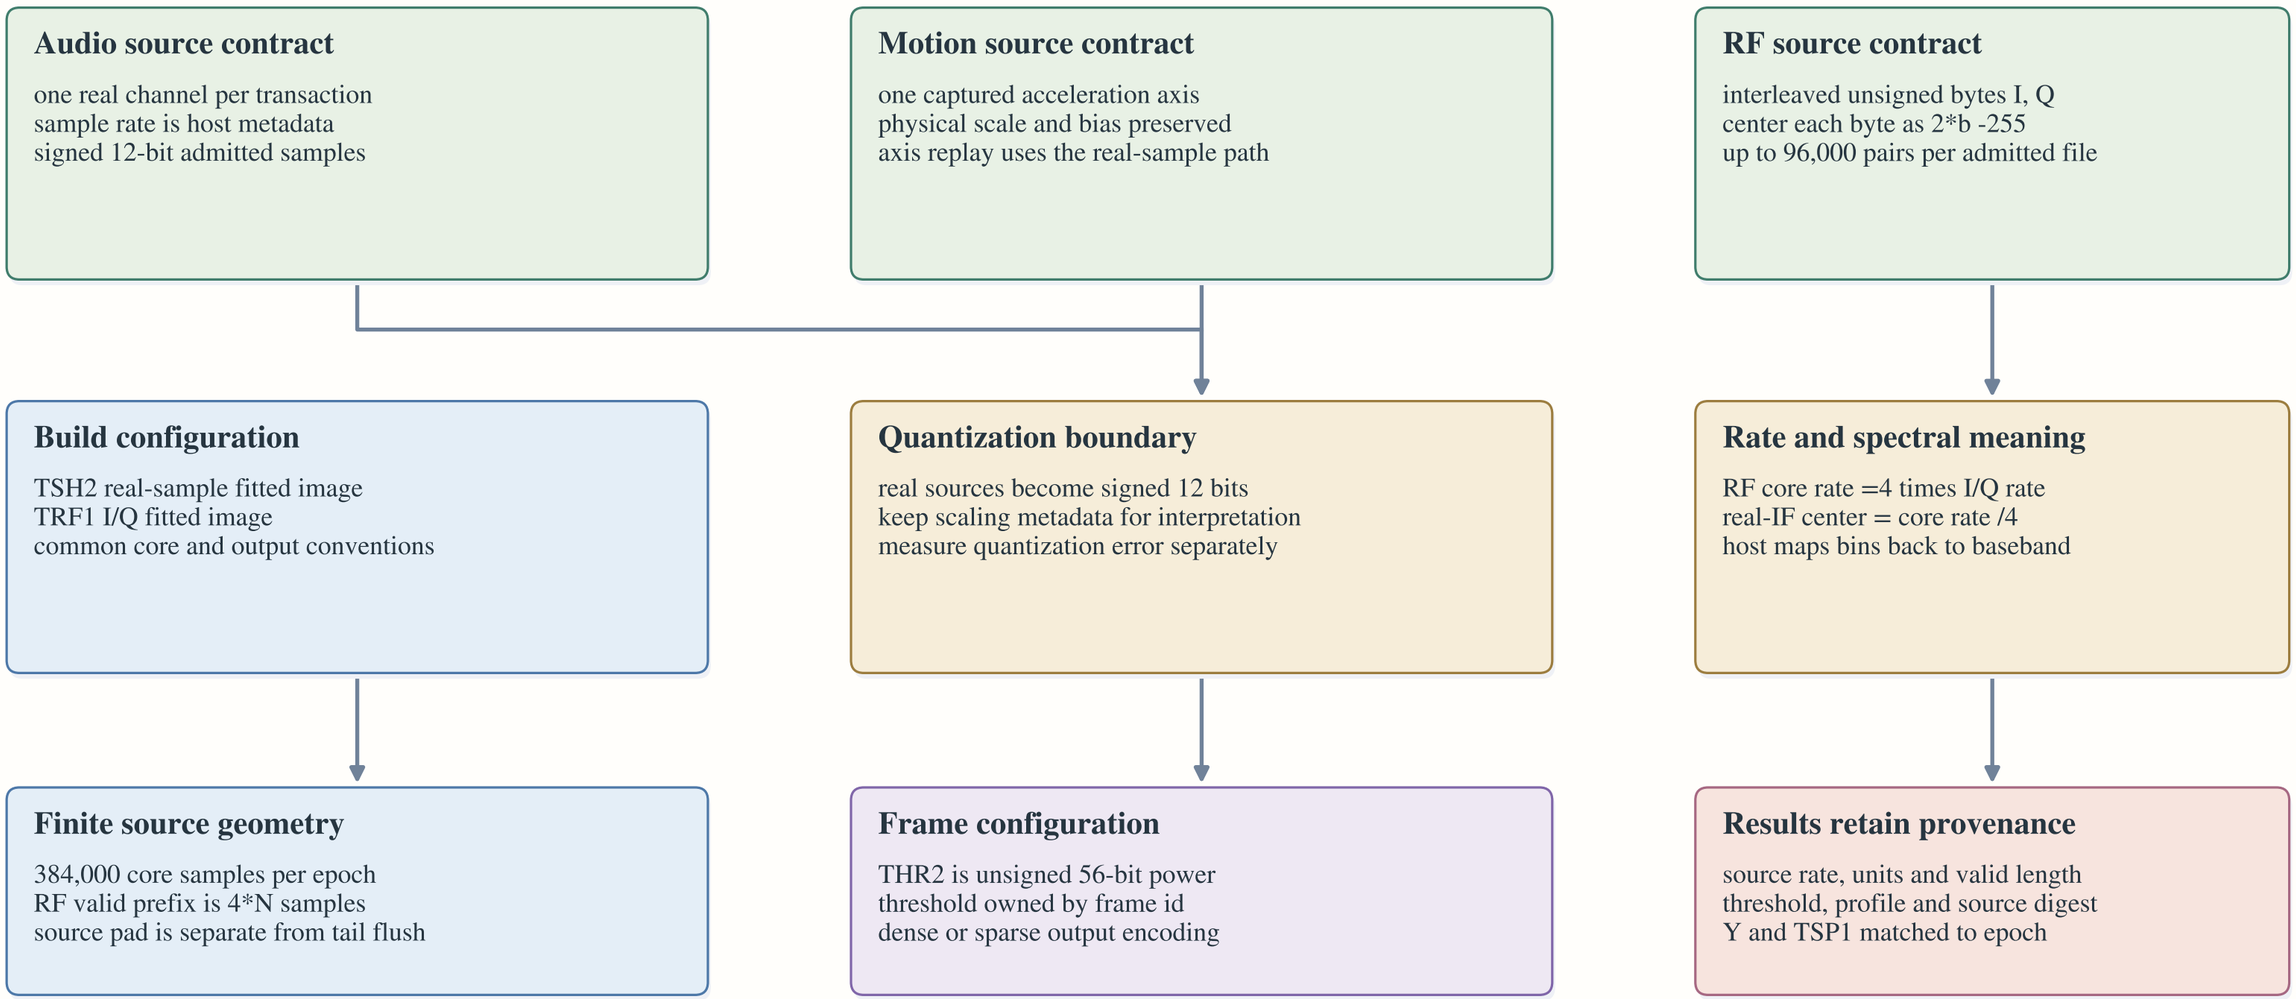

Design contract

The same core sample value can represent audio amplitude, scaled acceleration or real IF. Sample rate and scale are part of the result contract.

Signal input · DSP / control · Signal outputs · Control / host · Storage / platform · solid: data · dashed: control