TSP1 capture, checksum and packetization

Slot ownership, synchronous entry reads, record walking and byte packing turn observations into host records.

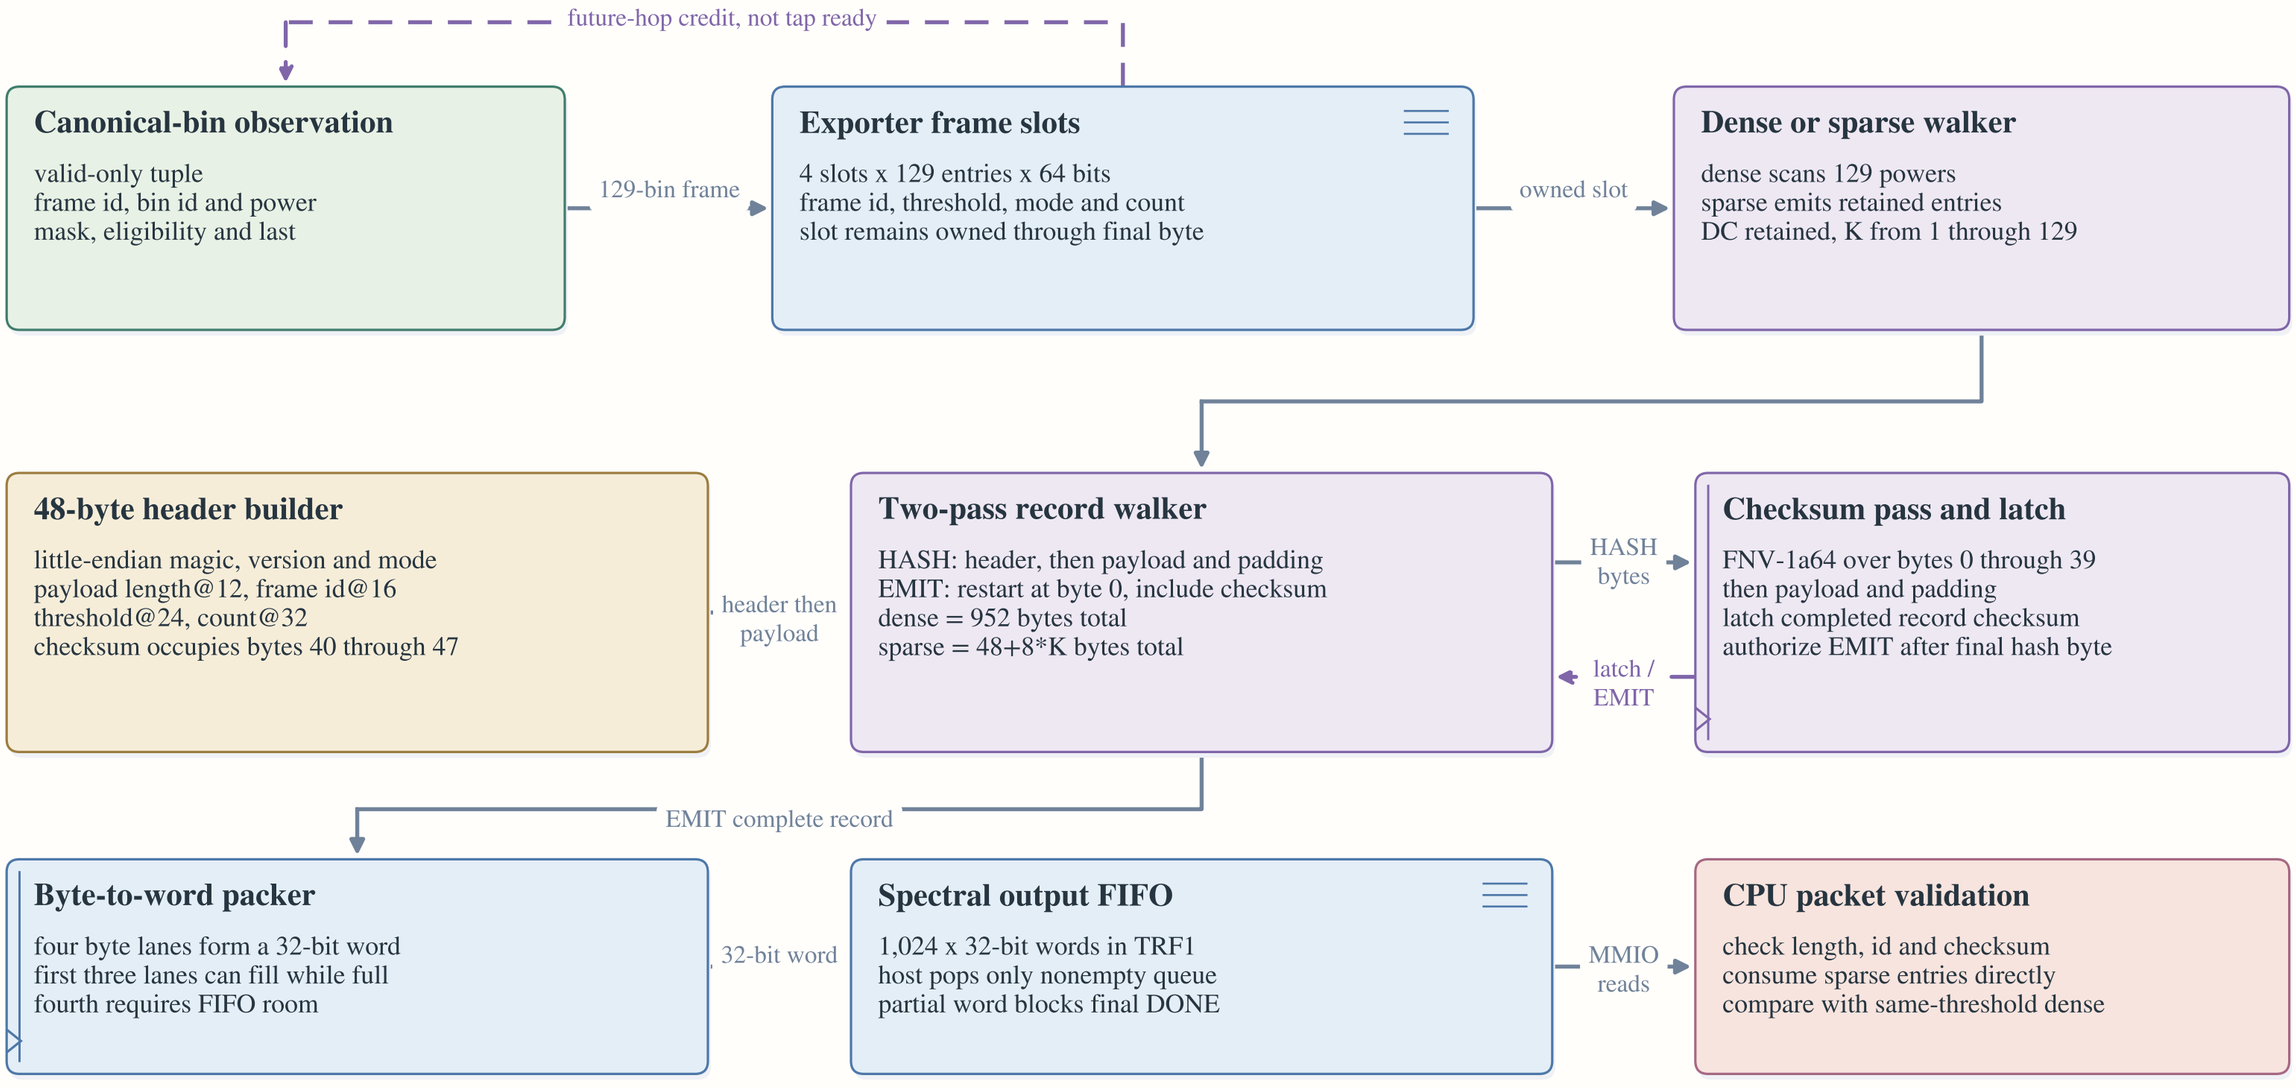

Design contract

Four exporter slots do not mean four admitted frames in the finite profile. Source hop credit limits triggered-but-not-emitted frames to one.

Signal input · DSP / control · Signal outputs · Control / host · Storage / platform · solid: data · dashed: control