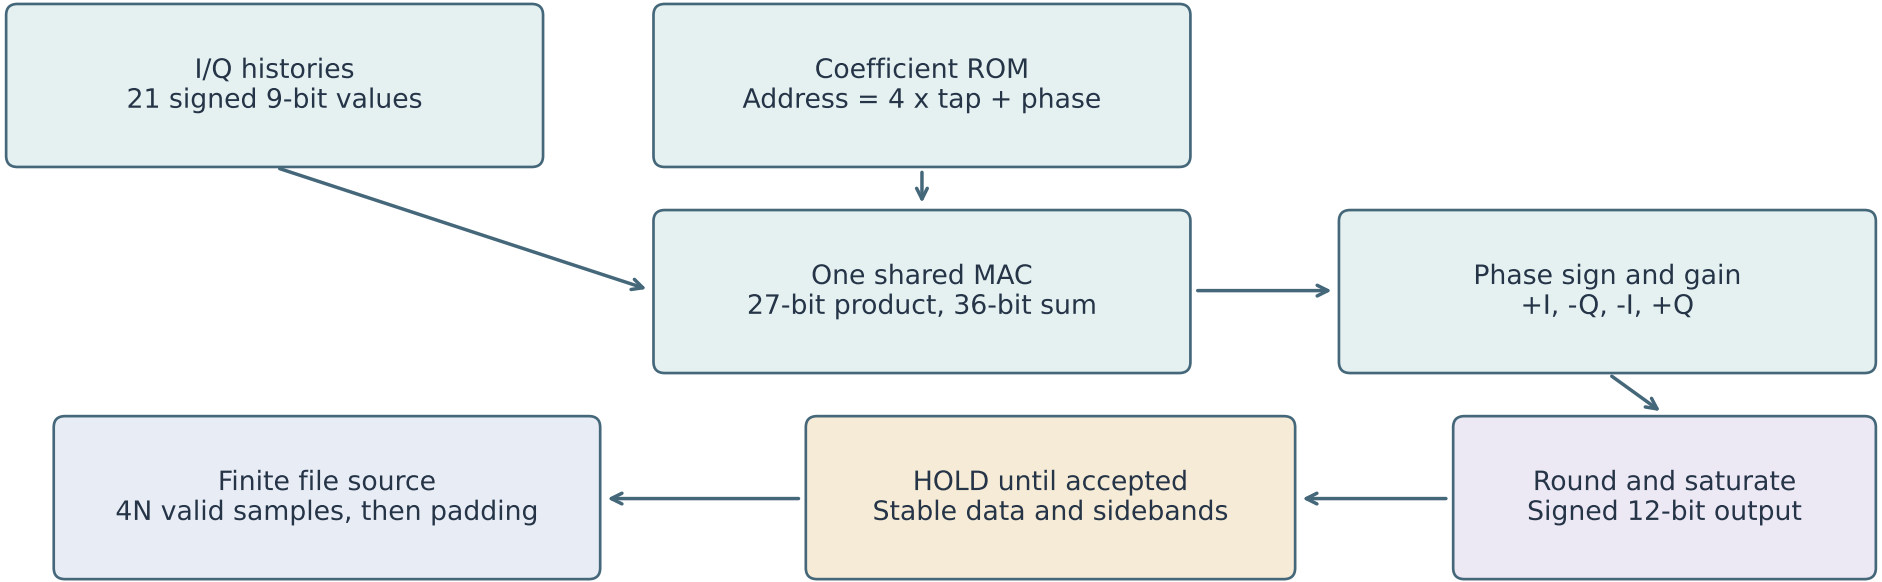
I/Q histories
21 signed 9-bit values
Coefficient ROM
Address = 4 x tap + phase
One shared MAC
27-bit product, 36-bit sum
Phase sign and gain
+I, -Q, -I, +Q
Round and saturate
Signed 12-bit output
HOLD until accepted
Stable data and sidebands
Finite file source
4N valid samples, then padding