


DB-B210-V1.1

Page	Title
01	COVER & SYS DIAGRAM
02	B210
03	LCD_USB_TP
04	AUDIO
05	POWER

Date	Update History	BY
2021-2-26	Create the first version.	Terry
2021-6-1	Add resistors for TF card POWER Exchange USB0/1 port	Terry

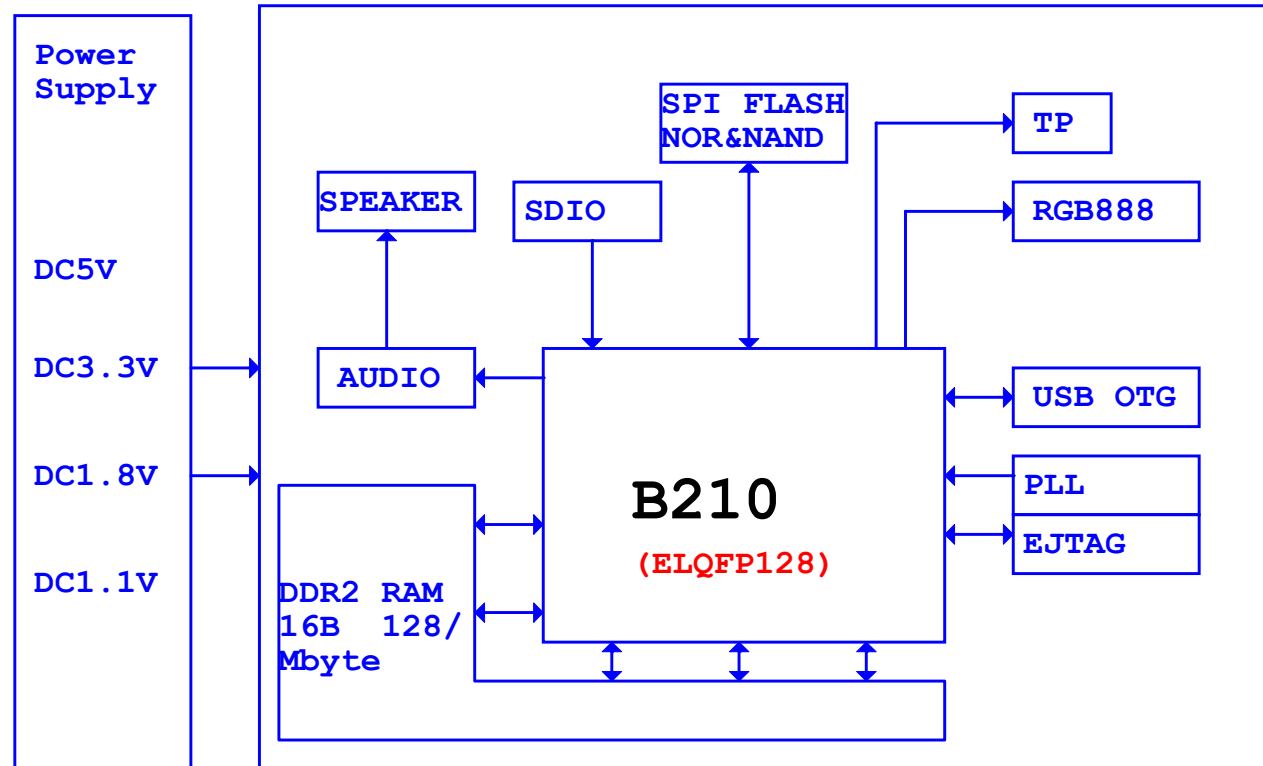

LCD

[2]	VOUT_R[0..7]	VOUT_R[0..7]
[2]	VOUT_G[0..7]	VOUT_G[0..7]
[2]	VOUT_B[0..7]	VOUT_B[0..7]
[2]	VOUT_PCLK	VOUT_PCLK
[2]	VOUT_HSYNC	VOUT_HSYNC
[2]	VOUT_VSYNC	VOUT_VSYNC
[2]	VOUT_DE	VOUT_DE

VOUT_PCLK	R38	33R	LCDCLK
VOUT_DE	R61	33R	LCDDE
VOUT_VSYNC	R66	33R	LCDVSYNC
VOUT_HSYNC	R67	33R	LCDHSYNC

VOUT_B7		BOUT7
VOUT_B6		BOUT6
VOUT_B5		BOUT5
VOUT_B4		BOUT4

VOUT_B3		BOUT3
VOUT_B2		BOUT2
VOUT_B1		BOUT1
VOUT_B0		BOUT0

VOUT_G7	R86	0R	GOUT7
VOUT_G6	R89	0R/NC	GOUT6
VOUT_G5	R20	100R	GOUT5
VOUT_G4	R19	100R	GOUT4


VOUT_G3	R18	100R	GOUT3
VOUT_G2	R17	100R	GOUT2
VOUT_G1	R16	100R	GOUT1
VOUT_G0	R87	0R	GOUT0

VOUT_R7		ROUT7
VOUT_R6		ROUT6
VOUT_R5		ROUT5
VOUT_R4		ROUT4

VOUT_R3		ROUT3
VOUT_R2		ROUT2
VOUT_R1		ROUT1
VOUT_R0		ROUT0


IF G0&B0 used for GPIO, Than pull low.

[3]	I2C1_SCL	I2C1_SCL
[3]	I2C1_SDA	I2C1_SDA
[3]	TP_INT	TP_INT

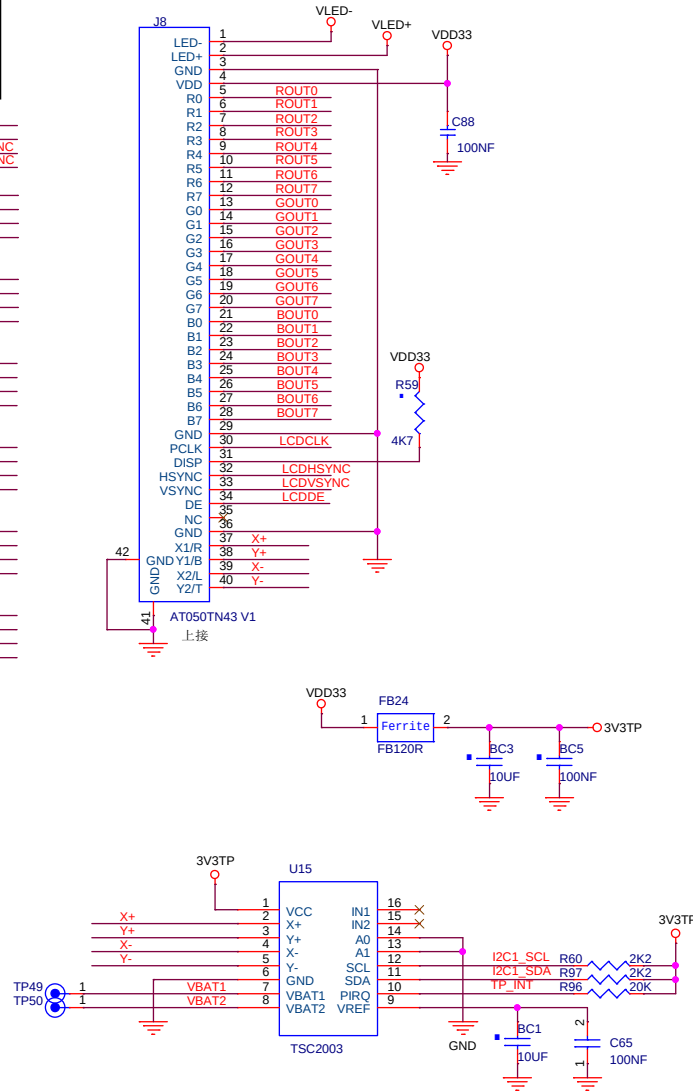


USB0/1

[3]	USB0PP	USB0PP
[3]	USB0PN	USB0PN
[3]	USB1PP	USB1PP
[3]	USB1PN	USB1PN

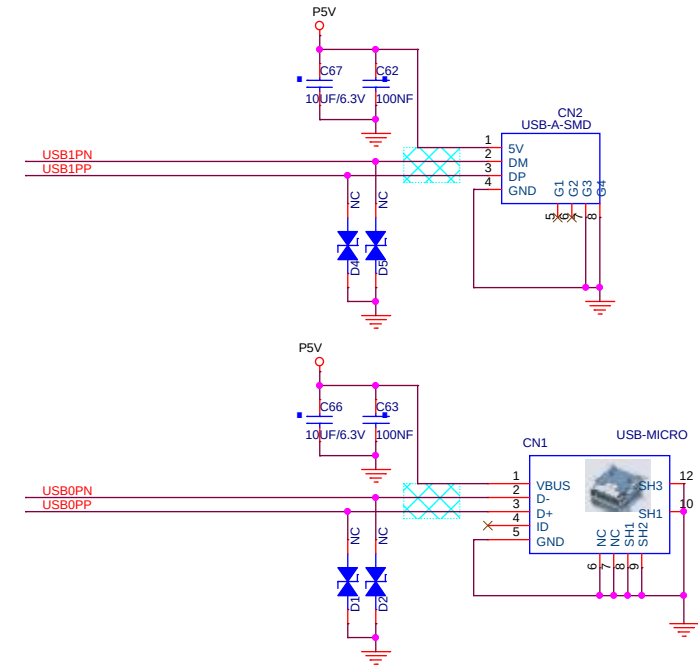


AUDIO


[2] LO_PWMLP
[2] LO_PWMRP

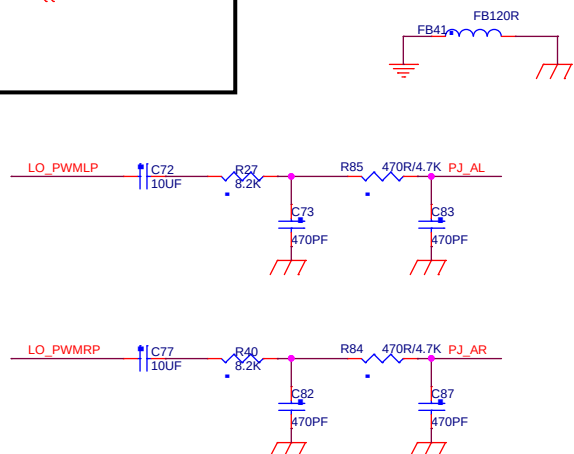

PHONEJACK

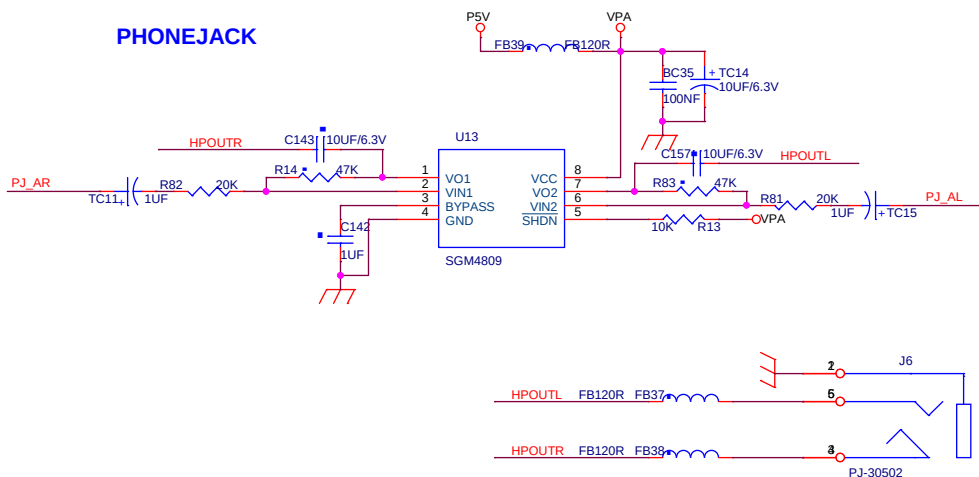

SPEAKER

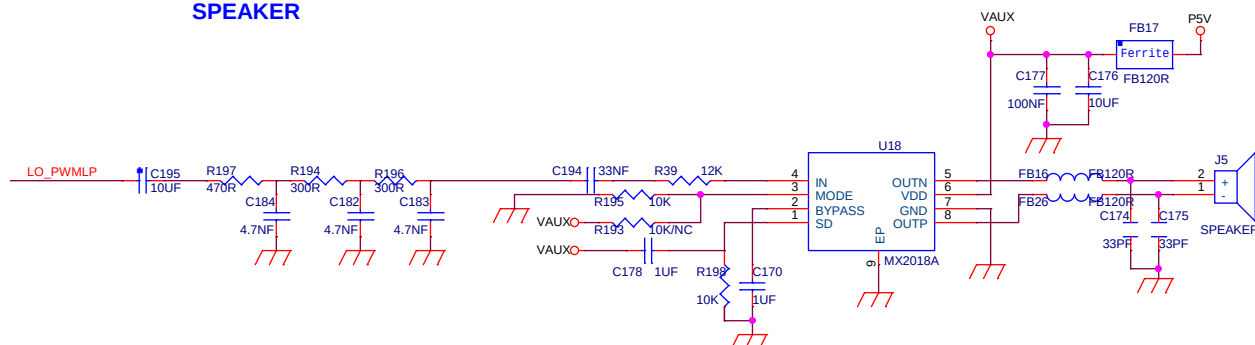

Zhuhai Hi-Chip Technology Co.,Ltd.


Size
B

Document Number
04 AUDIO


Rev
V1.1

Date: Wednesday, June 02, 2021 Sheet 4 of 5


VDDCORE 1.15V

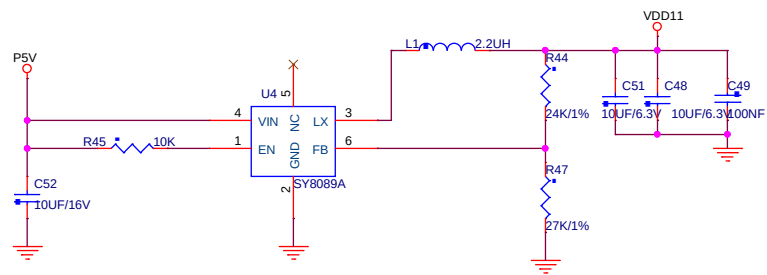


DC5V




VDDO 1.8V

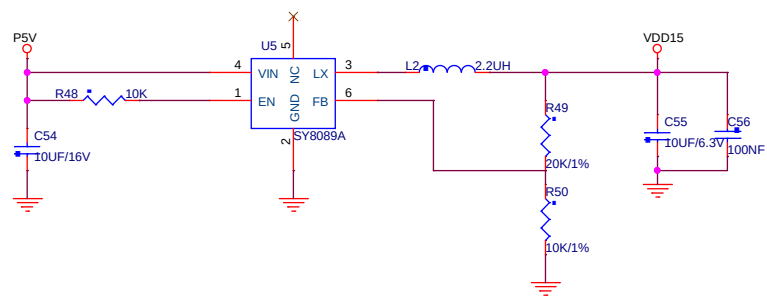

BACKLIGHT

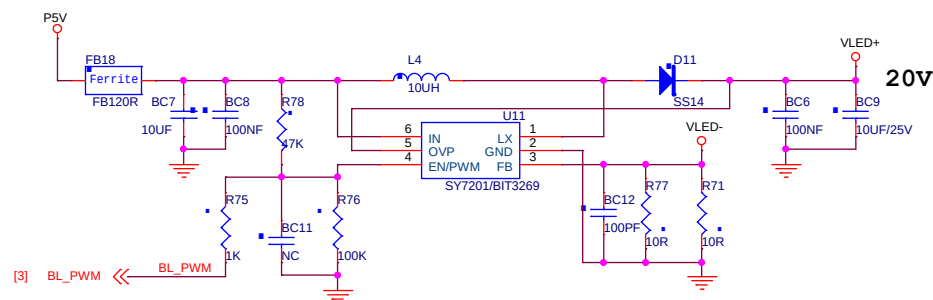

VDD33 3.3V

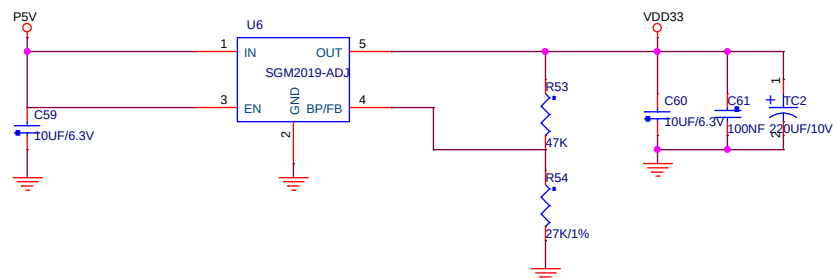

MASK1 MASK2
SMD SMD

TP47 Test Pin
TP48 Test Pin