SUBMITTAL DATA SHEET

innovair

Series Name: Corvus Inverter Package Units
Model Number: PXV36H2A

Package Unit Heat Pump	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:

AHRI CERTIFIED www.ahridirectory.org

OUTDOOR SPECIFICATION		
Compressor Type		TWIN ROTARY
Compressor Model		KTF310D43UMT
Refrigerant		R32
Refrigerant Oil Charge(mL)		1000
Refrigerant Oil		VG74
Outdoor Air Flow (Max) (CFM)		3412.0
Outdoor Noise Level (dBA)		76
Dimension (W×D×H)	inch	53 x 43 ¼ x 31 ¼
	mm	1295 x 1100 x 795
Package (W×D×H)	inch	51 x 33 ¾ x 43 ½
	mm	1300 x 1105 x 856
Net/Gross Weight	lbs	405 / 412
	kg	184 / 187

ELECTRICAL	
Power Supply	208~230 / 1 / 60
Indoor MCA	-
Indoor MOP	-
External Static Pressure In.W.C. (Pa)	0-0.8 (0-200)
Outdoor MCA	24
Outdoor MOP	0
Communication Wiring	-
Compressor Current (A)	5.38
Outdoor Fan Motor RLA	
Outdoor Fan Motor W	200
Indoor Fan Motor RLA	3
Indoor Fan Motor W	560
System Power Input @ Cooling (W)	2180 / 3390
System Power Input @ Heating (W)	4500 / 5380
MCA: Min. circuit amps (A)	**MOCP: Max. over current protection (A)**
RLA: Rated load amps (A)	**W: Fan motor rated output (W)**

PIPING	
Throttle type(Indoor)	EXV
Throttle type(Outdoor)	EXV
Liquid Size	-
Gas Size	-
Max. Piping Length(ft/m)	-
Max. Height Difference(ft/m)	-
Max. Pre-charged Length(ft/m)	-
Refrigerant Pre-charged Amount(oz/kg)	77.6 (2.2)
Additional Charge of Refrigerant((oz/ft)/(g/m))	
Connection Method	

EFFICIENCY			
Cooling		Heating	
SEER2	18.5	HSPF2-4	8.5
EER2	10.6	COP 5°F	2.0

PERFORMANCE of Cooling	
Cooling (Btu/hr)	
Rated Capacity	36000
Min/Max Capacity	14000~45000
Moisture Removal(L/h)	4.22
Standard Operating Range(°F/°C)	50~125 (10~52)
Rated Cooling Conditions:	Indoor: 80°F DB/67°F WB
	Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating	
Heating (Btu/hr)	
1. @ 47°F Rated	36000
2. @ 47°F Min/Max Capacity	11600~53000
3. @ 17°F Rated	25000
4. @ 5°F Rated: Capacity	26500
5. @ 5°F Max: Capacity	26500
Standard Operating Range(°F/°C)	-4~75 (-20~24)
1. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB
	Outdoor: 47°F DB/43°F WB
2. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB
	Outdoor: 17°F DB/15°F WB
3. Heating Conditions, Compressor Operating at Max. Frequency	Indoor: 70°F DB/60°F WB
	Outdoor: 5°F DB/5°F WB

Unit Dimension

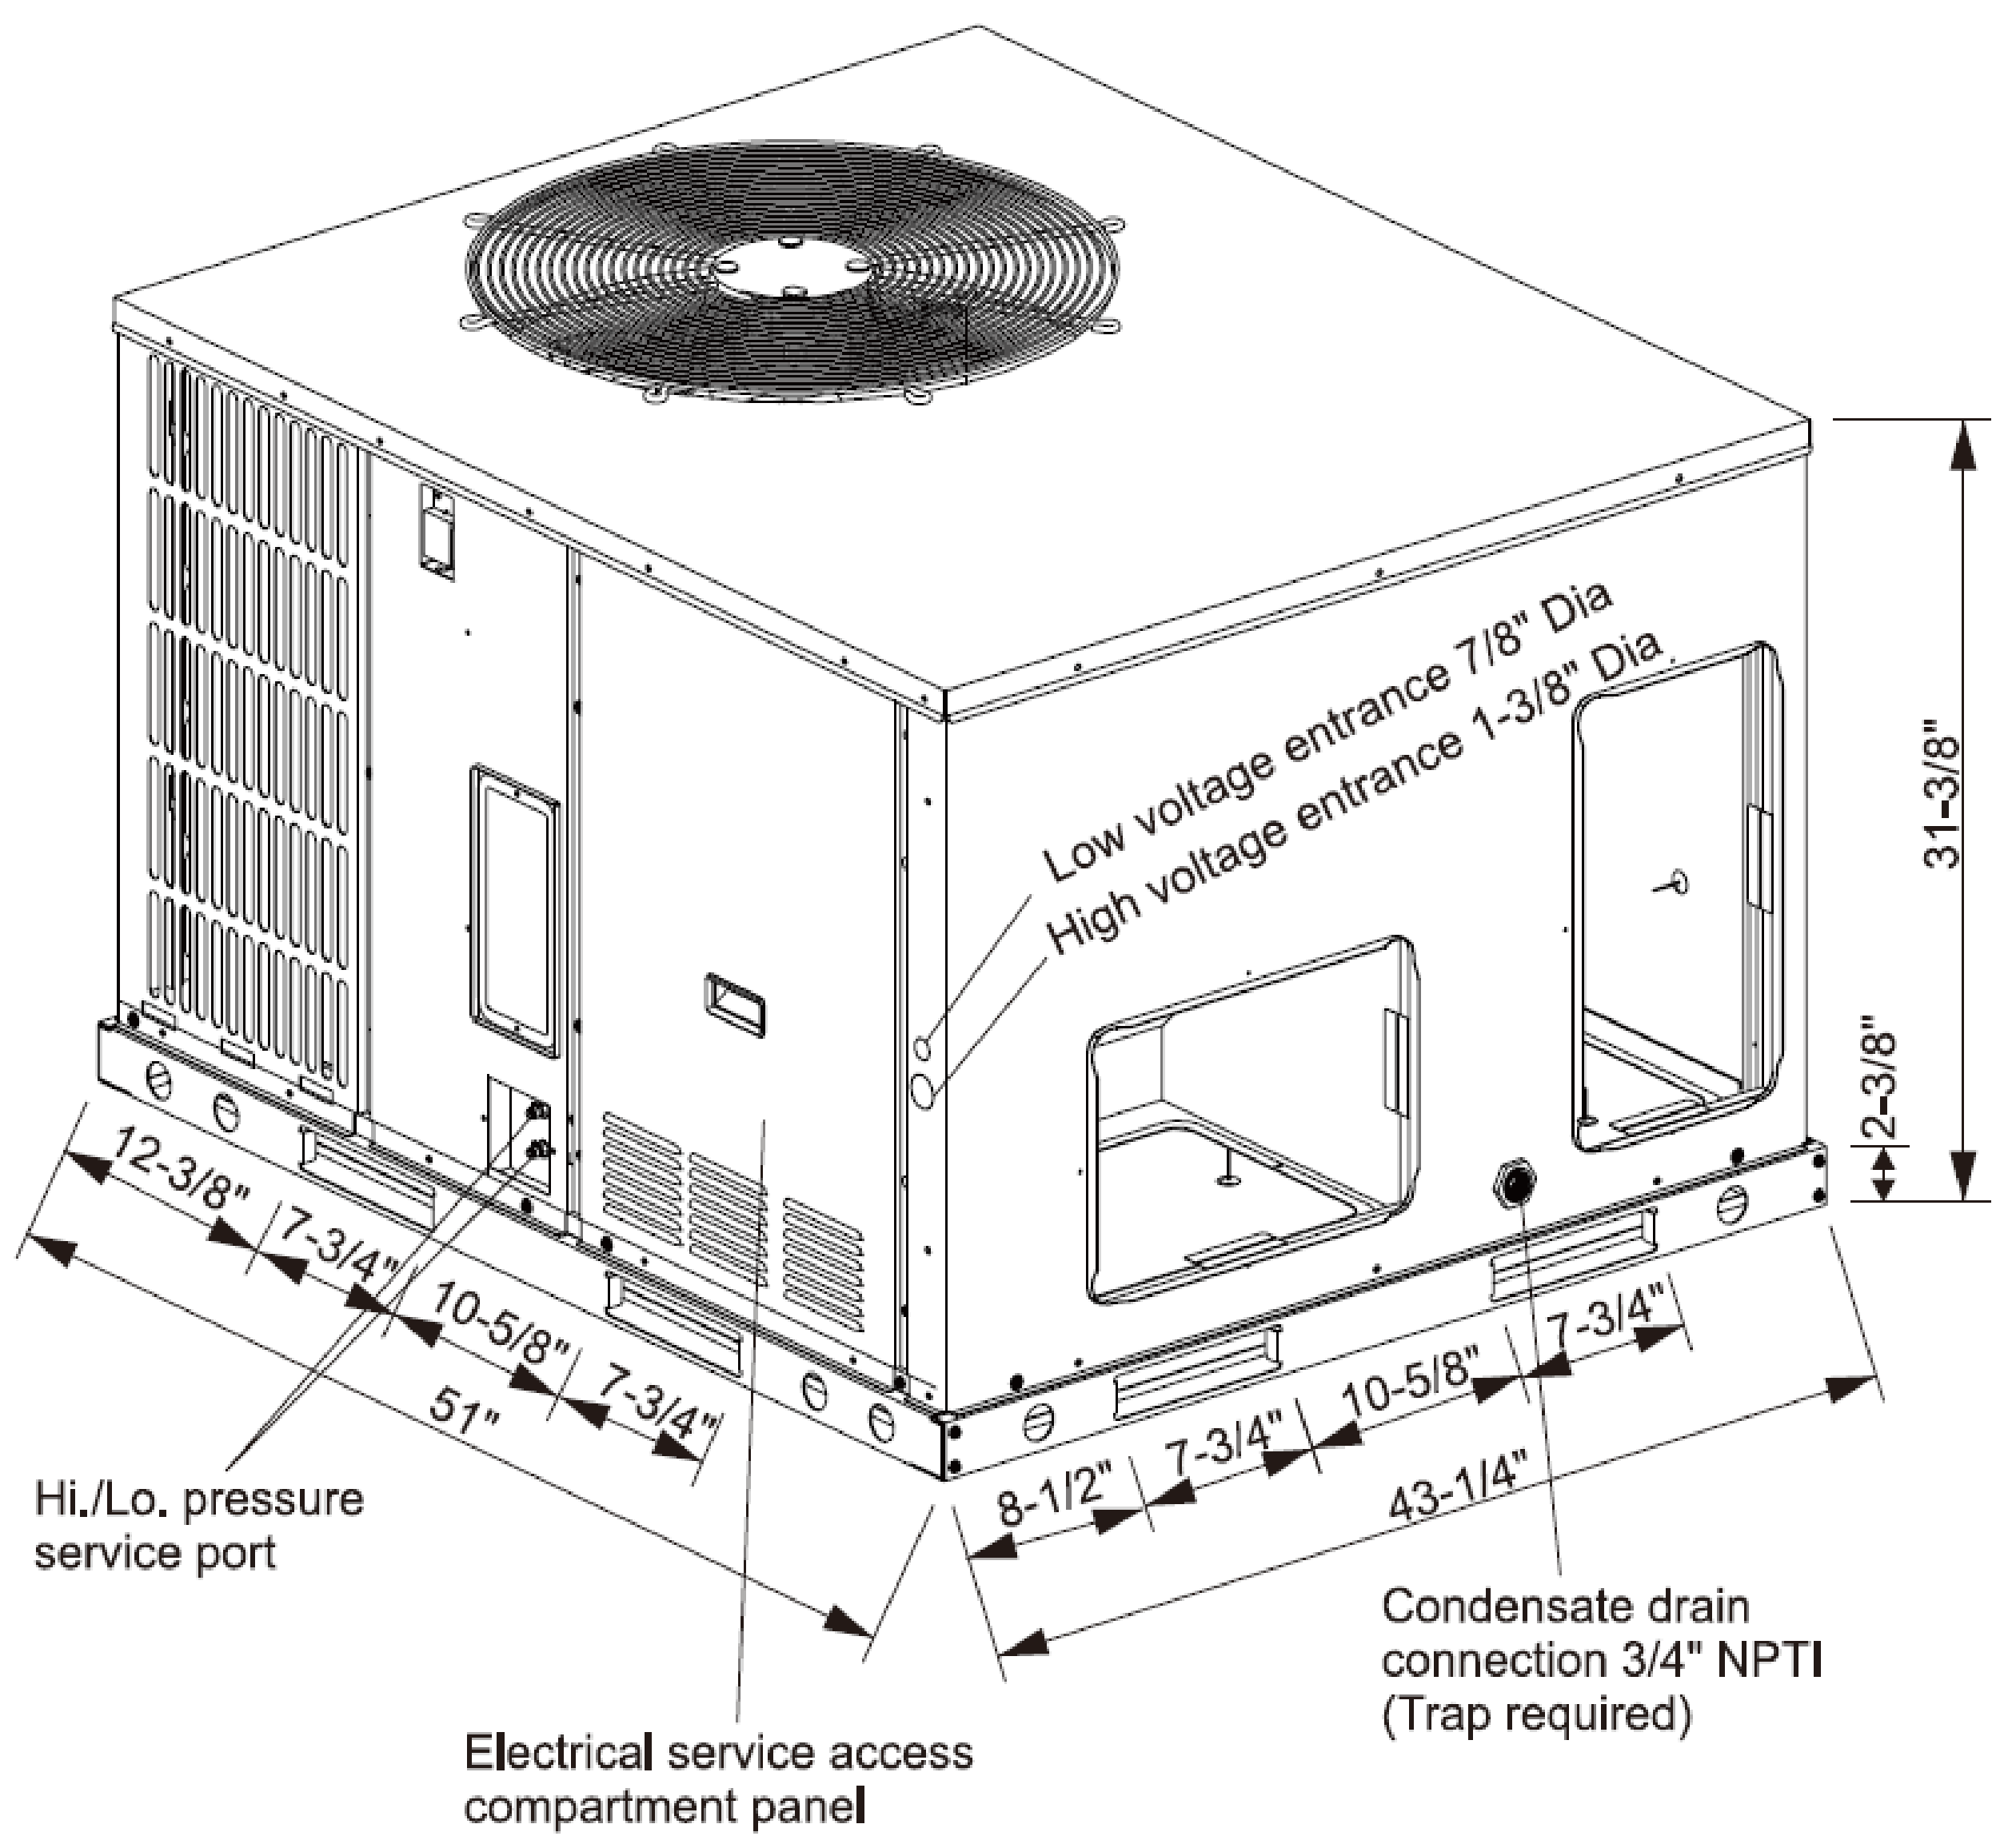

Dimensions - Back and Bottom

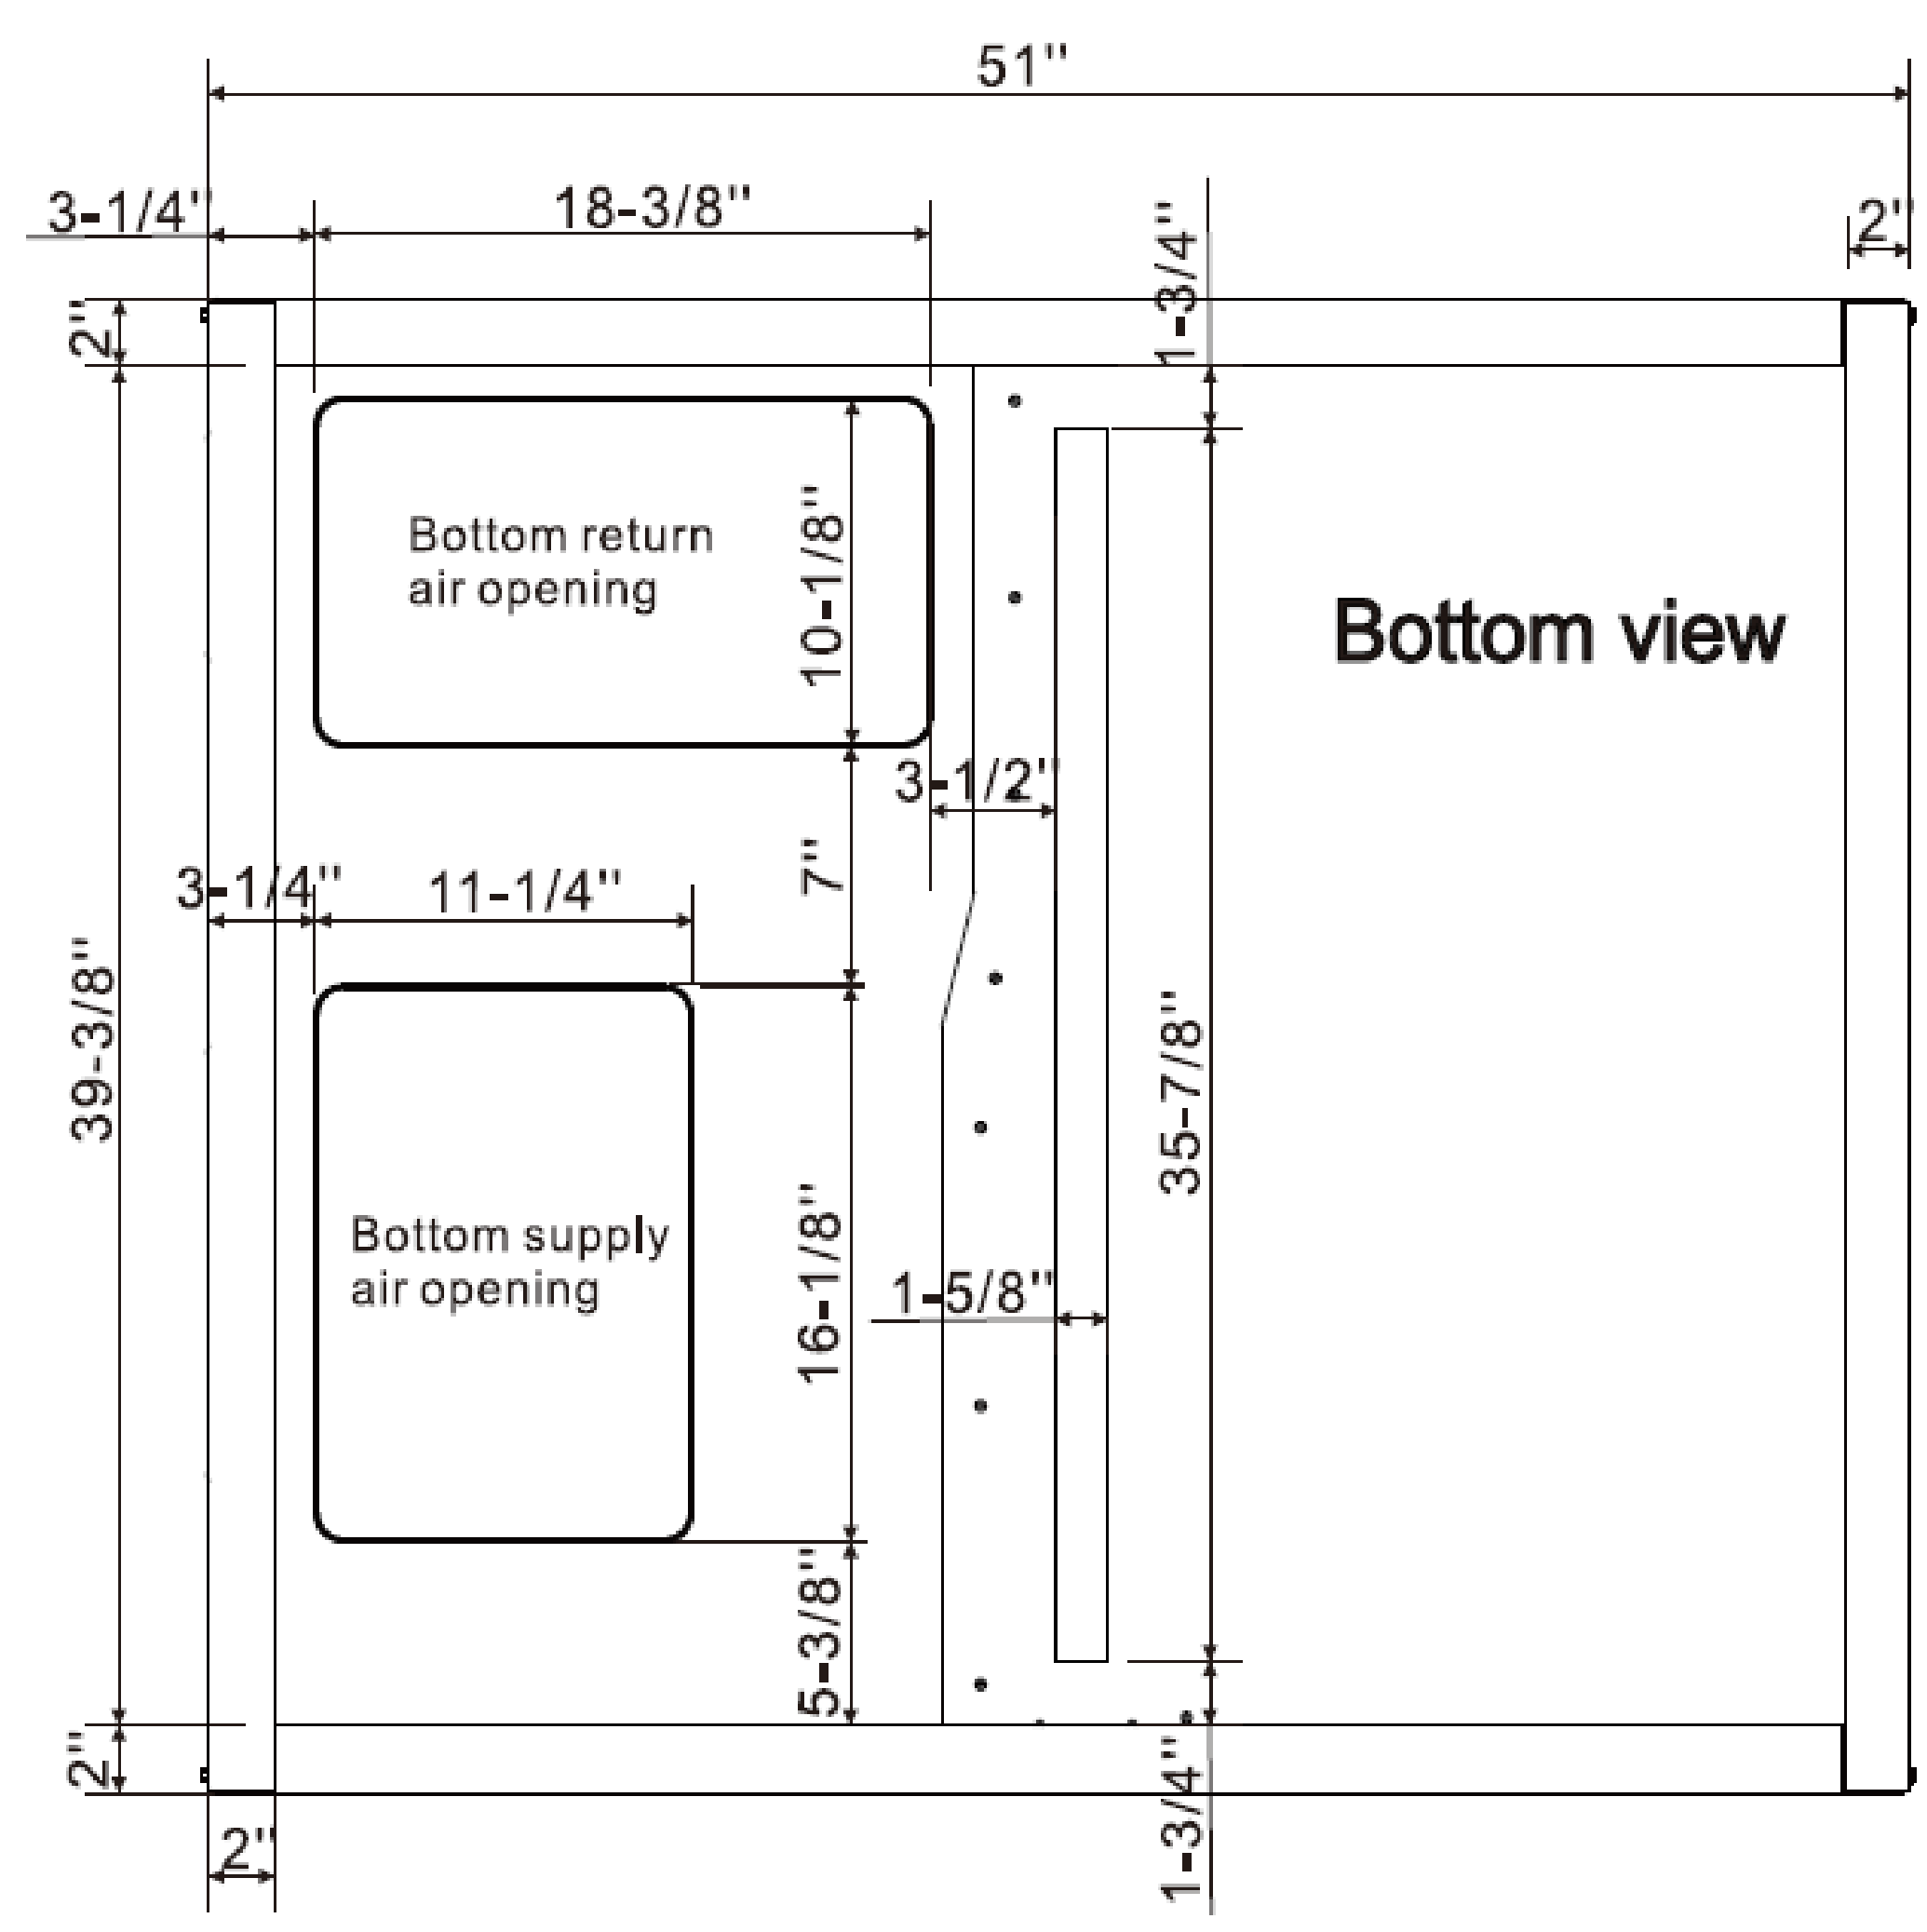

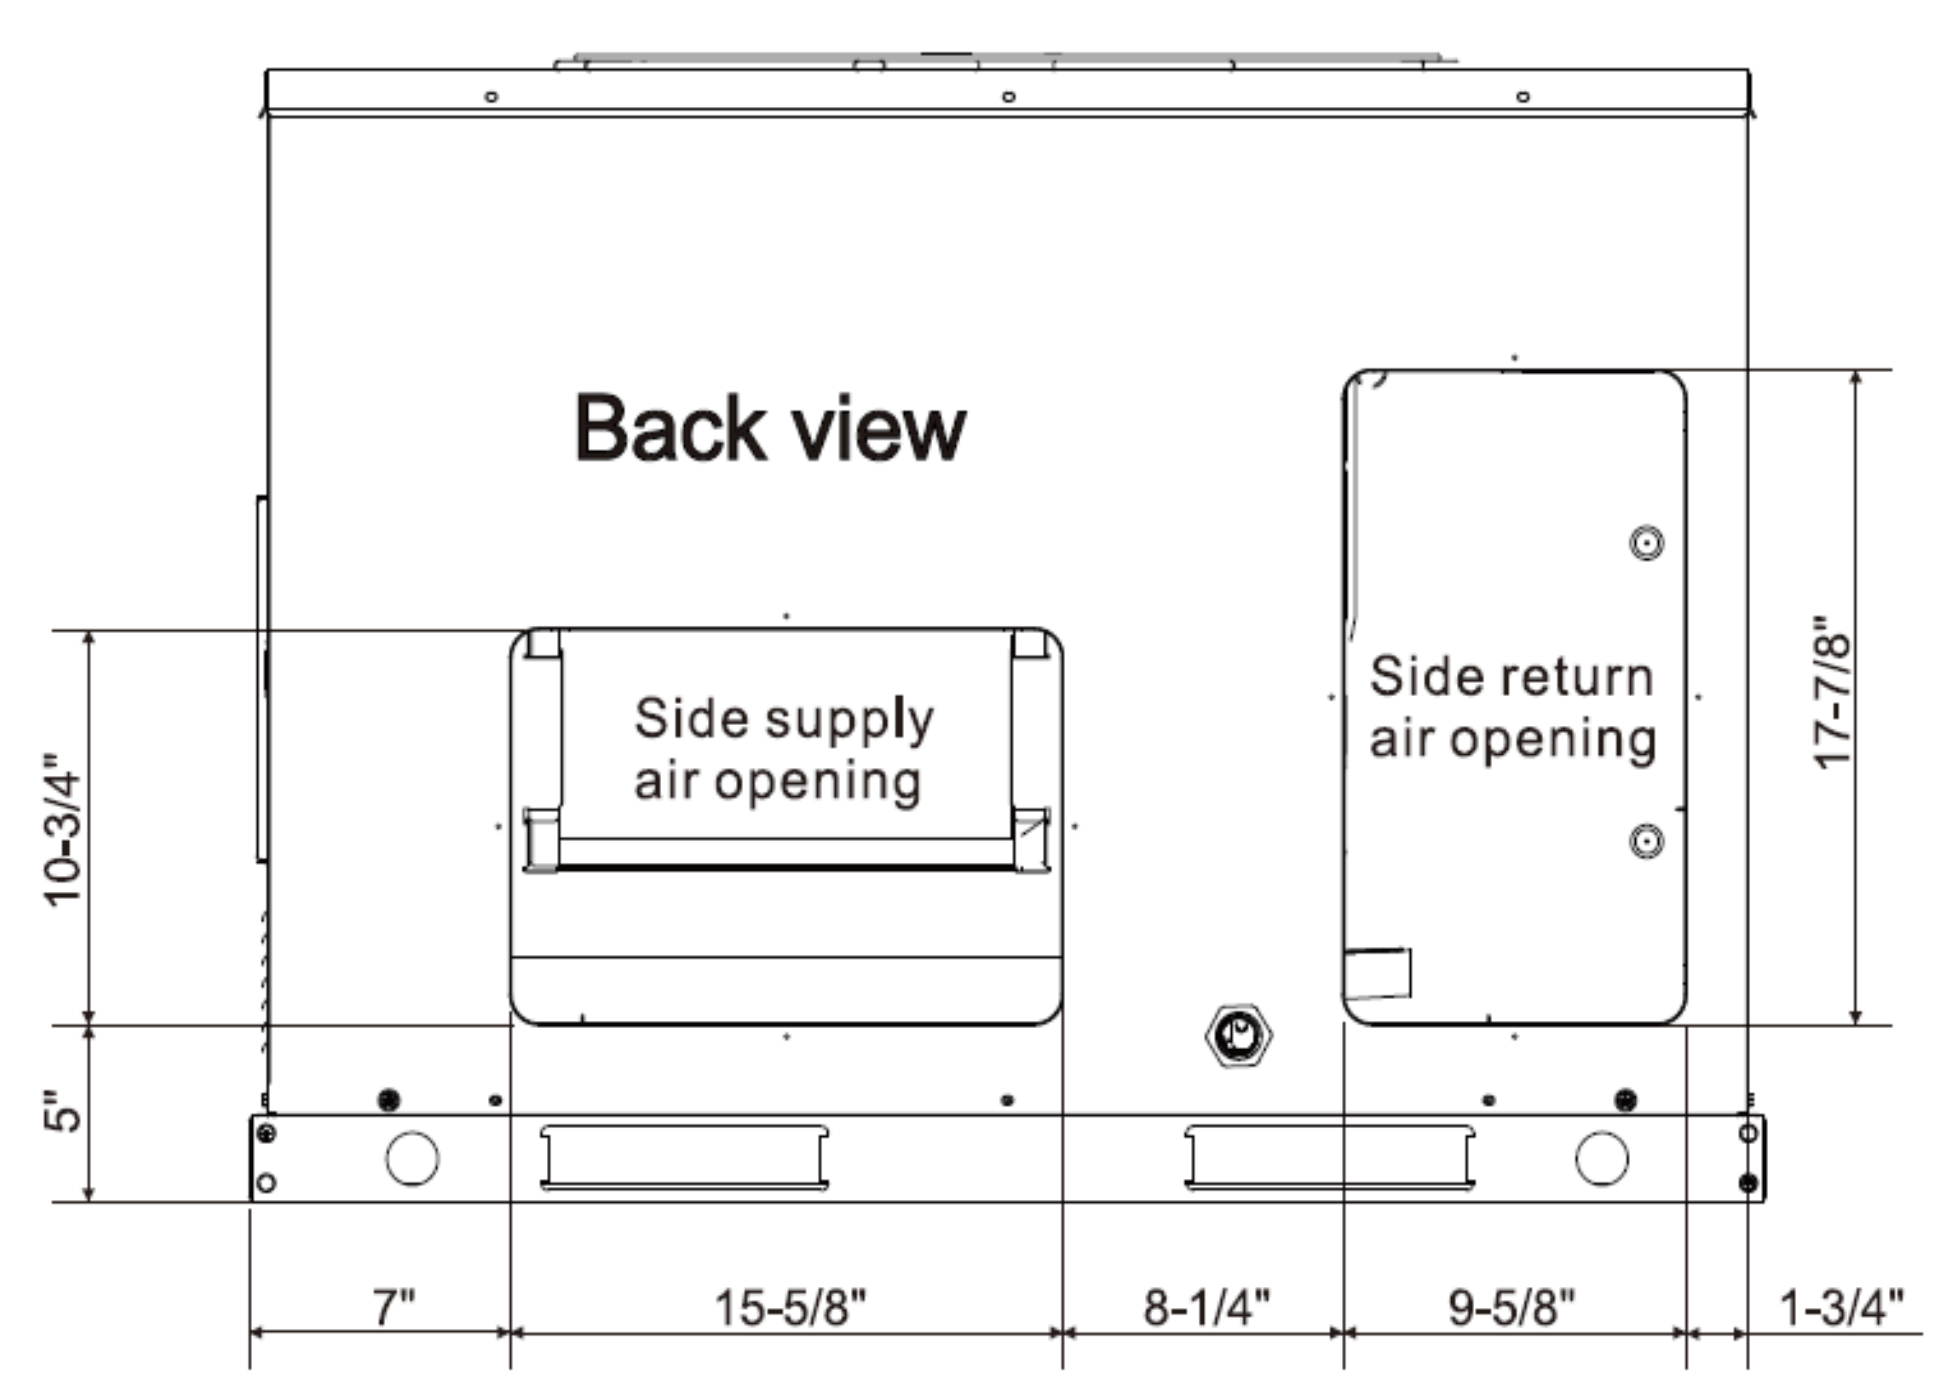

Dimensions - Left and Top

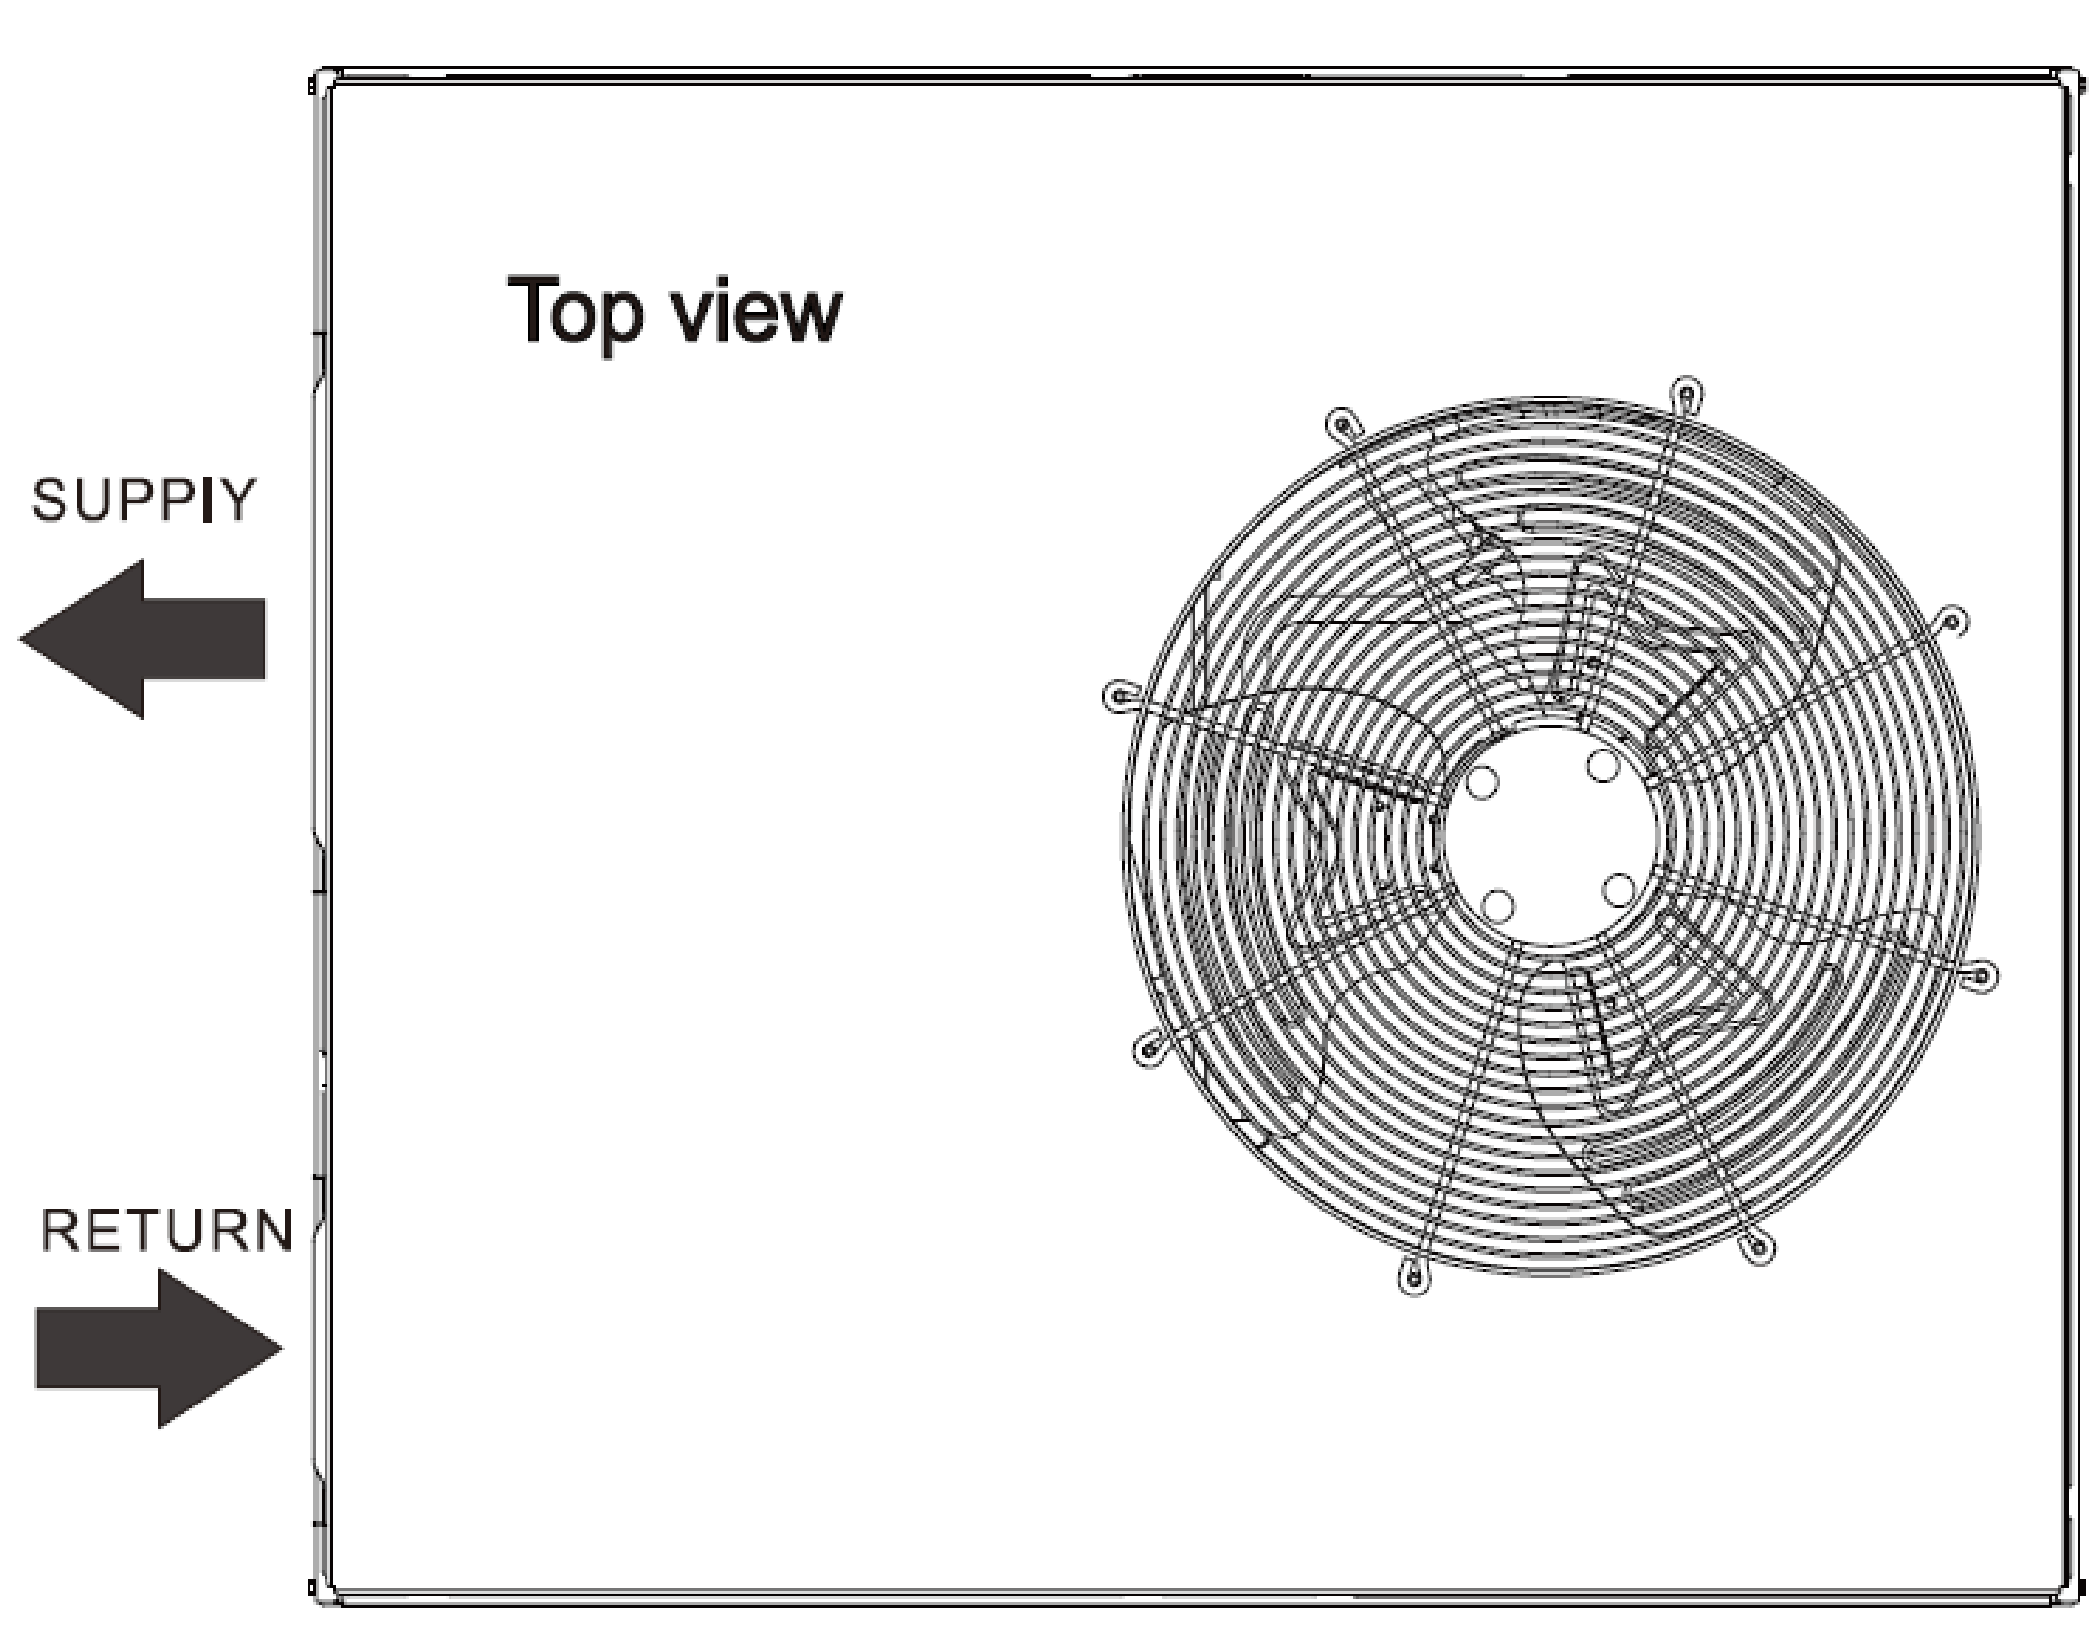

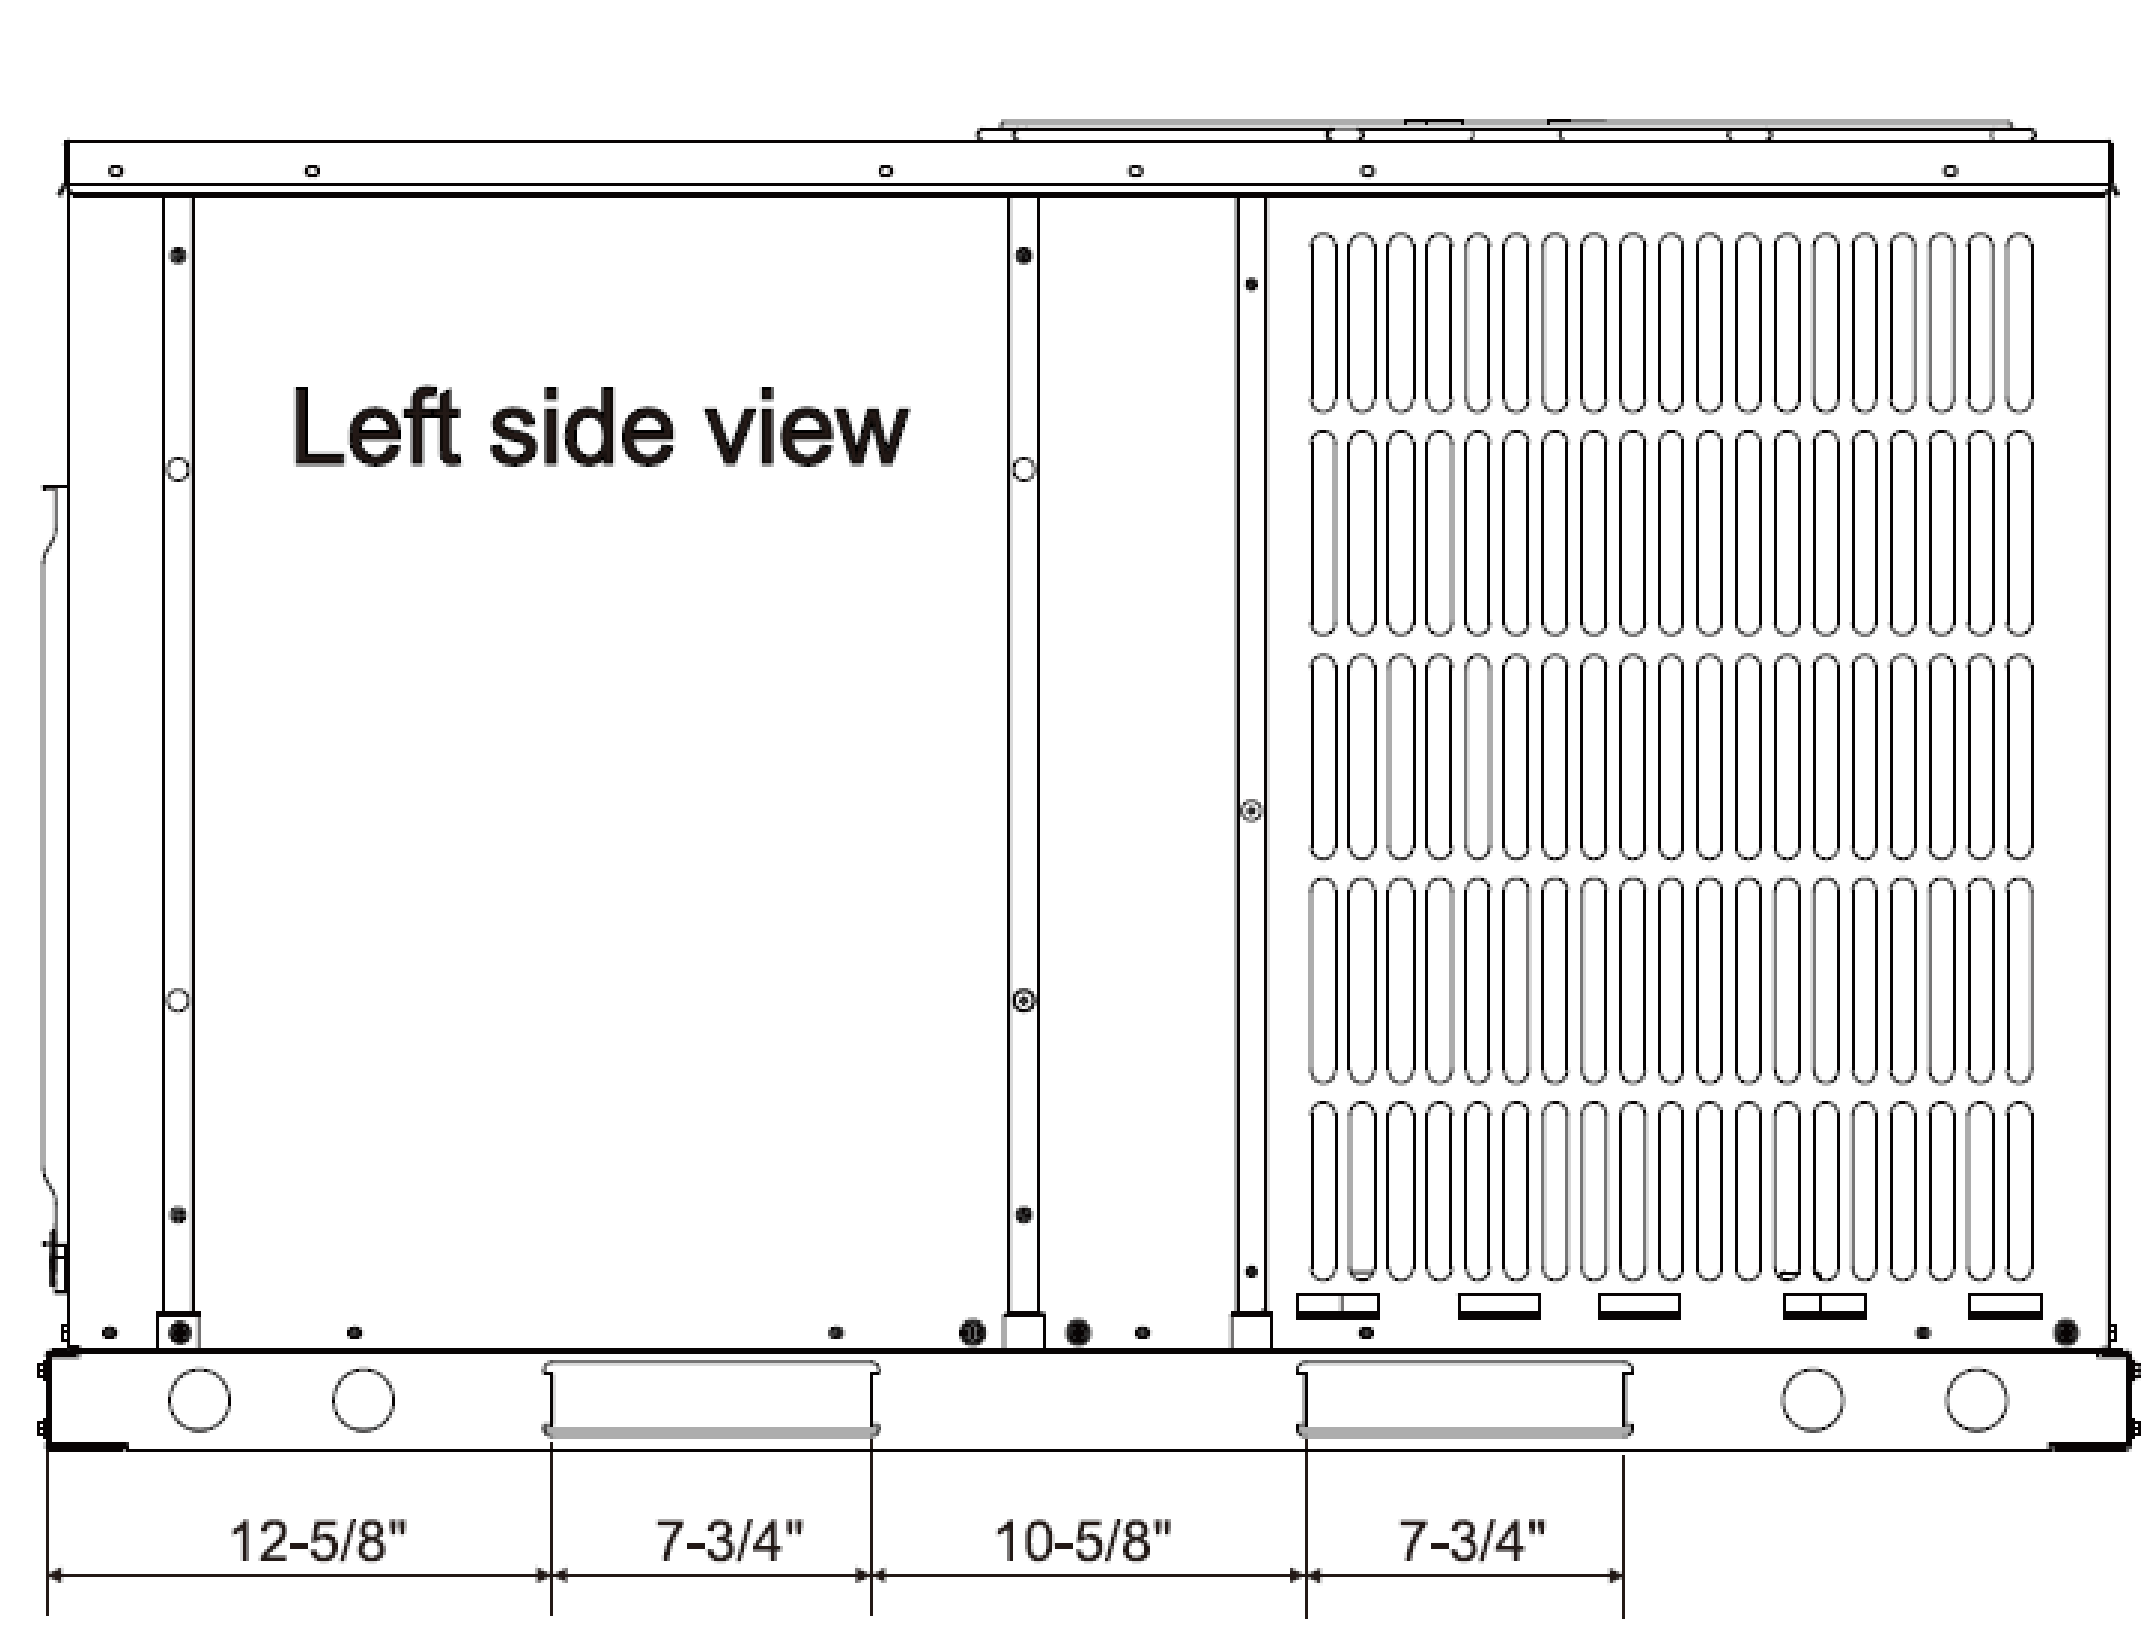

Performance Chart

Heating Mode

Airflow (CFM)	ID ℉	OD ℉	75	65	55	47	35	25	15	5	-4
1000	60	TC	42.4	42.4	42.3	40.7	34.6	32.2	27.0	25.0	21.8
		kW	2.46	2.63	3.09	3.36	3.12	3.34	3.10	2.99	2.84
	70	TC	32.8	32.6	32.7	32.3	32.3	31.6	26.5	24.6	21.4
		kW	1.84	1.94	2.28	2.66	3.19	3.63	3.30	3.21	3.03
	75	TC	27.6	27.5	27.5	27.5	27.1	27.1	25.0	23.1	19.6
		kW	1.53	1.65	1.92	2.27	2.64	3.09	3.45	3.35	3.16
	80	TC	22.7	22.7	22.7	22.6	22.4	22.2	22.2	22.2	19.2
		kW	1.27	1.35	1.59	1.85	2.20	2.48	3.11	3.39	3.29
1200	60	TC	47.4	47.4	46.0	41.2	35.1	32.7	27.5	25.6	22.2
		kW	2.91	3.08	3.42	3.29	3.09	3.32	3.07	2.99	2.85
	70	TC	36.7	36.5	36.2	36.0	34.2	32.0	26.9	24.9	21.7
		kW	2.12	2.27	2.61	3.00	3.37	3.59	3.30	3.21	3.06
	75	TC	30.9	30.8	30.8	30.3	30.4	30.4	25.4	23.4	19.9
		kW	1.78	1.89	2.22	2.53	3.02	3.55	3.44	3.34	3.17
	80	TC	25.3	25.3	25.3	25.2	24.9	24.8	24.9	23.1	19.6
		kW	1.47	1.56	1.82	2.10	2.45	2.84	3.56	3.48	3.29
1400	60	TC	52.8	51.9	46.9	41.9	35.6	33.2	27.9	26.0	22.7
		kW	3.42	3.50	3.39	3.29	3.11	3.34	3.12	3.05	2.92
	70	TC	40.6	40.4	40.4	40.3	34.8	32.5	27.4	25.4	22.1
		kW	2.44	2.59	3.05	3.54	3.38	3.61	3.35	3.27	3.12
	75	TC	34.6	34.4	34.0	33.9	33.9	32.1	25.9	23.8	20.4
		kW	2.08	2.20	2.50	2.93	3.48	3.77	3.48	3.39	3.24
	80	TC	28.4	28.3	28.3	28.2	27.8	27.8	25.6	23.5	20.0
		kW	1.73	1.83	2.10	2.45	2.83	3.28	3.62	3.53	3.35

Cooling Mode

Airflow (CMF)	Outdoor DB	IWB (°F)	59				63				67				71		
		IDB (°F)	70	75	80	85	70	75	80	85	70	75	80	85	75	80	85
1000	50	TC	18.4	18.6	19.0	19.2	19.0	19.2	19.4	19.6	20.3	20.5	20.7	20.8	24.7	24.9	25.1
		S/T	0.99	1.00	1.00	1.00	0.61	0.83	1.00	1.00	0.39	0.57	0.73	0.90	0.39	0.53	0.67
		kW	0.88	0.89	0.89	0.89	0.89	0.91	0.91	0.92	0.92	0.93	0.94	0.95	1.16	1.17	1.19
	65	TC	30.7	31.0	31.6	32.0	31.6	32.0	32.3	32.7	33.8	34.1	34.4	34.6	41.2	41.5	41.8
		S/T	0.99	1.00	1.00	1.00	0.61	0.83	1.00	1.00	0.39	0.57	0.73	0.90	0.39	0.53	0.67
		kW	1.83	1.85	1.86	1.86	1.86	1.89	1.90	1.92	1.92	1.93	1.96	1.98	2.42	2.45	2.48
	75	TC	30.7	31.1	31.7	32.0	31.7	32.0	32.5	32.8	33.9	34.2	34.5	34.7	40.8	41.1	41.4
		S/T	1.00	1.00	0.99	1.00	0.62	0.83	1.00	1.00	0.39	0.56	0.73	0.90	0.39	0.53	0.67
		kW	2.03	2.05	2.08	2.08	2.08	2.10	2.12	2.14	2.12	2.16	2.18	2.21	2.67	2.69	2.72
	85	TC	30.3	30.6	31.2	31.6	31.2	31.6	31.9	32.2	33.4	33.7	34.0	34.2	40.1	40.4	40.6
		S/T	1.00	1.00	1.00	1.00	0.62	0.84	1.00	1.00	0.39	0.57	0.74	0.91	0.39	0.53	0.67
		kW	2.29	2.31	2.34	2.34	2.34	2.36	2.39	2.41	2.41	2.43	2.46	2.48	3.03	3.06	3.09
	95	TC	29.7	30.1	30.7	31.1	30.7	31.1	31.4	31.7	32.9	33.2	33.4	33.7	39.1	39.4	39.7
		S/T	1.00	1.00	1.00	1.00	0.62	0.84	1.00	1.00	0.39	0.57	0.74	0.92	0.39	0.53	0.68
		kW	2.75	2.78	2.81	2.81	2.81	2.84	2.87	2.90	2.91	2.93	2.96	2.99	3.61	3.63	3.67
	105	TC	29.1	29.5	30.2	30.5	30.2	30.5	30.8	31.1	32.2	32.6	32.8	33.0	37.8	37.9	38.1
		S/T	0.99	1.00	1.00	1.00	0.62	0.84	1.00	1.00	0.39	0.57	0.75	0.93	0.39	0.54	0.69
		kW	3.28	3.31	3.35	3.35	3.35	3.38	3.42	3.45	3.45	3.49	3.51	3.55	4.18	4.19	4.20
	115	TC	26.1	26.4	27.0	27.2	27.0	27.2	27.5	27.9	29.0	29.2	29.3	29.5	31.4	31.6	31.7
		S/T	1.00	1.00	1.00	1.00	0.62	0.85	1.00	1.00	0.40	0.60	0.79	0.99	0.39	0.58	0.76
		kW	3.34	3.37	3.41	3.41	3.41	3.45	3.49	3.53	3.55	3.57	3.60	3.61	3.72	3.74	3.75
	125	TC	22.2	22.4	23.0	23.1	23.0	23.1	23.4	23.7	24.7	24.8	24.9	25.1	26.7	26.9	27.0
		S/T	1.00	1.00	1.00	1.00	0.62	0.85	1.00	1.00	0.40	0.60	0.79	0.99	0.39	0.58	0.76
		kW	3.44	3.47	3.51	3.51	3.51	3.56	3.59	3.63	3.66	3.68	3.70	3.72	3.83	3.85	3.86
1200	50	TC	19.8	20.0	20.5	20.7	20.5	20.7	20.9	21.1	21.9	22.0	22.2	22.4	26.4	26.6	26.8
		S/T	0.99	1.00	1.00	1.00	0.61	0.83	1.00	1.00	0.39	0.57	0.73	0.90	0.39	0.53	0.67
		kW	1.03	1.04	1.05	1.05	1.05	1.06	1.07	1.08	1.08	1.09	1.11	1.12	1.33	1.35	1.36
	65	TC	33.0	33.3	34.1	34.4	34.1	34.4	34.9	35.2	36.5	36.7	37.0	37.4	44.0	44.3	44.7
		S/T	0.99	1.00	1.00	1.00	0.63	0.86	1.00	1.00	0.39	0.58	0.76	0.94	0.39	0.54	0.69
		kW	2.14	2.16	2.18	2.18	2.18	2.21	2.23	2.26	2.24	2.28	2.30	2.33	2.78	2.81	2.84
	75	TC	33.0	33.4	34.1	34.4	34.1	34.4	34.9	35.3	36.5	36.8	37.0	37.4	43.7	44.0	44.3
		S/T	1.00	1.00	1.00	1.00	0.62	0.85	1.00	1.00	0.39	0.58	0.76	0.94	0.39	0.54	0.69
		kW	2.34	2.36	2.39	2.39	2.39	2.41	2.43	2.46	2.46	2.48	2.52	2.54	2.92	2.96	2.98
	85	TC	32.5	32.8	33.5	33.9	33.5	33.9	34.2	34.6	35.9	36.2	36.4	36.7	42.6	42.9	43.2
		S/T	1.00	1.00	1.00	1.00	0.63	0.86	1.00	1.00	0.39	0.58	0.76	0.95	0.39	0.54	0.70
		kW	2.58	2.60	2.64	2.64	2.64	2.66	2.68	2.72	2.72	2.74	2.77	2.80	3.37	3.39	3.43
	95	TC	32.0	32.5	33.2	33.5	33.2	33.5	33.8	34.2	35.2	35.7	36.0	36.2	41.5	41.7	41.9
		S/T	1.00	1.00	0.99	1.00	0.63	0.87	1.00	1.00	0.39	0.58	0.76	1.00	0.39	0.55	0.71
		kW	3.06	3.10	3.13	3.13	3.13	3.16	3.19	3.23	3.24	3.26	3.30	3.32	3.96	4.00	4.02
	105	TC	31.2	31.6	32.3	32.7	32.3	32.7	33.0	33.4	34.4	34.9	35.1	35.4	38.5	38.5	38.7
		S/T	0.99	1.00	0.99	1.00	0.63	0.87	1.00	1.00	0.39	0.59	0.78	1.00	0.39	0.57	0.74
		kW	3.62	3.66	3.69	3.69	3.69	3.74	3.77	3.81	3.82	3.86	3.89	3.92	4.29	4.26	4.29
	115	TC	25.9	26.2	26.7	27.0	26.7	27.0	27.3	27.7	29.4	29.5	29.1	29.2	30.4	30.5	30.6
		S/T	1.00	1.00	1.00	1.00	0.64	0.88	1.00	1.00	0.40	0.62	0.86	1.00	0.40	0.62	0.84
		kW	3.39	3.43	3.47	3.47	3.47	3.50	3.54	3.57	3.63	3.66	3.64	3.67	3.70	3.72	3.73
	125	TC	22.0	22.3	22.7	23.0	22.7	23.0	23.2	23.5	25.0	25.1	24.7	24.8	25.8	25.9	26.0
		S/T	1.00	1.00	1.00	1.00	0.62	0.85	1.00	1.00	0.40	0.60	0.79	0.99	0.39	0.58	0.76
		kW	3.50	3.53	3.57	3.57	3.57	3.61	3.64	3.68	3.74	3.77	3.75	3.78	3.81	3.83	3.84
1400	50	TC	21.0	21.3	21.7	22.0	21.7	22.0	22.2	22.5	23.3	23.5	23.6	23.8	27.9	28.0	28.5
		S/T	0.99	1.00	1.00	1.00	0.61	0.83	1.00	1.00	0.39	0.57	0.73	0.90	0.39	0.53	0.67
		kW	1.20	1.21	1.23	1.23	1.23	1.24	1.25	1.26	1.26	1.28	1.29	1.30	1.53	1.54	1.46
	65	TC	35.1	35.5	36.2	36.6	36.2	36.6	37.0	37.5	38.8	39.1	39.3	39.7	46.4	46.7	47.5
		S/T	0.99	1.00	1.00	1.00	0.64	0.88	1.00	1.00	0.39	0.59	0.78	0.99	0.38	0.55	0.71
		kW	2.50	2.53	2.55	2.55	2.55	2.59	2.61	2.64	2.64	2.66	2.69	2.72	3.18	3.21	3.04
	75	TC	35.2	35.6	36.4	36.7	36.4	36.7	37.1	37.6	39.0	39.2	39.5	39.9	47.6	47.8	47.9
		S/T	0.99	1.00	1.00	1.00	0.63	0.88	1.00	1.00	0.39	0.59	0.78	1.00	0.38	0.55	0.71
		kW	2.58	2.60	2.64	2.64	2.64	2.66	2.68	2.72	2.72	2.74	2.77	2.80	3.50	3.51	3.51
	85	TC	34.4	34.9	35.6	36.0	35.6	36.0	36.3	36.7	38.2	38.4	38.7	38.9	44.9	45.1	45.4
		S/T	0.99	1.00	1.00	1.00	0.64	0.89	1.00	1.00	0.39	0.59	0.79	1.00	0.39	0.56	0.73
		kW	2.91	2.93	2.97	2.97	2.97	3.00	3.03	3.06	3.07	3.10	3.12	3.15	3.74	3.77	3.80
	95	TC	33.6	33.9	34.6	35.1	34.6	35.1	35.5	35.8	37.3	37.5	37.7	38.0	42.7	42.9	42.9
		S/T	1.00	1.00	1.00	1.00	0.64	0.90	1.00	1.00	0.39	0.60	0.80	1.00	0.39	0.57	0.75
		kW	3.42	3.45	3.49	3.49	3.49	3.53	3.56	3.60	3.62	3.64	3.67	3.69	4.23	4.24	4.24
	105	TC	32.7	33.0	33.7	34.1	33.7	34.1	34.4	34.9	36.2	36.4	36.6	36.9	39.0	39.2	39.0
		S/T	1.00	1.00	1.00	1.00	0.65	0.90	1.00	1.00	0.39	0.60	0.81	1.00	0.39	0.59	0.79
		kW	3.99	4.02	4.07	4.07	4.07	4.12	4.15	4.20	4.23	4.26	4.29	4.32	4.44	4.46	4.39
	115	TC	26.1	26.3	26.9	27.2	26.9	27.2	27.5	27.8	29.0	29.1	29.2	29.4	31.1	31.2	31.3
		S/T	1.00	1.00	1.00	1.00	0.66	1.00	1.00	1.00	0.40	0.66	0.93	1.00	0.40	0.65	0.90
		kW	3.53	3.56	3.61	3.61	3.61	3.64	3.68	3.72	3.76	3.77	3.80	3.81	3.93	3.94	3.95
	125	TC	22.2	22.4	22.9	23.1	22.9	23.1	23.4	23.6	24.7	24.7	24.8	25.0	26.4	26.5	26.6
		S/T	1.00	1.00	1.00	1.00	0.62	0.85	1.00	1.00	0.40	0.60	0.79	0.99	0.39	0.58	0.76
		kW	3.63	3.67	3.72	3.72	3.72	3.75	3.79	3.83	3.88	3.89	3.91	3.92	4.05	4.06	4.07

SUBMITTAL DATA SHEET

innovair

Series Name: Corvus Inverter Package Units
Model Number: PXV60H2A

Package Unit Heat Pump	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:

OUTDOOR SPECIFICATION		
Compressor Type		TWIN ROTARY
Compressor Model		KTQ420D1UMU
Refrigerant		R32
Refrigerant Oil Charge(mL)		1400
Refrigerant Oil		VG74
Outdoor Air Flow (Max) (CFM)		4700
Outdoor Noise Level (dBA)		84
Dimension (W×D×H)	inch	57 1/8 x 43 3/8 x 47 1/4
	mm	1450 x 1100 x 1200
Package (W×D×H)	inch	57 5/16 x 43 1/2 x 51 3/16
	mm	1455 x 1105 x 1300
Net/Gross Weight	lbs	697/705
	kg	316/320

EFFICIENCY			
Cooling		Heating	
SEER2	17	HSPF2-4	7.7
EER2	10.6	COP 5°F	1.8

ELECTRICAL	
Power Supply	208~230 / 1 / 60
Indoor MCA	-
Indoor MOP	-
External Static Pressure In.W.C. (Pa)	0-0.8 (0-200)
Outdoor MCA	39
Outdoor MOP	55
Communication Wiring	-
Compressor Current (A)	6.9
Outdoor Fan Motor RLA	
Outdoor Fan Motor W	750
Indoor Fan Motor RLA	3
Indoor Fan Motor W	450
System Power Input @ Cooling (W)	5380
System Power Input @ Heating (W)	5040
MCA: Min. circuit amps (A)	**MOCP: Max. over current protection (A)**
RLA: Rated load amps (A)	**W: Fan motor rated output (W)**

PERFORMANCE of Cooling	
Cooling (Btu/hr)	
Rated Capacity	57000
Min/Max Capacity	18300~60000
Moisture Removal(L/h)	6.77
Standard Operating Range(°F/°C)	50~125 (10~52)
Rated Cooling Conditions:	Indoor: 80°F DB/67°F WB
	Outdoor: 95°F DB/75°F WB

PIPING	
Throttle type(Indoor)	EXV
Throttle type(Outdoor)	EXV
Liquid Size	-
Gas Size	-
Max. Piping Length(ft/m)	-
Max. Height Difference(ft/m)	-
Max. Pre-charged Length(ft/m)	-
Refrigerant Pre-charged Amount(oz/kg)	187(5.3)
Additional Charge of Refrigerant((oz/ft)/(g/m))	
Connection Method	

PERFORMANCE of Heating	
Heating (Btu/hr)	
1. @ 47°F Rated	57000
2. @ 47°F Min/Max Capacity	17600~57900
3. @ 17°F Rated	35000
4. @ 5°F Rated: Capacity	41000
5. @ 5°F Max: Capacity	41000
Standard Operating Range(°F/°C)	-4~75 (-20~24)
1. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB
	Outdoor: 47°F DB/43°F WB
2. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB
	Outdoor: 17°F DB/15°F WB
3. Heating Conditions, Compressor	Indoor: 70°F DB/60°F WB
Operating at Max. Frequency	Outdoor: 5°F DB/5°F WB

Unit Dimension

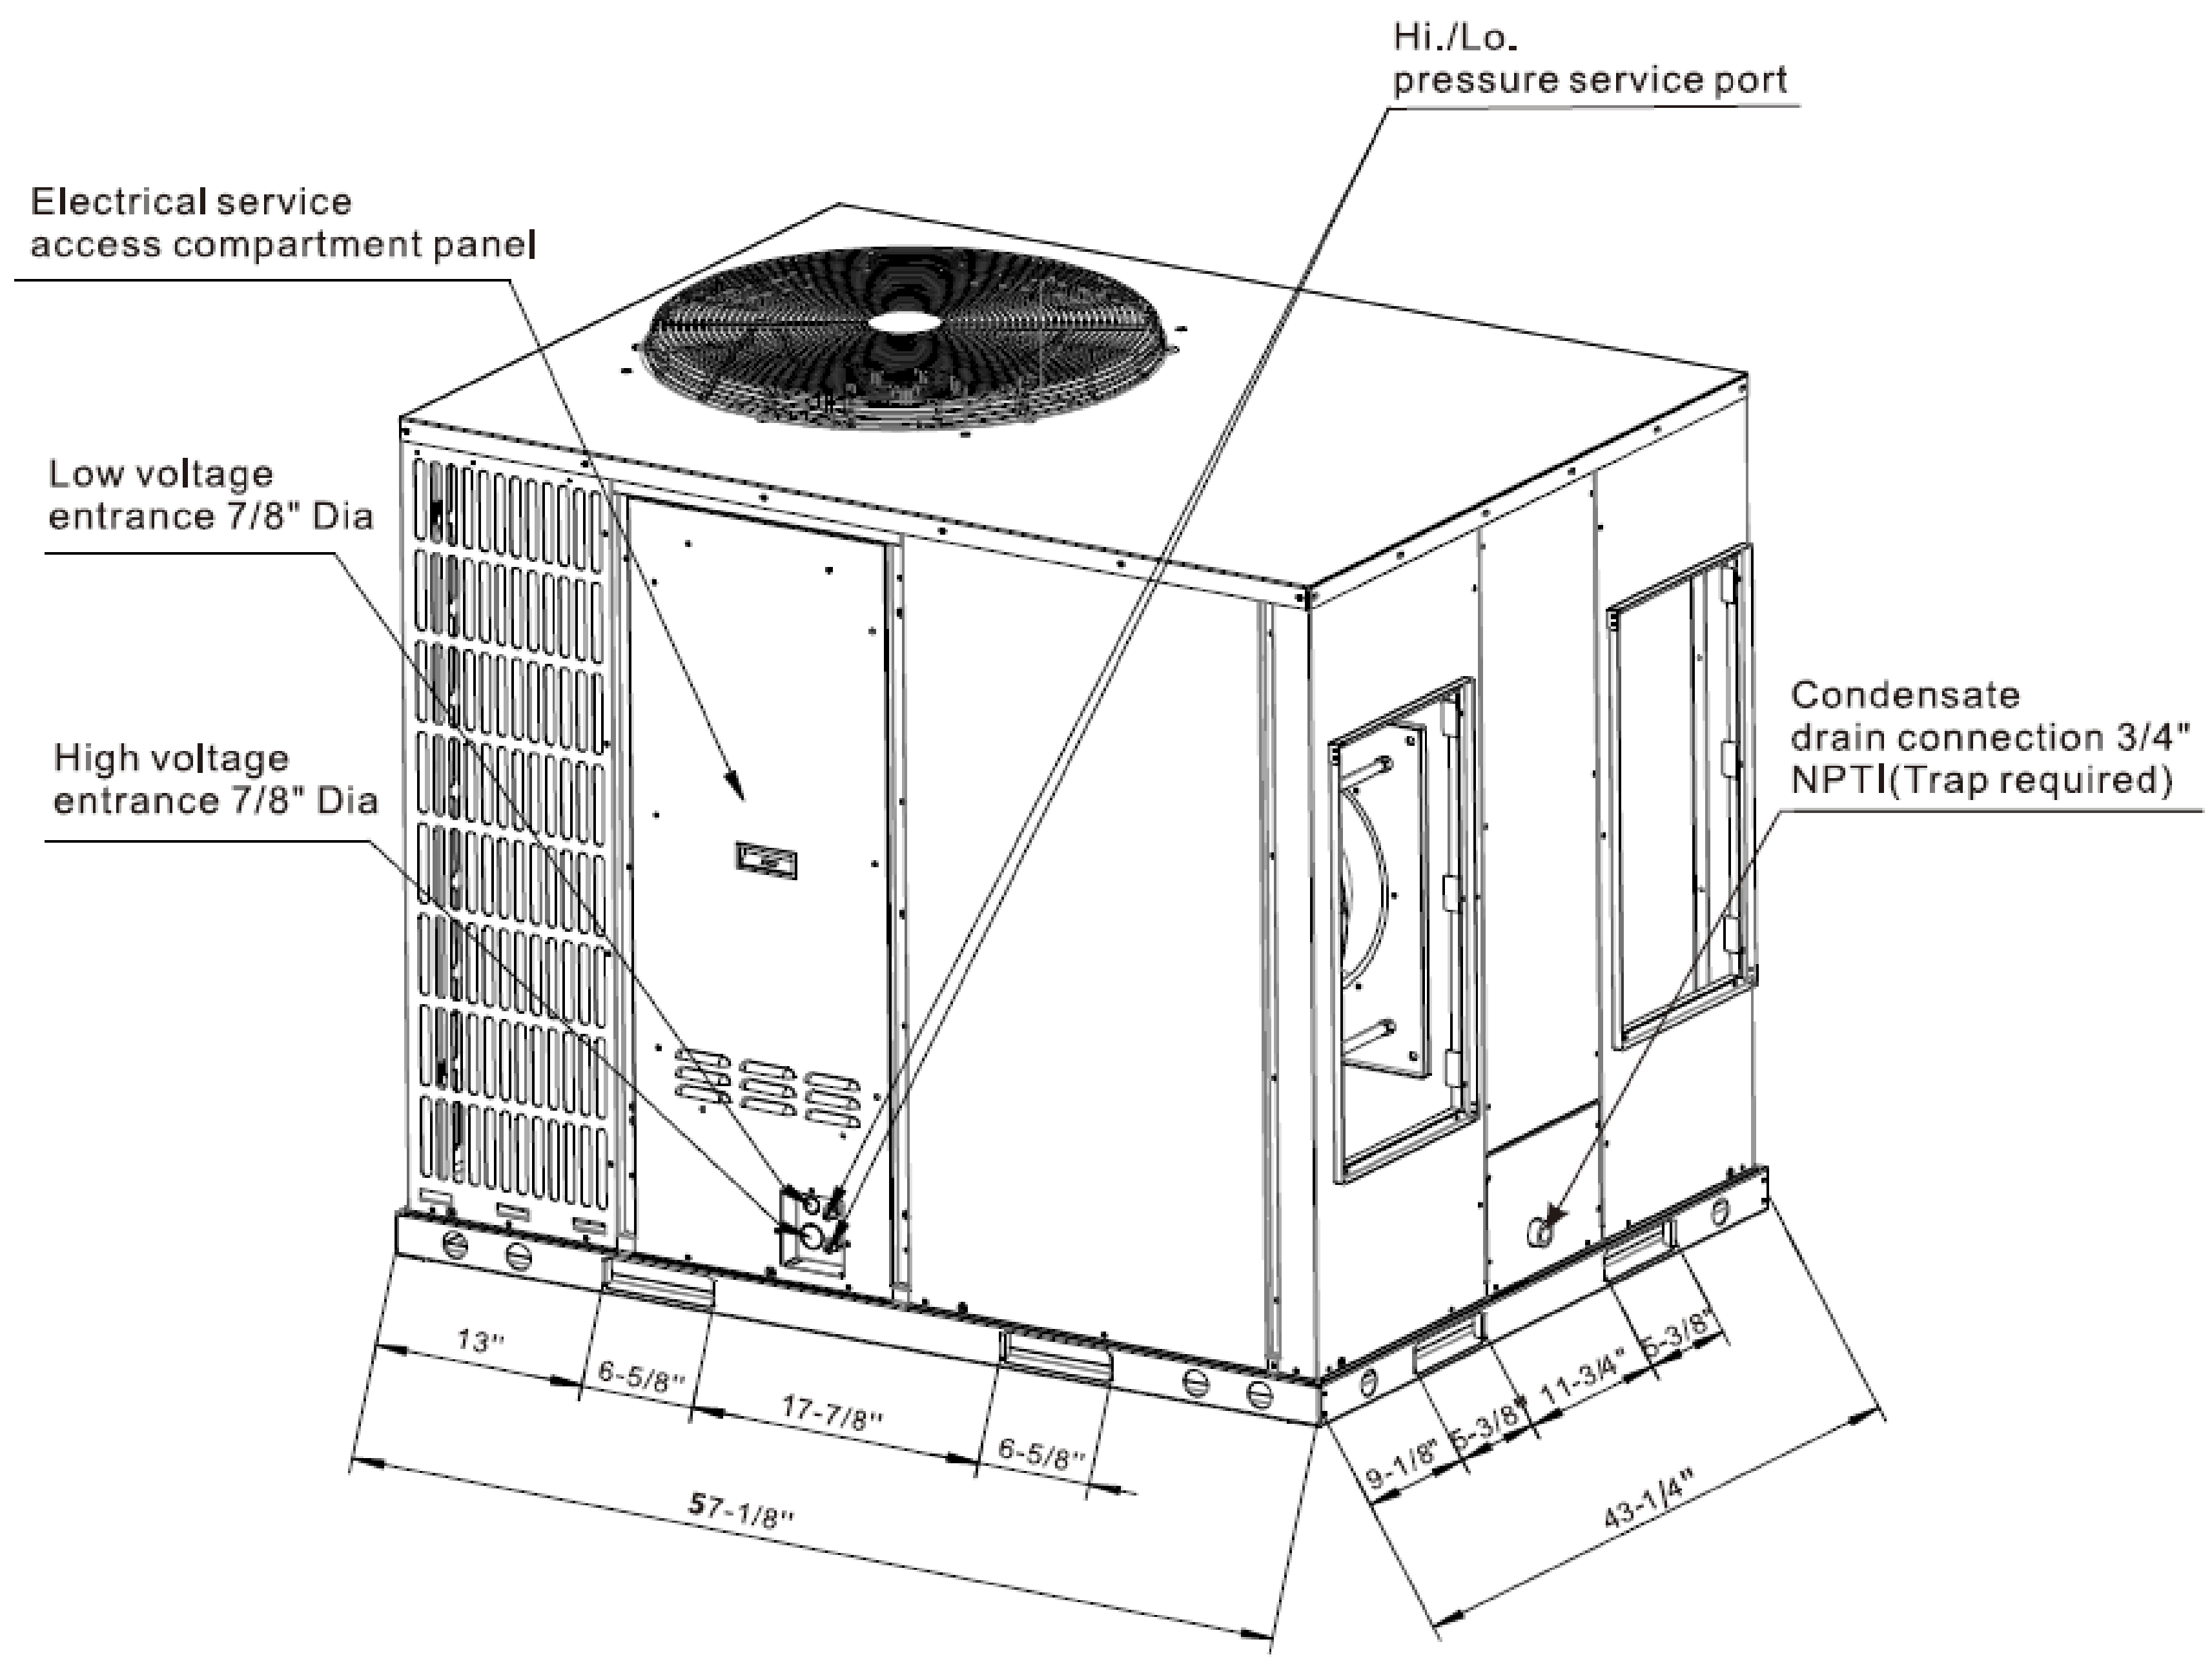

Dimensions - Back and Bottom

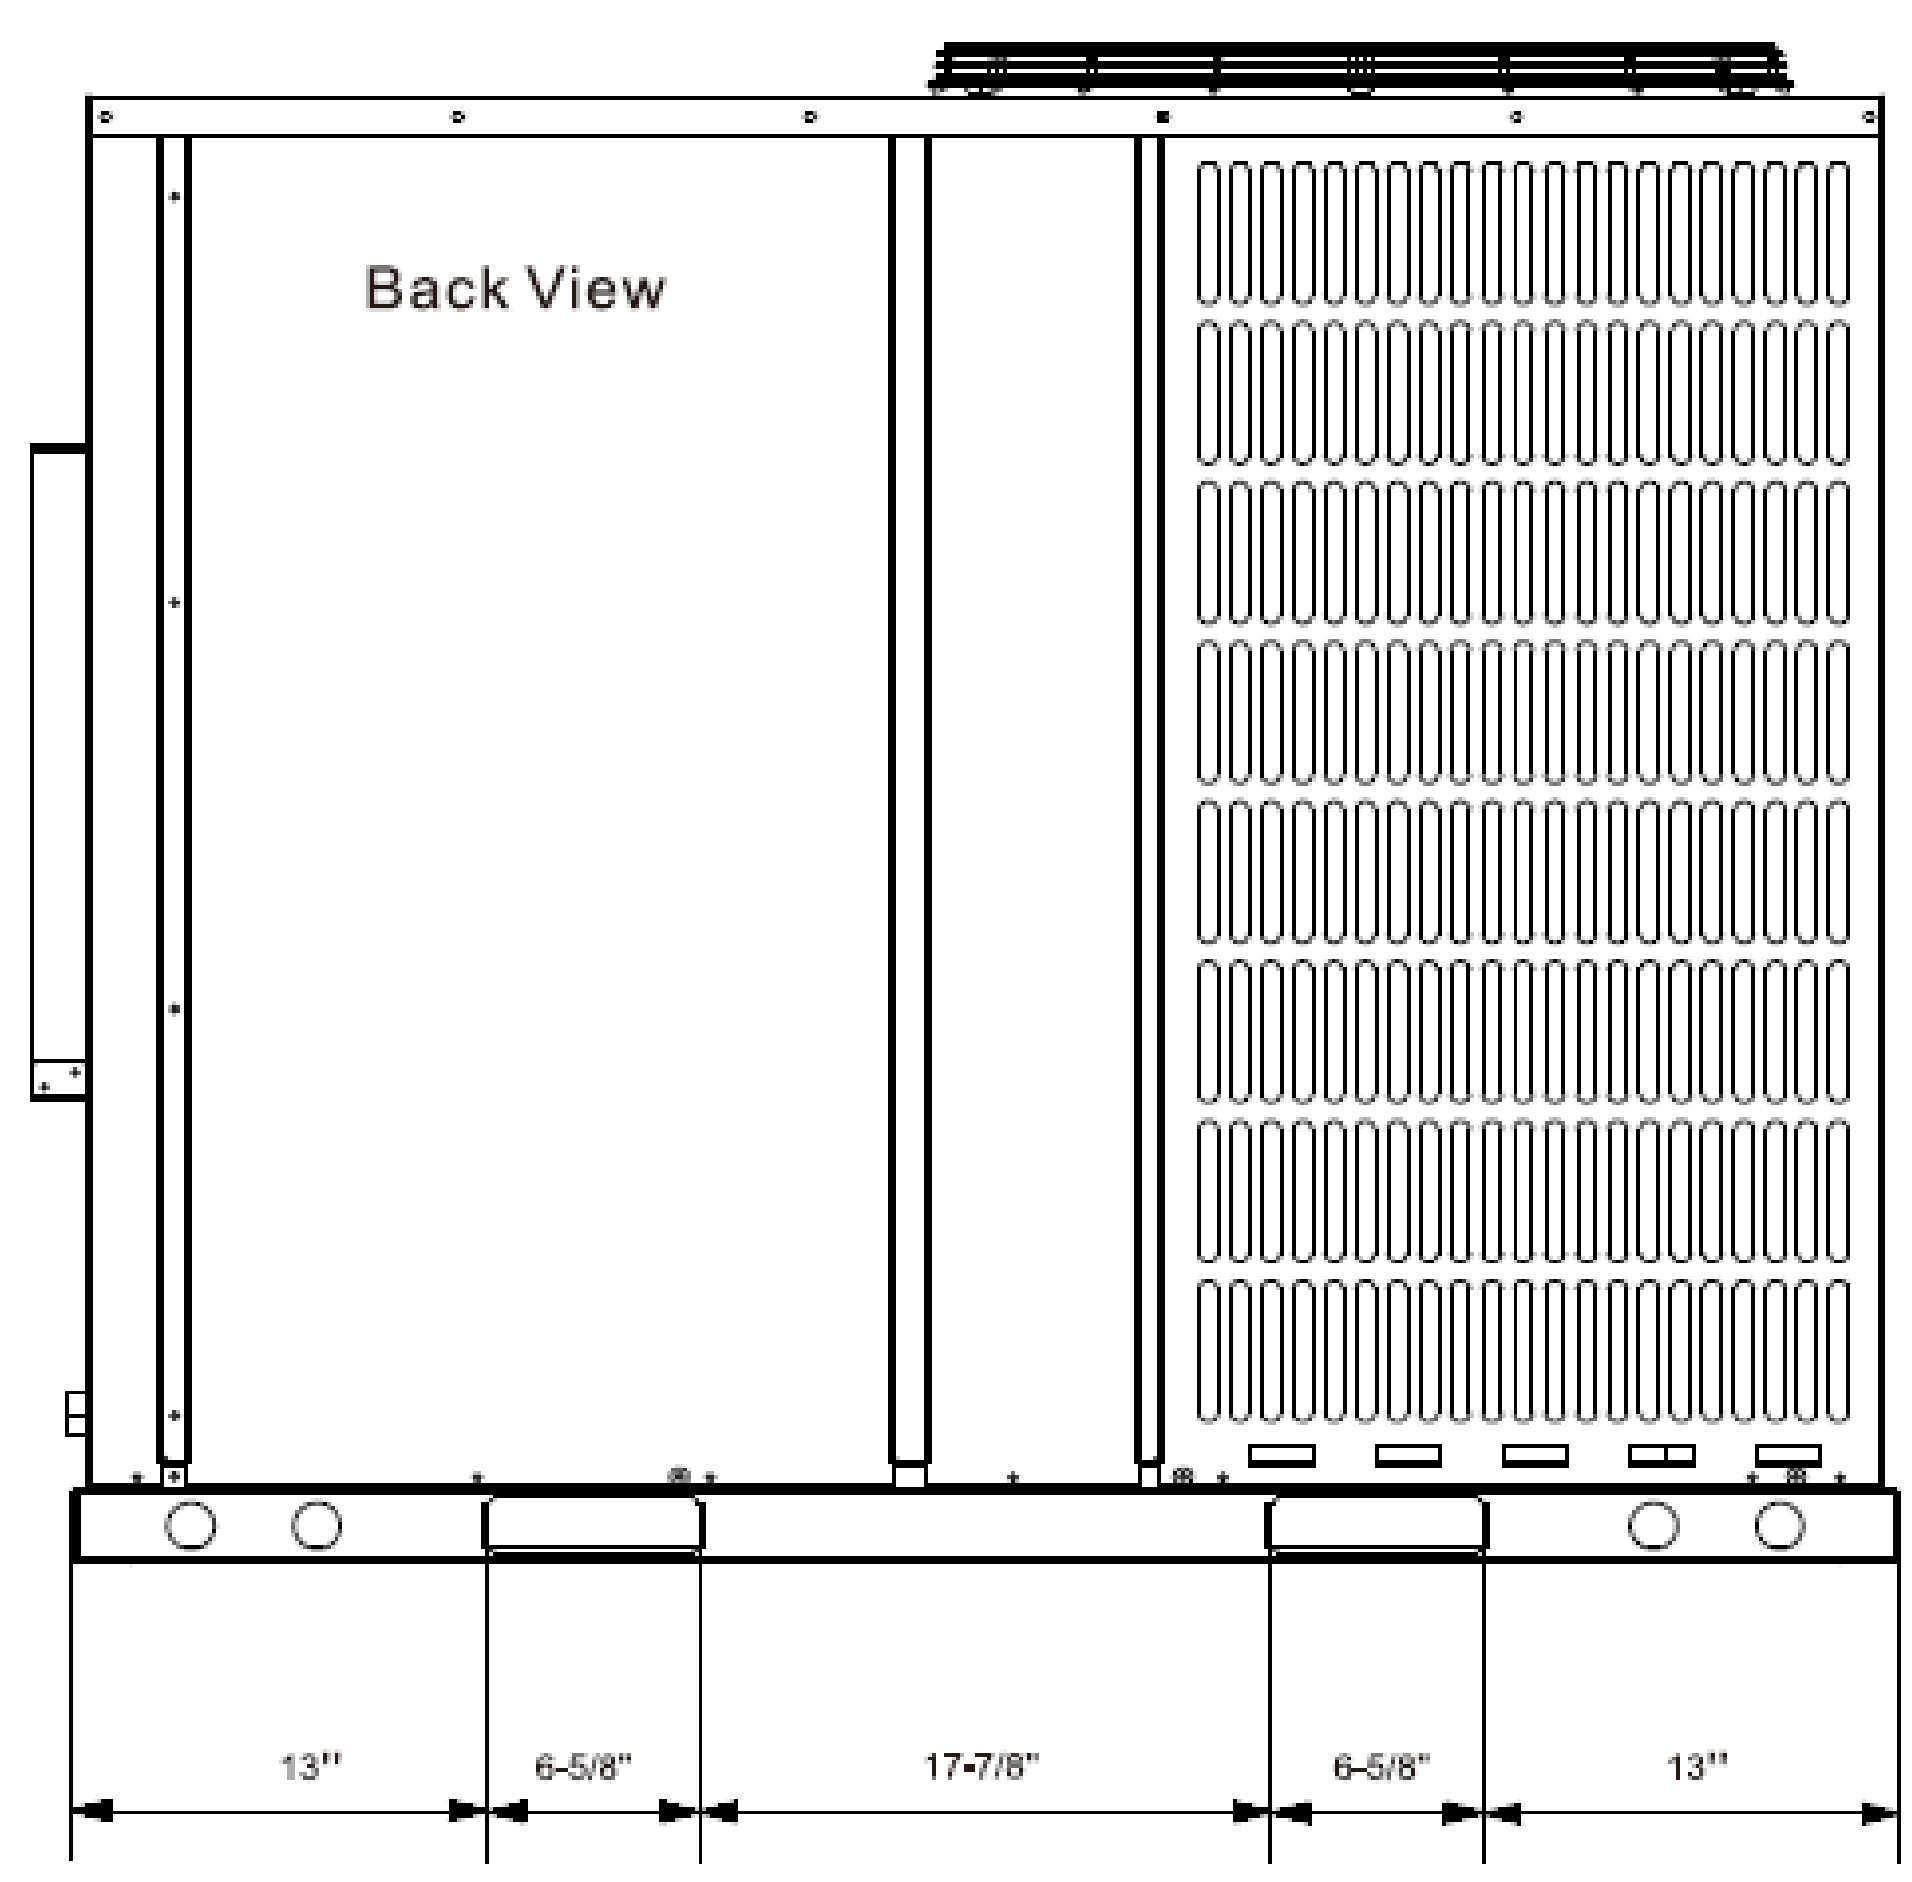

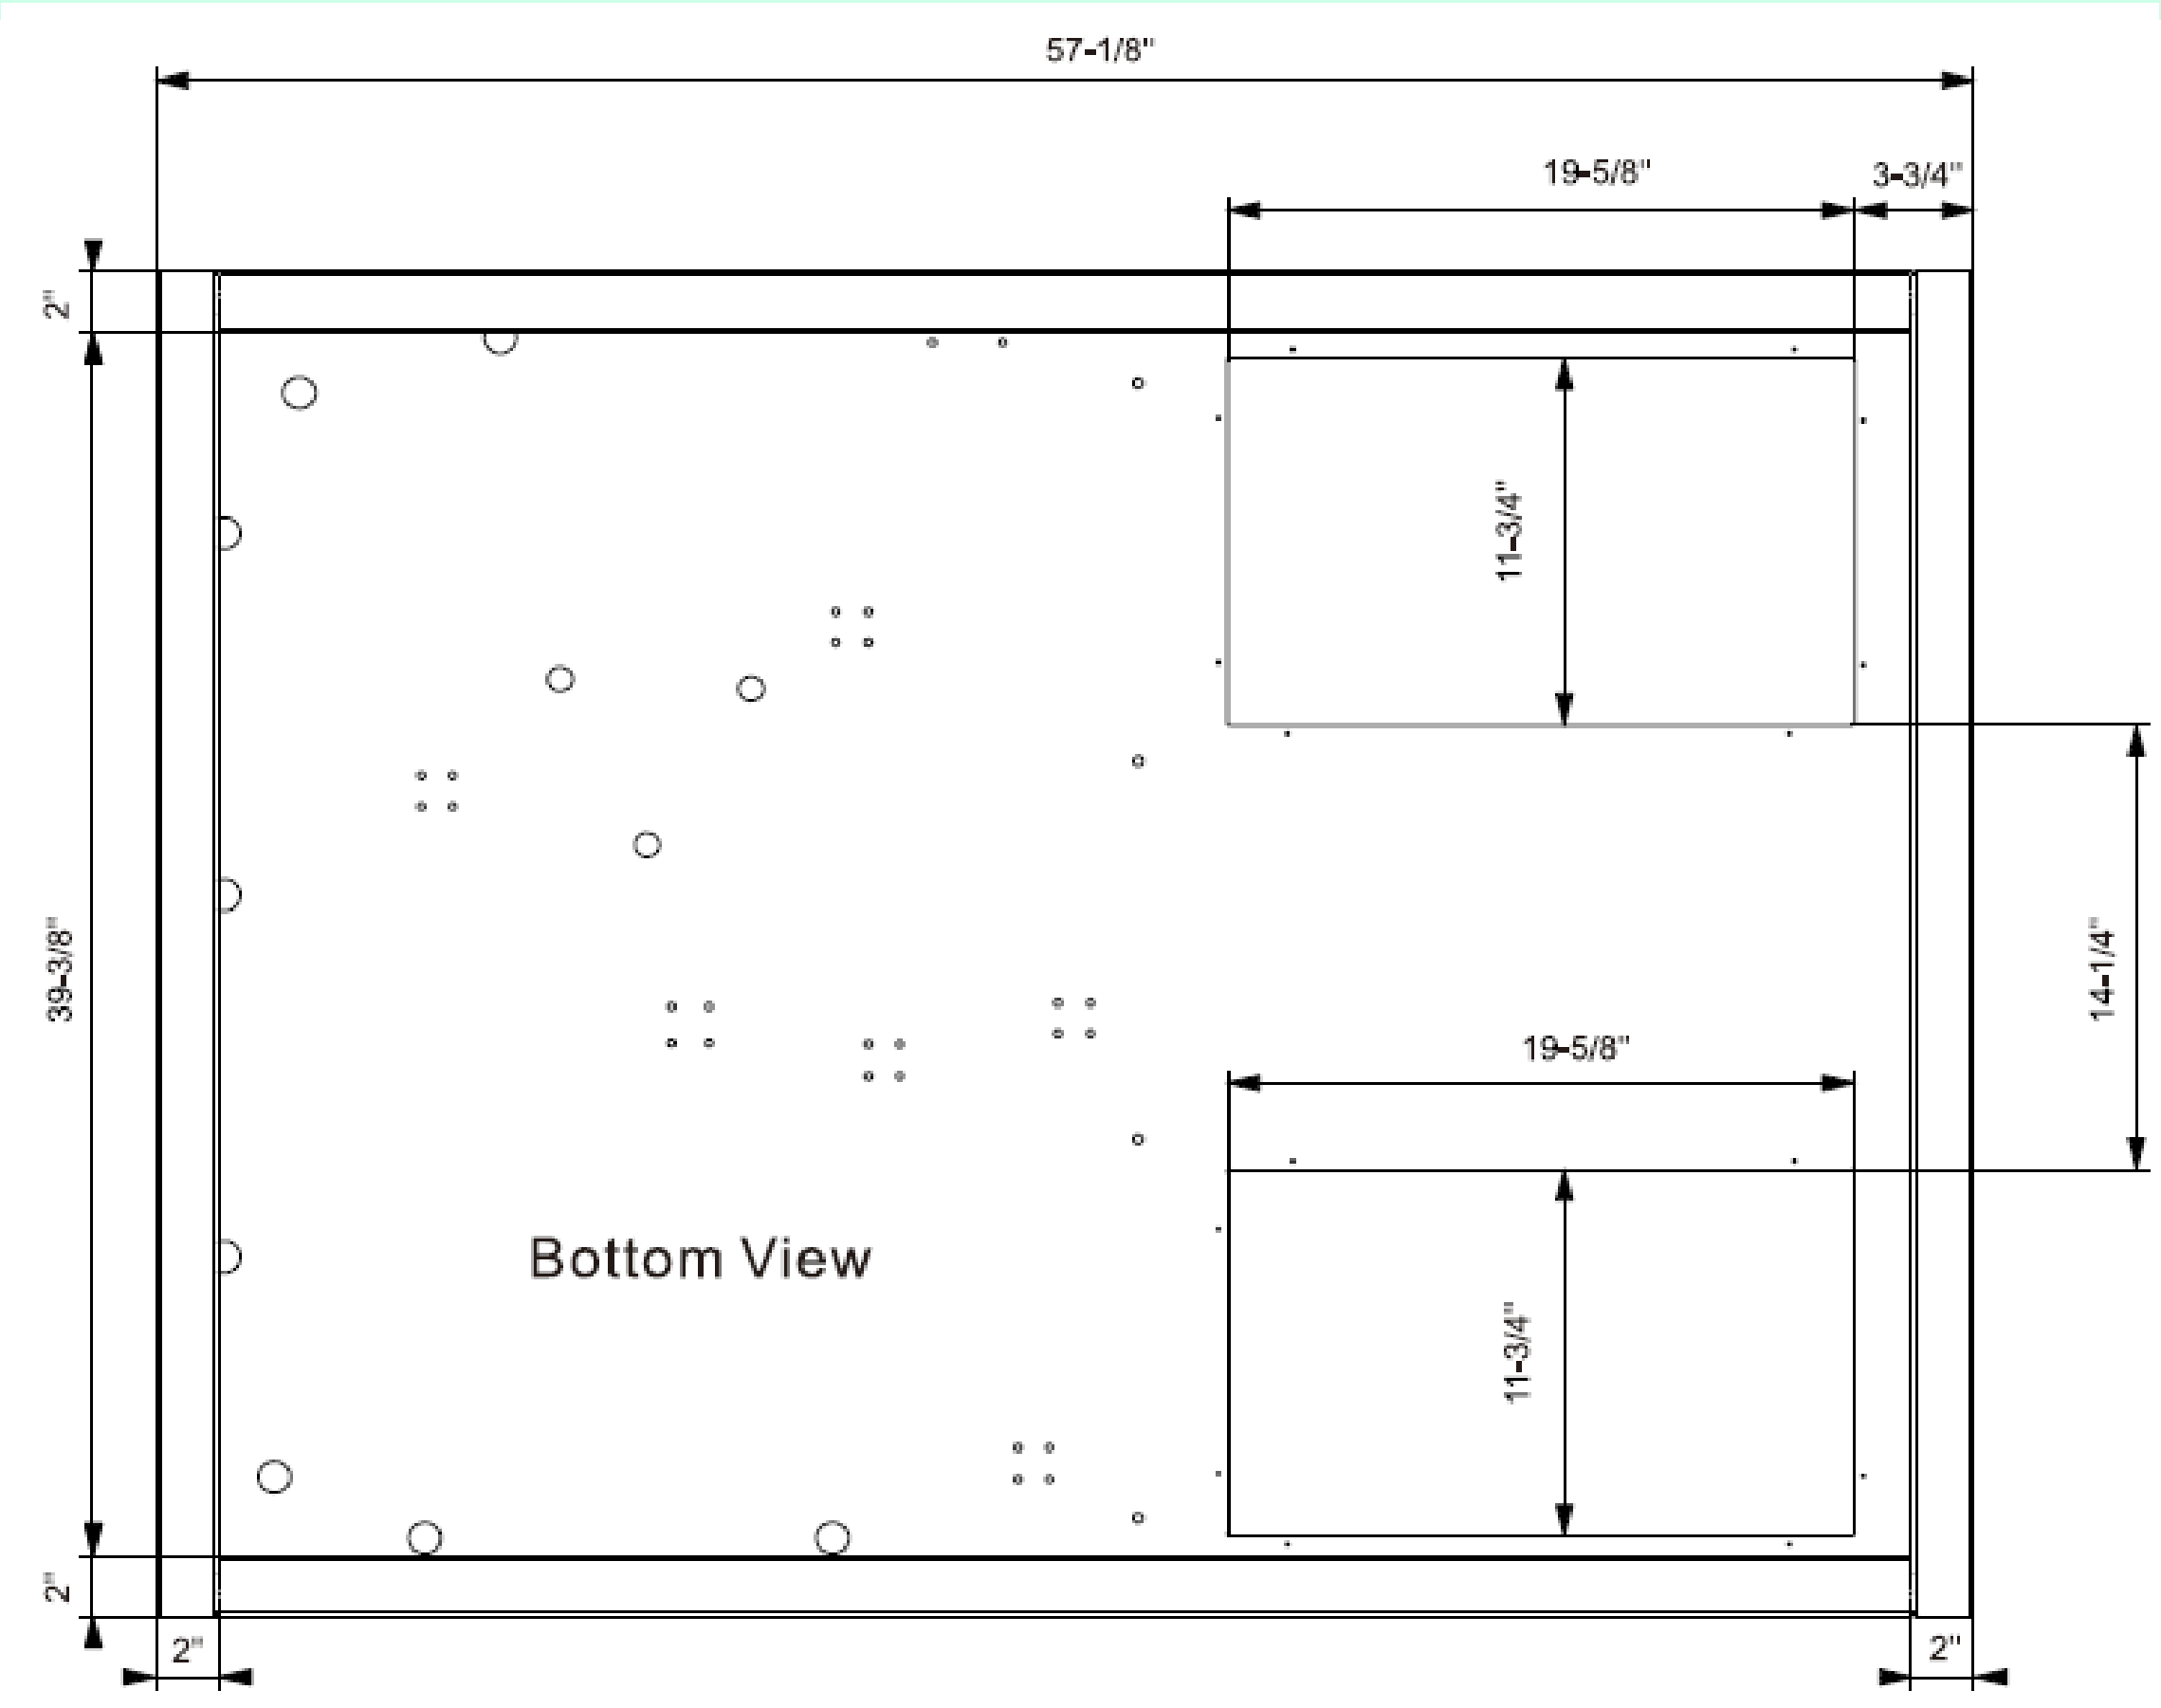

Dimensions - Left and Top

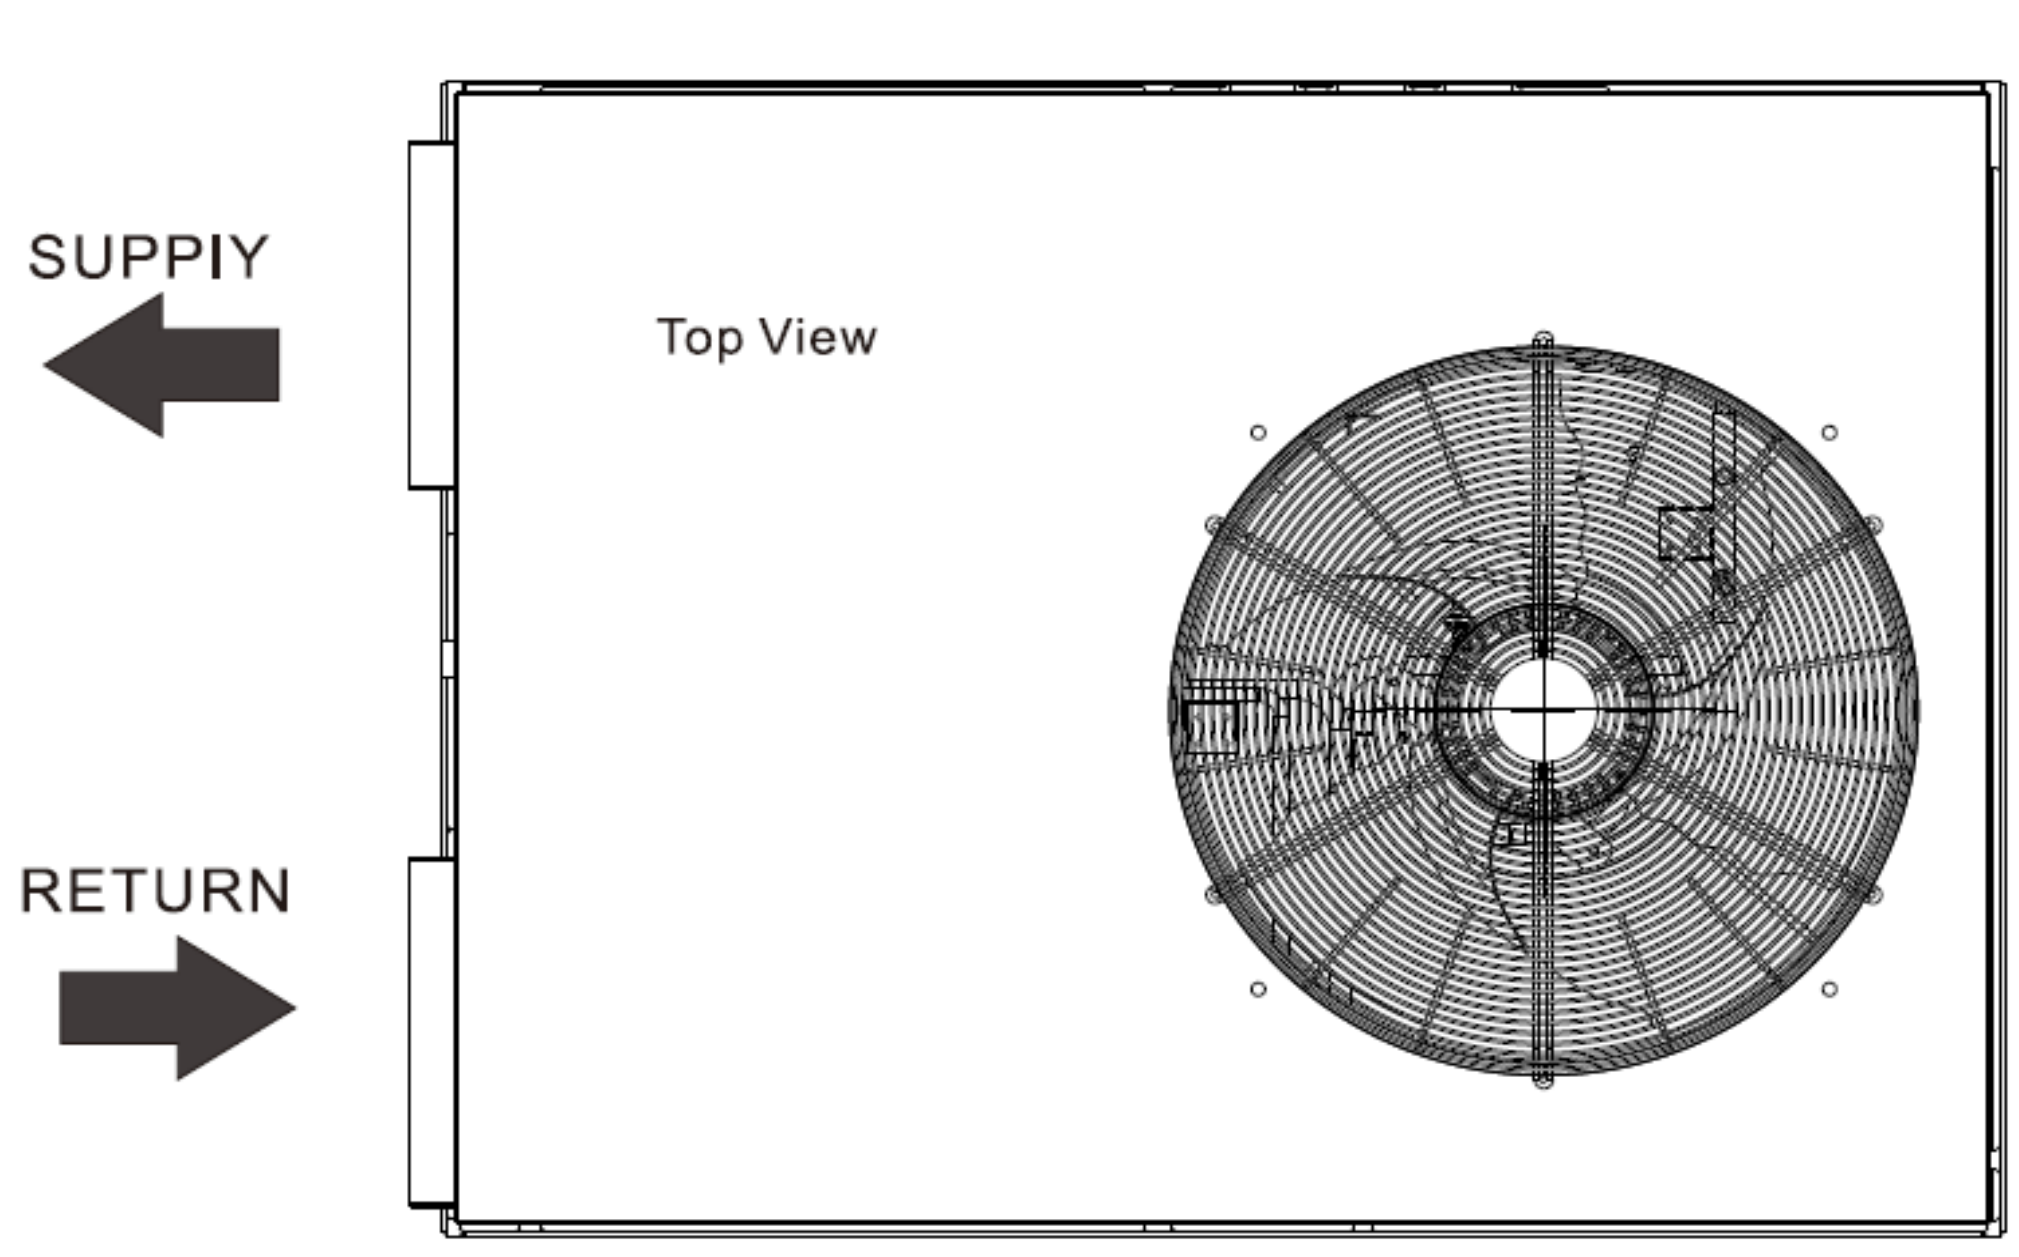

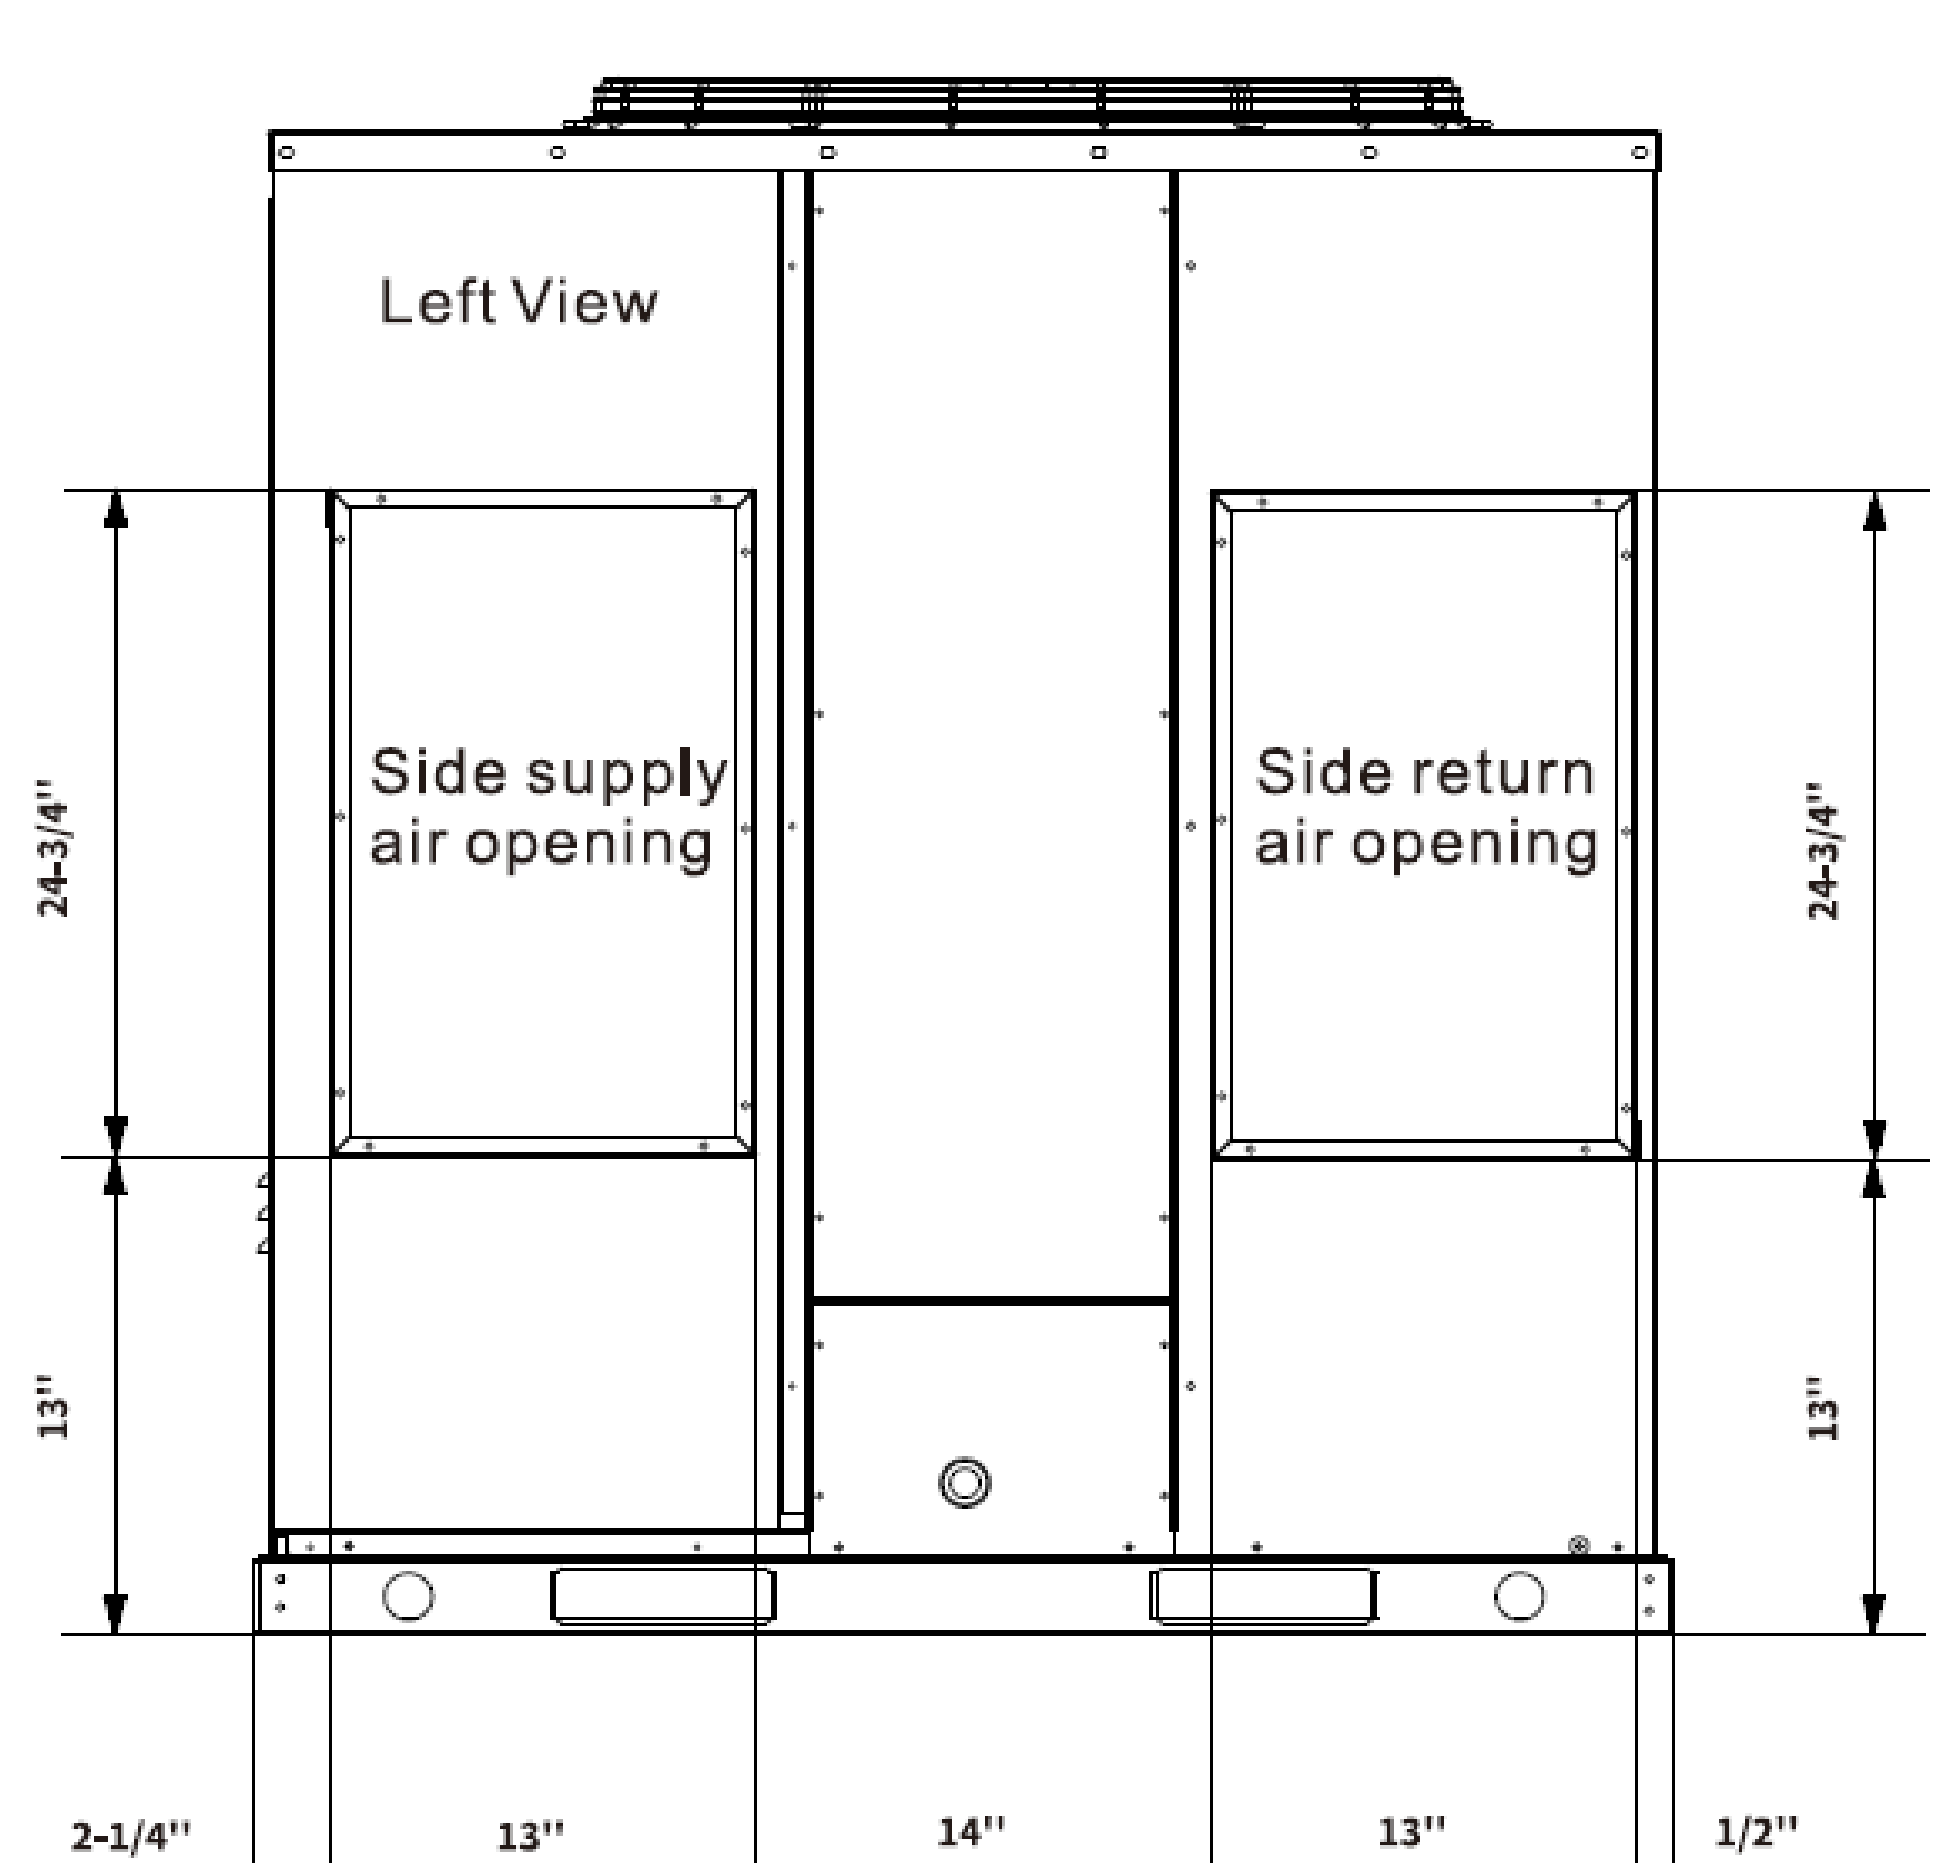

Performance Chart

Heating

Airflow (CFM)	ID ℉	ODB (°F)	75	65	55	47	35	25	15	5	-4	-13
		OWB (°F)	64	55	48	43	32	23	13	3	-6	-15
1500	60	TC	66.0	66.0	65.8	63.2	53.7	50.0	42.0	38.9	34.0	25.5
		kW	4.10	4.38	5.15	5.60	5.21	5.56	5.10	4.98	4.74	3.79
	70	TC	51.0	50.7	50.9	50.2	50.2	49.1	41.2	38.3	33.3	25.0
		kW	3.06	3.23	3.80	4.44	5.32	6.05	5.51	5.36	5.06	4.05
	75	TC	43.0	42.8	42.8	42.8	42.2	42.2	38.9	35.9	30.4	22.8
		kW	2.56	2.74	3.20	3.78	4.40	5.15	5.75	5.58	5.26	4.21
	80	TC	35.2	35.2	35.2	35.1	34.9	34.6	34.6	34.6	29.9	22.4
		kW	2.12	2.26	2.65	3.08	3.67	4.14	5.19	5.66	5.49	4.39
1700	60	TC	73.7	73.7	71.6	64.0	54.6	50.9	42.8	39.7	34.6	26.0
		kW	4.85	5.13	5.70	5.49	5.15	5.53	5.11	4.98	4.76	3.81
	70	TC	57.1	56.8	56.3	56.0	53.3	49.7	41.8	38.8	33.8	25.4
		kW	3.53	3.78	4.34	5.00	5.62	5.98	5.51	5.36	5.09	4.07
	75	TC	48.1	48.0	48.0	47.1	47.3	47.3	39.6	36.4	30.9	23.2
		kW	2.97	3.16	3.70	4.21	5.04	5.92	5.73	5.56	5.28	4.22
	80	TC	39.4	39.4	39.4	39.3	38.8	38.6	38.8	35.9	30.4	22.8
		kW	2.44	2.59	3.03	3.50	4.08	4.74	5.94	5.81	5.49	4.39
1900	60	TC	82.1	80.8	72.9	65.2	55.4	51.7	43.4	40.4	35.2	26.4
		kW	5.70	5.83	5.66	5.49	5.19	5.56	5.21	5.08	4.87	3.90
	70	TC	63.1	62.9	62.9	62.8	54.1	50.5	42.6	39.6	34.4	25.8
		kW	4.06	4.32	5.08	5.90	5.64	6.02	5.58	5.45	5.21	4.17
	75	TC	53.7	53.6	52.9	52.8	52.8	49.9	40.2	37.0	31.7	23.8
		kW	3.46	3.67	4.17	4.89	5.81	6.28	5.81	5.66	5.39	4.31
	80	TC	44.3	44.1	44.1	43.9	43.3	43.3	39.7	36.5	31.1	23.3
		kW	2.88	3.05	3.50	4.08	4.72	5.47	6.03	5.88	5.58	4.46

Cooling

Airflow (CMF)	Outdoor DB	IWB (℉)	59				63				67				71			
		IDB (℉)	70	75	80	85	70	75	80	85	70	75	80	85	70	75	80	85
1500	5	TC	44.2	44.7	45.6	46.2	45.6	46.2	46.6	47.1	48.7	49.2	49.6	49.9	\	59.4	59.8	60.3
		S/T	0.99	1.00	1.00	1.00	0.61	0.83	1.00	1.00	0.39	0.57	0.73	0.90	\	0.39	0.53	0.67
		kW	0.90	0.91	0.91	0.91	0.91	0.93	0.93	0.94	0.94	0.95	0.96	0.97	\	1.19	1.20	1.22
	25	TC	46.1	46.6	47.6	48.2	47.6	48.2	48.7	49.1	50.9	51.3	51.8	52.1	\	62.0	62.5	62.9
		S/T	0.99	1.00	1.00	1.00	0.61	0.83	1.00	1.00	0.39	0.57	0.73	0.90	\	0.39	0.53	0.67
		kW	1.00	1.01	1.02	1.02	1.02	1.03	1.04	1.05	1.05	1.06	1.07	1.08	\	1.32	1.33	1.35
	50	TC	48.6	49.1	50.1	50.7	50.1	50.7	51.2	51.7	53.5	54.0	54.5	54.9	\	65.3	65.8	66.3
		S/T	0.99	1.00	1.00	1.00	0.61	0.83	1.00	1.00	0.39	0.57	0.73	0.90	\	0.39	0.53	0.67
		kW	1.11	1.12	1.13	1.13	1.13	1.14	1.15	1.17	1.17	1.17	1.19	1.20	\	1.47	1.48	1.50
	75	TC	48.6	49.2	50.2	50.7	50.2	50.7	51.4	51.9	53.7	54.2	54.7	55.0	\	64.6	65.1	65.6
		S/T	1.00	1.00	0.99	1.00	0.62	0.83	1.00	1.00	0.39	0.56	0.73	0.90	\	0.39	0.53	0.67
		kW	1.23	1.24	1.26	1.26	1.26	1.27	1.29	1.29	1.29	1.31	1.32	1.34	\	1.62	1.63	1.65
	85	TC	47.9	48.4	49.4	50.1	49.4	50.1	50.6	51.1	52.9	53.4	53.9	54.2	\	63.4	63.9	64.3
		S/T	1.00	1.00	1.00	1.00	0.62	0.84	1.00	1.00	0.39	0.57	0.74	0.91	\	0.39	0.53	0.67
		kW	1.39	1.40	1.42	1.42	1.42	1.43	1.45	1.46	1.46	1.47	1.49	1.50	\	1.83	1.86	1.87
	95	TC	47.1	47.6	48.6	49.2	48.6	49.2	49.7	50.2	52.0	52.5	52.9	53.4	\	62.0	62.5	62.8
		S/T	1.00	1.00	1.00	1.00	0.62	0.84	1.00	1.00	0.39	0.57	0.74	0.92	\	0.39	0.53	0.68
		kW	1.67	1.68	1.71	1.71	1.71	1.72	1.74	1.76	1.76	1.78	1.79	1.81	\	2.19	2.20	2.22
	105	TC	46.1	46.8	47.7	48.2	47.7	48.2	48.7	49.2	51.1	51.5	51.9	52.2	\	59.8	60.0	60.3
		S/T	0.99	1.00	1.00	1.00	0.62	0.84	1.00	1.00	0.39	0.57	0.75	0.93	\	0.39	0.54	0.69
		kW	1.99	2.01	2.03	2.03	2.03	2.05	2.07	2.09	2.09	2.12	2.13	2.15	\	2.53	2.54	2.55
	115	TC	41.3	41.8	42.8	43.1	42.8	43.1	43.6	44.1	45.9	46.3	46.4	46.8	\	49.7	50.1	50.2
		S/T	1.00	1.00	1.00	1.00	0.62	0.85	1.00	1.00	0.40	0.60	0.79	0.99	\	0.39	0.58	0.76
		kW	2.02	2.04	2.06	2.06	2.06	2.09	2.12	2.14	2.15	2.17	2.18	2.19	\	2.25	2.27	2.27
	125	TC	35.1	35.5	36.4	36.7	36.4	36.7	37.1	37.5	39.0	39.3	39.5	39.7	\	42.3	42.6	42.7
		S/T	1.00	1.00	1.00	1.00	0.62	0.85	1.00	1.00	0.40	0.60	0.79	0.99	\	0.39	0.58	0.76
		kW	2.08	2.10	2.13	2.13	2.13	2.16	2.18	2.20	2.22	2.23	2.25	2.25	\	2.32	2.33	2.34
1700	5	TC	47.5	48.0	49.2	49.6	49.2	49.6	50.2	50.7	52.6	52.9	53.4	53.8	\	63.4	63.9	64.3
		S/T	0.99	1.00	1.00	1.00	0.61	0.83	1.00	1.00	0.39	0.57	0.73	0.90	\	0.39	0.53	0.67
		kW	1.05	1.06	1.07	1.07	1.07	1.08	1.10	1.11	1.10	1.12	1.13	1.14	\	1.36	1.38	1.39
	25	TC	49.6	50.1	51.3	51.8	51.3	51.8	52.4	52.9	54.9	55.2	55.7	56.2	\	66.2	66.7	67.2
		S/T	0.99	1.00	1.00	1.00	0.61	0.83	1.00	1.00	0.39	0.57	0.73	0.90	\	0.39	0.53	0.67
		kW	1.17	1.18	1.19	1.19	1.19	1.20	1.22	1.23	1.22	1.24	1.26	1.27	\	1.52	1.53	1.55
	50	TC	52.2	52.7	54.0	54.5	54.0	54.5	55.2	55.7	57.8	58.2	58.7	59.1	\	69.7	70.2	70.7
		S/T	0.99	1.00	1.00	1.00	0.63	0.86	1.00	1.00	0.39	0.58	0.76	0.94	\	0.39	0.54	0.69
		kW	1.29	1.31	1.32	1.32	1.32	1.34	1.35	1.37	1.36	1.38	1.40	1.41	\	1.68	1.71	1.72
	75	TC	52.2	52.9	54.0	54.5	54.0	54.5	55.2	55.8	57.8	58.3	58.7	59.1	\	69.2	69.7	70.2
		S/T	1.00	1.00	1.00	1.00	0.62	0.85	1.00	1.00	0.39	0.58	0.76	0.94	\	0.39	0.54	0.69
		kW	1.42	1.43	1.45	1.45	1.45	1.46	1.47	1.49	1.49	1.50	1.53	1.54	\	1.77	1.79	1.81
	85	TC	51.4	51.9	53.0	53.7	53.0	53.7	54.2	54.9	56.8	57.3	57.7	58.2	\	67.4	67.9	68.4
		S/T	1.00	1.00	1.00	1.00	0.63	0.86	1.00	1.00	0.39	0.58	0.76	0.95	\	0.39	0.54	0.70
		kW	1.56	1.58	1.60	1.60	1.60	1.61	1.63	1.65	1.65	1.66	1.68	1.70	\	2.04	2.06	2.08
	95	TC	50.7	51.4	52.5	53.0	52.5	53.0	53.5	54.2	55.7	56.5	57.0	57.3	\	65.8	66.1	66.4
		S/T	1.00	1.00	0.99	1.00	0.63	0.87	1.00	1.00	0.39	0.58	0.76	1.00	\	0.39	0.55	0.71
		kW	1.86	1.88	1.90	1.90	1.90	1.91	1.94	1.96	1.96	1.98	2.00	2.01	\	2.40	2.42	2.44
	105	TC	49.4	50.1	51.2	51.7	51.2	51.7	52.2	52.9	54.5	55.2	55.5	56.0	\	61.0	61.0	61.3
		S/T	0.99	1.00	0.99	1.00	0.63	0.87	1.00	1.00	0.39	0.59	0.78	1.00	\	0.39	0.57	0.74
		kW	2.19	2.22	2.24	2.24	2.24	2.27	2.29	2.31	2.32	2.34	2.36	2.37	\	2.60	2.58	2.60
	115	TC	41.0	41.5	42.3	42.8	42.3	42.8	43.3	43.8	46.6	46.8	46.1	46.3	\	48.1	48.2	48.4
		S/T	1.00	1.00	1.00	1.00	0.64	0.88	1.00	1.00	0.40	0.62	0.86	1.00	\	0.40	0.62	0.84
		kW	2.06	2.08	2.10	2.10	2.10	2.12	2.14	2.17	2.20	2.22	2.21	2.22	\	2.24	2.25	2.26
	125	TC	34.8	35.2	36.0	36.4	36.0	36.4	36.8	37.2	39.6	39.7	39.2	39.3	\	40.9	41.0	41.1
		S/T	1.00	1.00	1.00	1.00	0.62	0.85	1.00	1.00	0.40	0.60	0.79	0.99	\	0.39	0.58	0.76
		kW	2.12	2.14	2.16	2.16	2.16	2.19	2.21	2.23	2.27	2.28	2.27	2.29	\	2.31	2.32	2.33

			Cooling															
1900	5	TC	50.5	51.1	52.2	52.8	52.2	52.8	53.4	54.0	55.9	56.4	56.7	57.1	\	66.9	67.4	68.4
		S/T	0.99	1.00	1.00	1.00	0.61	0.83	1.00	1.00	0.39	0.57	0.73	0.90	\	0.39	0.53	0.67
		kW	1.23	1.24	1.25	1.25	1.25	1.27	1.28	1.29	1.29	1.31	1.32	1.33	\	1.56	1.57	1.49
	25	TC	52.7	53.4	54.5	55.1	54.5	55.1	55.7	56.3	58.4	58.9	59.2	59.6	\	69.8	70.3	71.4
		S/T	0.99	1.00	1.00	1.00	0.61	0.83	1.00	1.00	0.39	0.57	0.73	0.90	\	0.39	0.53	0.67
		kW	1.37	1.38	1.39	1.39	1.39	1.41	1.42	1.44	1.44	1.45	1.47	1.48	\	1.74	1.75	1.66
	50	TC	55.5	56.2	57.3	58.0	57.3	58.0	58.7	59.3	61.5	62.0	62.3	62.8	\	73.5	74.0	75.2
		S/T	0.99	1.00	1.00	1.00	0.64	0.88	1.00	1.00	0.39	0.59	0.78	0.99	\	0.38	0.55	0.71
		kW	1.52	1.53	1.55	1.55	1.55	1.57	1.58	1.60	1.60	1.61	1.63	1.65	\	1.93	1.94	1.84
	75	TC	55.7	56.3	57.7	58.2	57.7	58.2	58.8	59.5	61.8	62.1	62.6	63.1	\	75.3	75.7	75.8
		S/T	0.99	1.00	1.00	1.00	0.63	0.88	1.00	1.00	0.39	0.59	0.78	1.00	\	0.38	0.55	0.71
		kW	1.56	1.58	1.60	1.60	1.60	1.61	1.63	1.65	1.65	1.66	1.68	1.70	\	2.12	2.13	2.13
	85	TC	54.5	55.2	56.3	57.0	56.3	57.0	57.5	58.2	60.5	60.8	61.3	61.6	\	71.0	71.4	71.9
		S/T	0.99	1.00	1.00	1.00	0.64	0.89	1.00	1.00	0.39	0.59	0.79	1.00	\	0.39	0.56	0.73
		kW	1.76	1.78	1.80	1.80	1.80	1.82	1.83	1.86	1.86	1.88	1.89	1.91	\	2.27	2.29	2.30
	95	TC	53.2	53.7	54.9	55.5	54.9	55.5	56.2	56.7	59.0	59.3	59.6	60.1	\	67.6	67.9	67.9
		S/T	1.00	1.00	1.00	1.00	0.64	0.90	1.00	1.00	0.39	0.60	0.80	1.00	\	0.39	0.57	0.75
		kW	2.07	2.09	2.12	2.12	2.12	2.14	2.16	2.18	2.19	2.21	2.22	2.24	\	2.56	2.57	2.57
	105	TC	51.7	52.2	53.4	54.0	53.4	54.0	54.5	55.2	57.3	57.7	58.0	58.5	\	61.8	62.1	61.8
		S/T	1.00	1.00	1.00	1.00	0.65	0.90	1.00	1.00	0.39	0.60	0.81	1.00	\	0.39	0.59	0.79
		kW	2.42	2.44	2.47	2.47	2.47	2.50	2.52	2.55	2.56	2.58	2.60	2.62	\	2.69	2.71	2.66
	115	TC	41.3	41.6	42.6	43.1	42.6	43.1	43.6	43.9	45.9	46.1	46.3	46.6	\	49.2	49.4	49.6
		S/T	1.00	1.00	1.00	1.00	0.66	1.00	1.00	1.00	0.40	0.66	0.93	1.00	\	0.40	0.65	0.90
		kW	2.14	2.16	2.19	2.19	2.19	2.21	2.23	2.25	2.28	2.29	2.30	2.31	\	2.38	2.39	2.40
	125	TC	35.1	35.4	36.2	36.7	36.2	36.7	37.1	37.4	39.0	39.2	39.3	39.6	\	41.8	42.0	42.1
		S/T	1.00	1.00	1.00	1.00	0.62	0.85	1.00	1.00	0.40	0.60	0.79	0.99	\	0.39	0.58	0.76
		kW	2.20	2.22	2.25	2.25	2.25	2.27	2.30	2.32	2.35	2.36	2.37	2.38	\	2.45	2.46	2.47