

SUBMITTAL DATA SHEET

Y-SERIES – HEAT PUMP, 1.5 TON MODEL NO. SPHP-Y-V018BB



84086

Project Name:		Date:	
Location:		Tag #:	
Submitted By:		Approval:	

SPECIFICATIONS


ITEM	UNITS	VALUE
GENERAL		
System Type	-	Split, Central Ducted
Unit Type	-	Outdoor Unit, Heat Pump
Matched Indoor Unit	-	AIRH-Y-V01808CB
Controls Type*1	-	2-Way Communication W/ Matched Indoor Unit, 24V Controls (2H/2C)
Nominal Capacity	BTU/h	18K
COOLING PERFORMANCE*2		
Rated Cooling Capacity*3	BTU/h	18,000
EER2*3	-	11
SEER2*3	-	18.8
Cooling Capacity Range*3	BTU/h	5,350 – 20,000
HEATING PERFORMANCE*2		
Rated Heating Capacity (47°F)*4	BTU/h	18,000
HSPF2*4	-	9.1
COP (47°F)*4	-	3.15
Heating Capacity Range (47°F)*4	BTU/h	5,600 – 19,000
Rated Heating Capacity (17°F)*5	BTU/h	12,600
Rated Heating Capacity (5°F)*6	BTU/h	11,200
COP (5°F)*6	-	2.00
ELECTRICAL		
Input Voltage, Phases, Frequency*7	V, Ph, Hz	208-230, 1, 60
Input Power	kW	0.34 – 1.9
Minimum Circuit Ampacity (MCA)	A	16
Maximum Overcurrent Protection (MOCP)	A	20
COMPRESSOR		
Type	-	Rotary, Inverter, DC, Variable
Crankcase Heater	-	Yes
Refrigerant Oil Type	-	VG74
Refrigerant Oil Amount	fl oz	14.8
Rated Load Amps	A	10
COIL		
Type	-	Fin & Tube
Fin Material	-	Aluminum
Tube Material	-	Copper

NOTES:

*1. 2-Way communication is required for full capability. Performance is reduced with 24V controls. Refer to *Installation Instructions*. *2. Based on matched system rating. Refer to AHRI directory. * Where indicated, specifications apply at the following conditions and temperatures: *3. Indoor DB 80°F/WB 67°F, Outdoor DB 95°F/WB 75°F; *4. Indoor DB 70°F/WB 60°F, Outdoor DB 47°F/WB 43°F; *5. Indoor DB 70°F/WB 60°F, Outdoor DB 17°F/WB 15°F; *6. Indoor DB 70°F/WB 60°F, Outdoor DB 5°F/WB 5°F. *7. Operating voltage is 187-253 VAC.

ITEM	UNITS	VALUE
OUTDOOR FAN(S)		
Motor Type	-	Brushless DC, Variable
Airflow	CFM	1,451 (Max)
Fan Diameter X Width	in	17-1/16 X 5-11/16
Motor Speed	RPM	840 (Max)
Motor Power	W	34
Full Load Amps	A	0.8
REFRIGERATION SYSTEM		
Refrigerant	-	R-454B
Refrigerant Pre-Charge	lb – oz	3 – 3.2
Pre-Charged for Lineset Length	ft	24.5
Additional Charge Per ft	oz/ft	0.7
Max Lineset Length	ft	98.5
Max Height Difference	ft	65.5
Connection Method	-	Flared
Liquid Connection Size (OD)	in	3/8
Vapor Connection Size (OD)	in	3/4
Metering Device	-	EEV
OPERATING RANGE		
Outdoor Temperature (Cooling)	°F	-13 – 122
Outdoor Temperature (Heating)	°F	-13 – 75
NOISE LEVEL		
Sound Pressure Level	dB(A)	55

DIMENSIONS AND WEIGHT

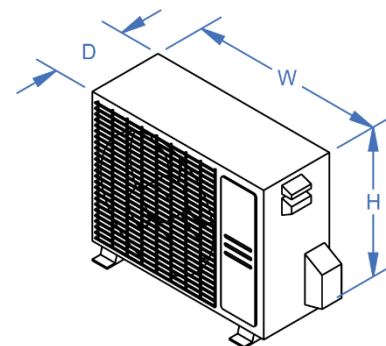

NOTE: Image for reference only. Actual appearance may vary.

ITEM	UNITS	VALUE
Height (H)	in	21-13/16
Width (W)	in	31-11/16
Depth (D)	in	13
Weight	lb	77.5