

SUBMITTAL DATA SHEET

M4+ Heat Pump Floor Ceiling Split System



Outdoor	Indoor	Controls	
			
		Remote Control (Included)	Wired Thermostat (Optional)

Outdoor Key Features	Indoor Key Features
• Eco-Friendly R454B Refrigerant • Advanced Inverter Technology • Anti-Corrosive Gold-Fin Coating • Thin and Compact Design • Intelligent Defrosting • 3 Minutes Restart Delay • Quiet Operation • Heating operation at -13°F (M4) or -22°F (M4+) • Auto-Restart • Outdoor Reverse Fan operation • Drain Pan Heater and Compressor Heating Belt • *10 Year Warranty	• Factory installed R454B Leak Sensor • Wide Air-Flow Distribution • Floor or Ceiling Application • 60% Universal Spare Spares for 3 different bodies • LED Display • Fresh Air Intake Availability • 3D Vertical and Horizontal Air Flow • 5 Modes: Auto, Cool, Heat, Dry, Fan • Slim Design • Other Included Modes: Sleep, Timer, Follow Me, Turbo, Eco • Large LED Remote • *10 Year Warranty

Accessories

7 Day Programmable Thermostat Kit


Model	Description
17317100009536	• Direct wiring connection to M4 Series. No adapter needed • Large Display • Wi-Fi compatible with Amazon, Alexa, Google Home, Apple Home • Includes 19.5ft communication cable

24V Mini Adapter


Model	Description
17222000A68532	• Adapts M4 indoors to work with 24V thermostats • Compact Design for easy installation

Dr. Smart Diagnostic Tool


Model	Description
17222000A55927	• Diagnostic tool for SLIM & M4 Series • Real-Time System Communication & Simulations • Easy Navigation with Display • Lightweight with Built-in Magnets

* Warranty subject to terms and conditions. Customer is responsible for remaining up to date on all warranty requirements. Warranty is valid only when all conditions outlined in the official warranty documentation are met. Current warranty details available at <https://innovair.com/warranty/>

SUBMITTAL DATA SHEET



Series Name: M4+ Floor & Ceiling System
Model Number: MOS18H2BH0A/MFC18H2BHRA

M4+ Floor & Ceiling System	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



EFFICIENCY			
Cooling		Heating	
SEER2	20.4	HSPF2-4	10.3
EER2	12.5	COP	1.86

PERFORMANCE of Cooling	
Cooling (Btu/hr)	
Rated Capacity	17000
Min/Max Capacity	7400~19200
Moisture Removal(L/h)	1.73
Standard Operating Range(°F/°C)	-22~122(-30~50)
Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating	
Heating (Btu/hr)	
1. @ 47°F Rated	19000
1. @ 47°F Min/Max Capacity	8300~20700
2. @ 17°F Rated	14400
3. @ 5°F Rated: Capacity / COP	17000/1.86
3. @ 5°F Max: Capacity	17000
Standard Operating Range(°F/°C)	-22~75(-30~24)
1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB


INDOOR SPECIFICATION		
Air Flow (Turbo/H/M/L/Si) (CFM)		576.8 / 547.4 / 485.6 / 420.8 / N/A
Noise Level (Turbo/H/M/L/Si) (dBA)		45/42.5/39.5/30.5/29.0
Dimension (W×D×H)	inch	42.05 x 26.57 x 9.25
	mm	1068.0×675.0×235.0
Package (W×D×H)	inch	45.08 x 29.72 x 12.52
	mm	1145×755×318
Net/Gross Weight	lbs	58.42/70.55
	kg	26.5/32.0

OUTDOOR SPECIFICATION		
Compressor Type		ROTARY
Compressor Model		KTM240D46UKT2
Refrigerant		R454B
Refrigerant Oil Charge(mL)		620
Refrigerant Oil		VG74
Outdoor Air Flow (Max) (CFM)		1765.8
Outdoor Noise Level (dBA)		58.0
Dimension (W×D×H)	inch	35.04 x 13.46 x 26.50
	mm	890.0×342.0×673.0
Package (W×D×H)	inch	39.17 x 15.67 x 29.13
	mm	995×398×740
Net/Gross Weight	lbs	99.87/107.80
	kg	45.3/48.9

ELECTRICAL	
Power Supply	208/230V,60Hz,1Ph
System MCA	19.00
Connection Wiring	14#x4
System MOCP	20
Compressor RLA	11.7
Outdoor Fan Motor RLA	0.9
Outdoor Fan Motor W	80
Indoor Fan Motor RLA	1.0
Indoor Fan Motor W	90
System Power Input @ Cooling (W)	1350(500 ~ 1670)
System Power Input @ Heating (W)	1814(525 ~1830)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)


PIPING	
Throttle type(Indoor)	N/A
Throttle type(Outdoor)	EXV+Throttle valve
Liquid Size	6.35mm(1/4in)
Gas Size	12.7mm(1/2in)
Max. Piping Length(ft/m)	98.40(30)
Max. Height Difference(ft/m)	65.60(20)
Max. Pre-charged Length(ft/m)	24.6(7.5)
Refrigerant Pre-charged Amount(oz/kg)	55.38(1.57)
Additional Charge of Refrigerant((oz/ft)/(g/m))	0.16(15)
Connection Method	Flared

Indoor Unit Dimension

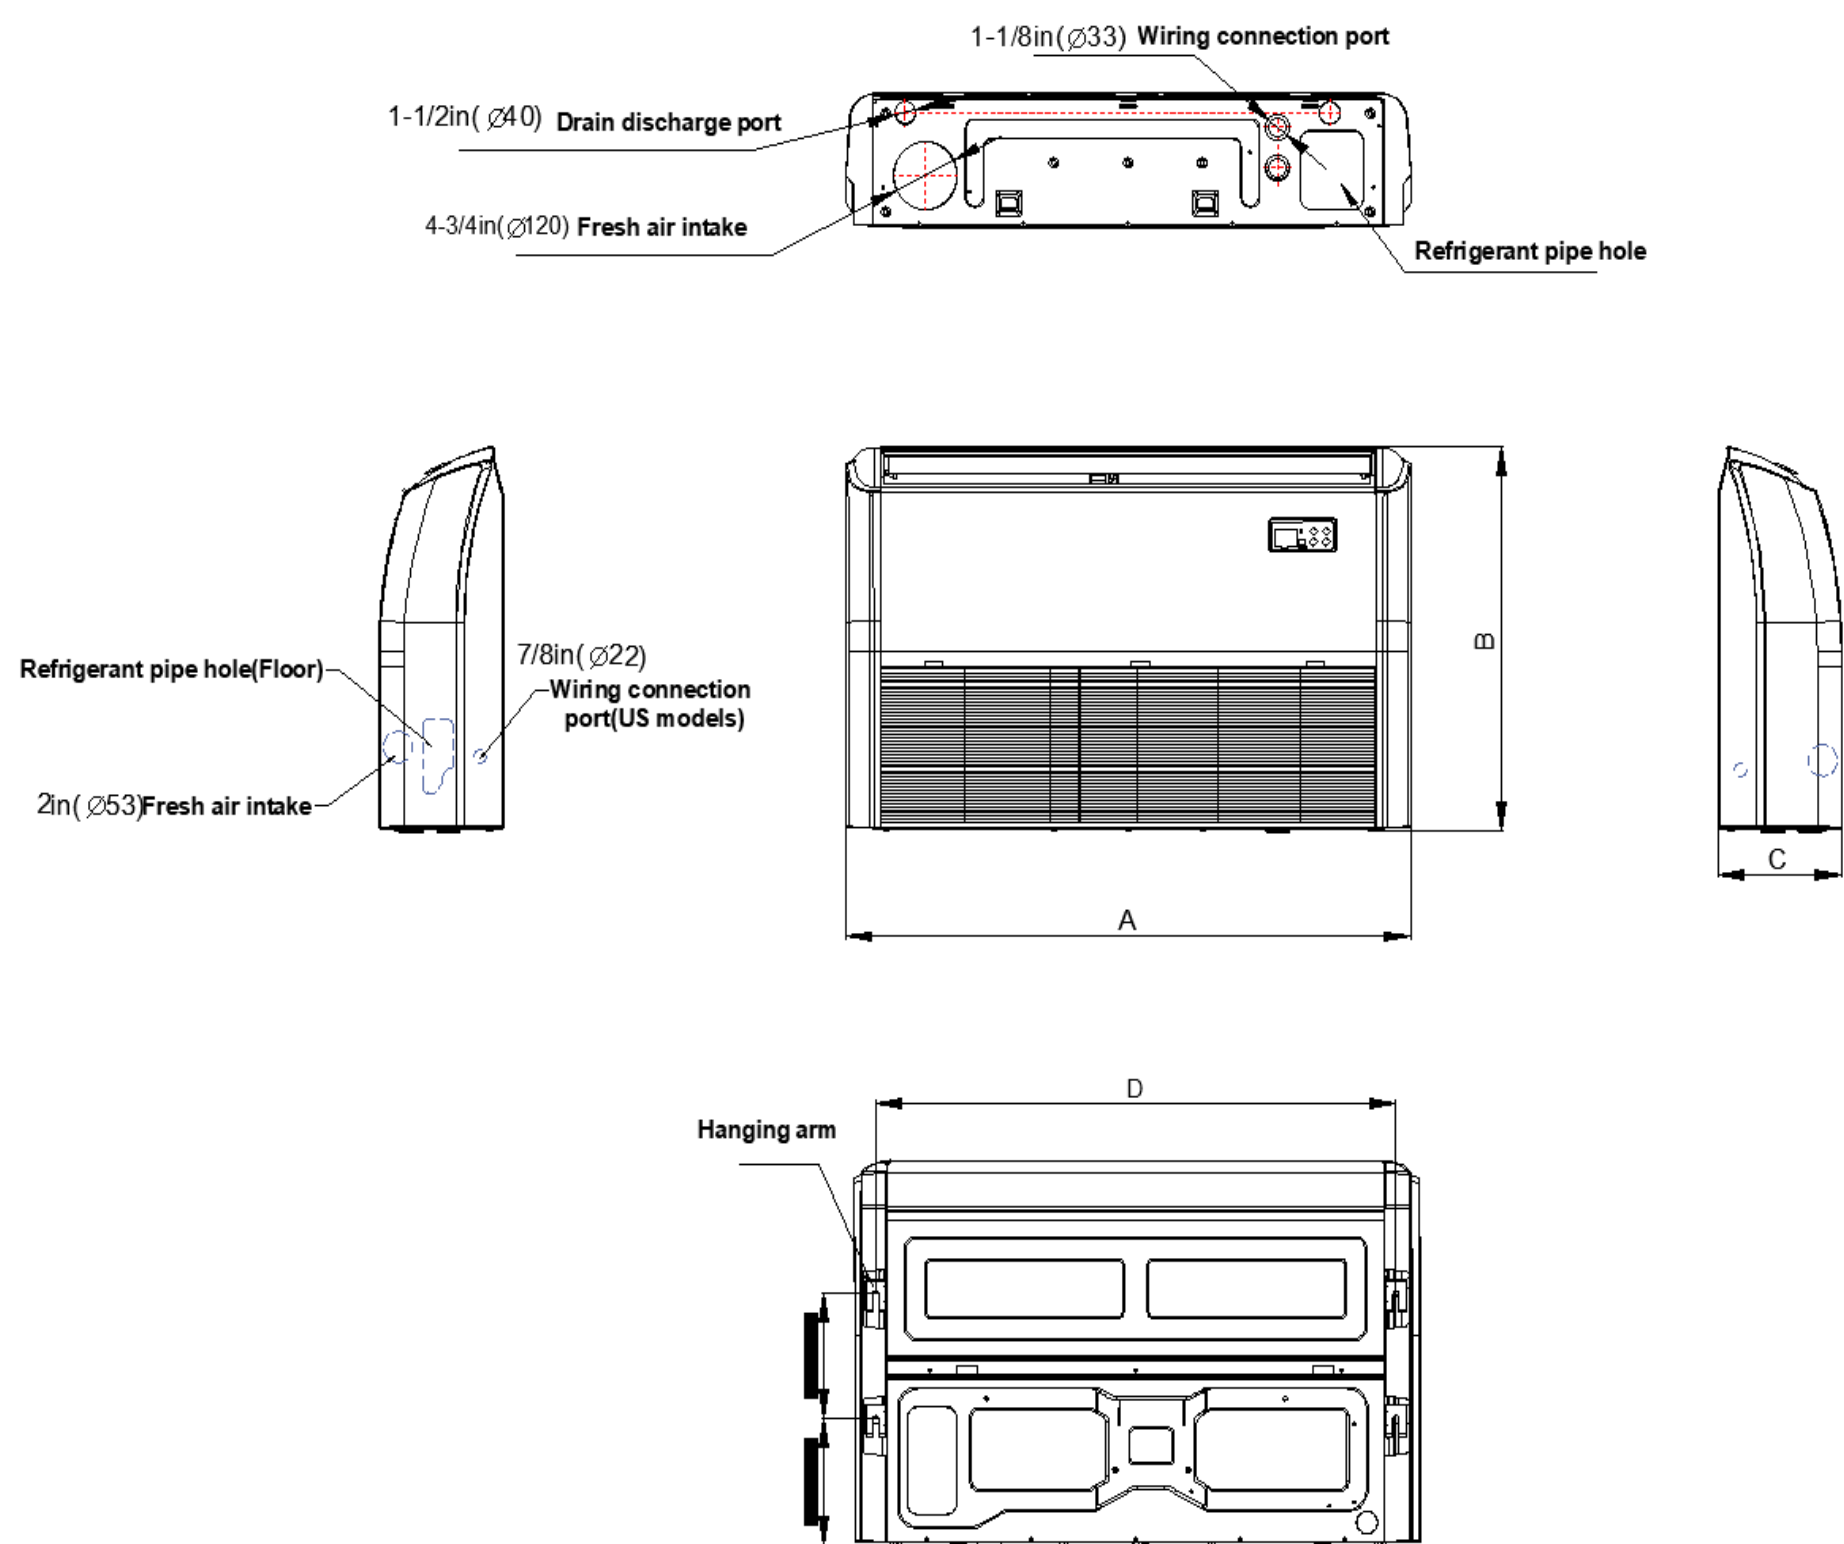



Model	A	B	C	D
18K/24K	42in(1068mm)	26-1/2in(675mm)	9-1/4in(235mm)	38-3/4in(983mm)
36K/48K/60K	65in(1650mm)	26-1/2in(675mm)	9-1/4in(235mm)	61-5/8in(1565mm)

Installation Instruction

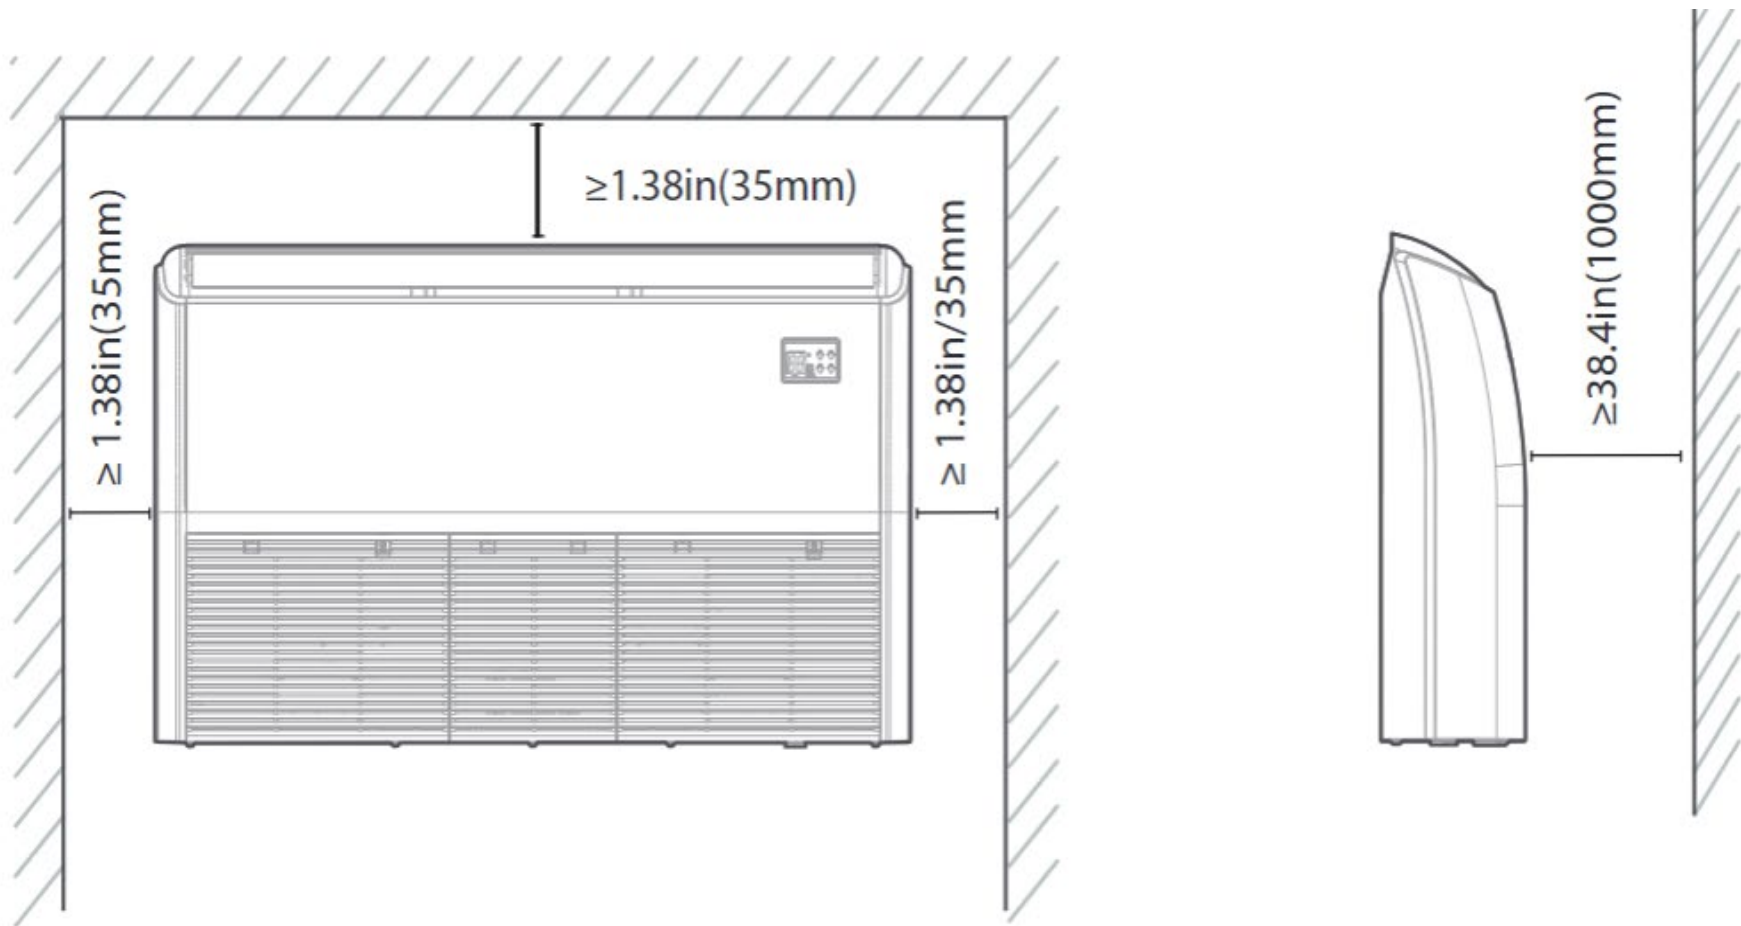

Outdoor Unit Dimension

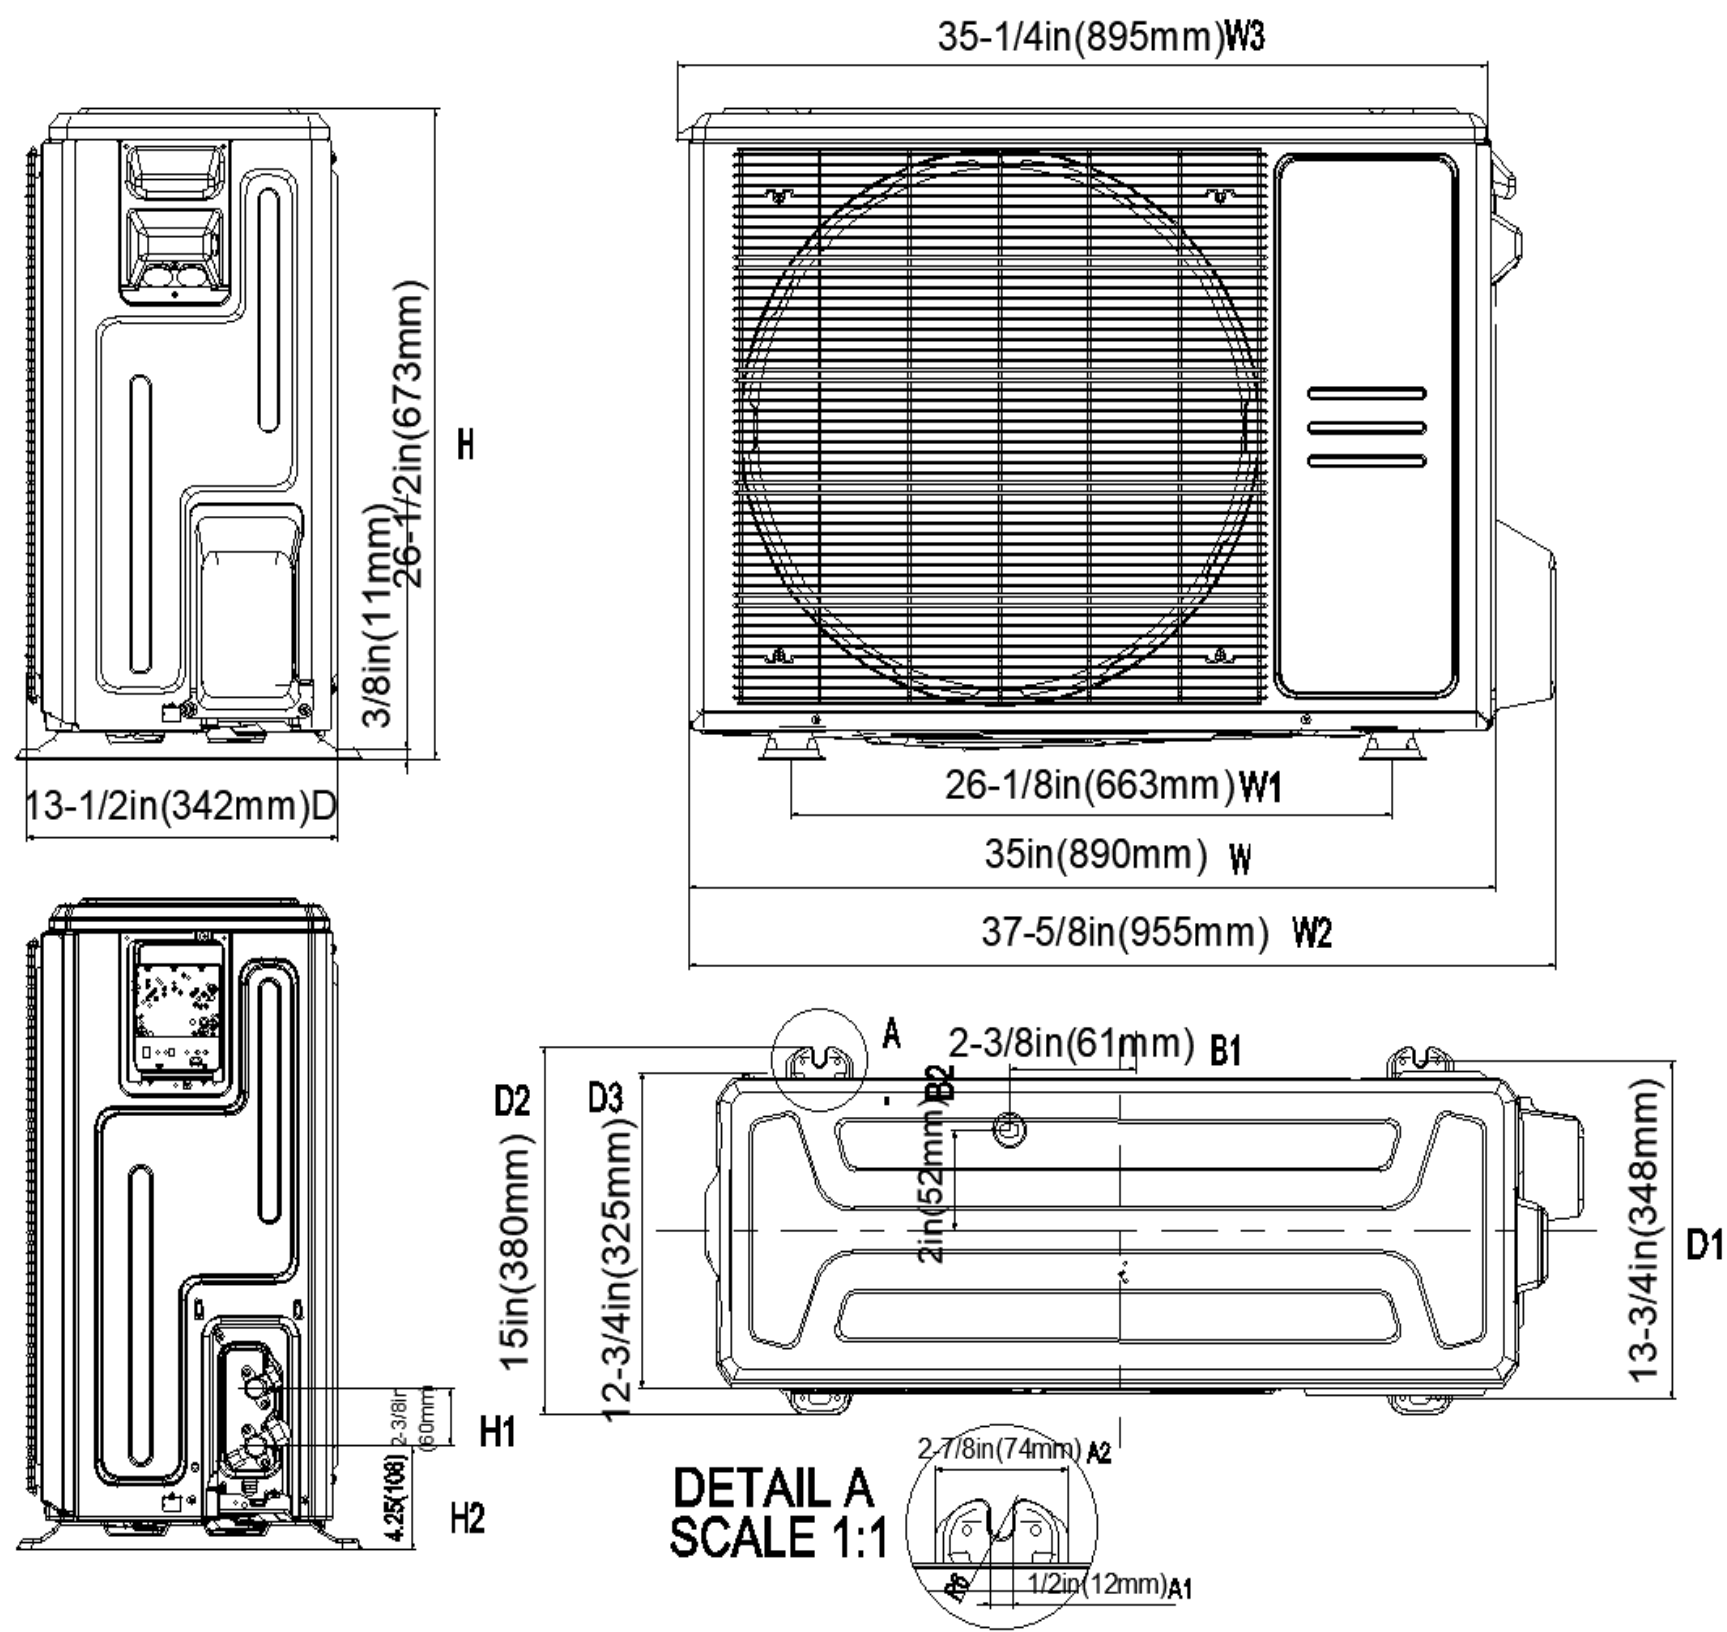

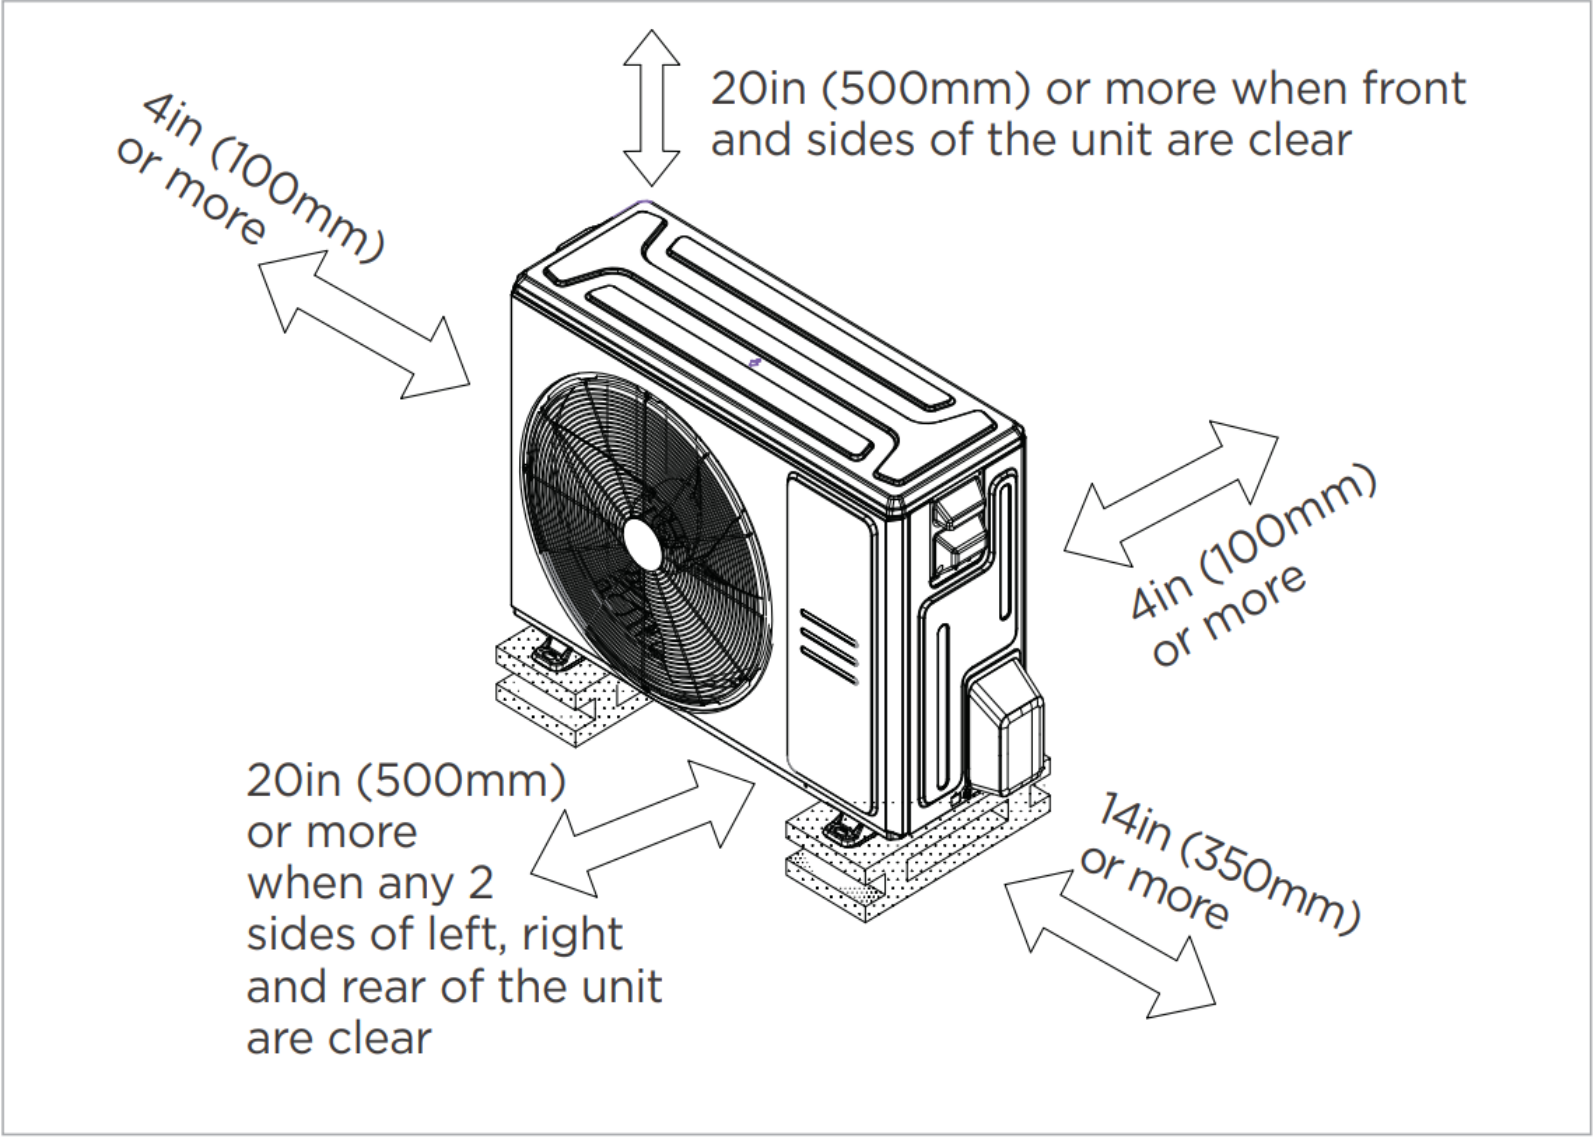

☒ Meets all spatial requirements shown in Installation Clearance Requirements above.

SUBMITTAL DATA SHEET



Series Name: M4+ Floor & Ceiling System
Model Number: MOS24H2BH0A/MFC24H2BHRA

M4+ Floor & Ceiling System	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



EFFICIENCY			
Cooling		Heating	
SEER2	20.4	HSPF2-4	12.1
EER2	12.0	COP	2.16

PERFORMANCE of Cooling	
Cooling (Btu/hr)	
Rated Capacity	22000
Min/Max Capacity	12700~25600
Moisture Removal(L/h)	2.73
Standard Operating Range(°F/°C)	-22~122(-30~50)
Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating	
Heating (Btu/hr)	
1. @ 47°F Rated	26000
1. @ 47°F Min/Max Capacity	11300~29500
2. @ 17°F Rated	20200
3. @ 5°F Rated: Capacity / COP	24200/2.16
3. @ 5°F Max: Capacity	24200
Standard Operating Range(°F/°C)	-22~75(-30~24)
1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB


INDOOR SPECIFICATION		
Air Flow (Turbo/H/M/L/Si) (CFM)		735.8 / 706.3 / 606.3 / 453.2 / 376.7
Noise Level (Turbo/H/M/L/Si) (dBA)		51.5/49.0/45.0/34.0/29.0
Dimension (W×D×H)	inch	42.05 x 26.57 x 9.25
	mm	1068.0×675.0×235.0
Package (W×D×H)	inch	45.08 x 29.72 x 12.52
	mm	1145×755×318
Net/Gross Weight	lbs	61.29/73.19
	kg	27.8/33.2

OUTDOOR SPECIFICATION		
Compressor Type		ROTARY
Compressor Model		KTM240D46UKT2
Refrigerant		R454B
Refrigerant Oil Charge(mL)		620
Refrigerant Oil		VG74
Outdoor Air Flow (Max) (CFM)		2236.7
Outdoor Noise Level (dBA)		61.5
Dimension (W×D×H)	inch	37.24 x 16.14 x 31.89
	mm	946.0×410.0×810.0
Package (W×D×H)	inch	42.91 x 19.68 x 34.84
	mm	1090×500×885
Net/Gross Weight	lbs	130.29/141.31
	kg	59.1/64.1

ELECTRICAL	
Power Supply	208/230V,60Hz,1Ph
System MCA	24.90
Connection Wiring	14#x4
System MOCP	25
Compressor RLA	15.0
Outdoor Fan Motor RLA	1.3
Outdoor Fan Motor W	120
Indoor Fan Motor RLA	1.0
Indoor Fan Motor W	90
System Power Input @ Cooling (W)	1833(980 ~ 2300)
System Power Input @ Heating (W)	2194(630 ~2570)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)


PIPING	
Throttle type(Indoor)	N/A
Throttle type(Outdoor)	EXV+Throttle valve
Liquid Size	9.52mm(3/8in)
Gas Size	15.9mm(5/8in)
Max. Piping Length(ft/m)	164.00(50)
Max. Height Difference(ft/m)	82.00(25)
Max. Pre-charged Length(ft/m)	24.6(7.5)
Refrigerant Pre-charged Amount(oz/kg)	63.49(1.80)
Additional Charge of Refrigerant((oz/ft)/(g/m))	0.32(30)
Connection Method	Flared

Indoor Unit Dimension

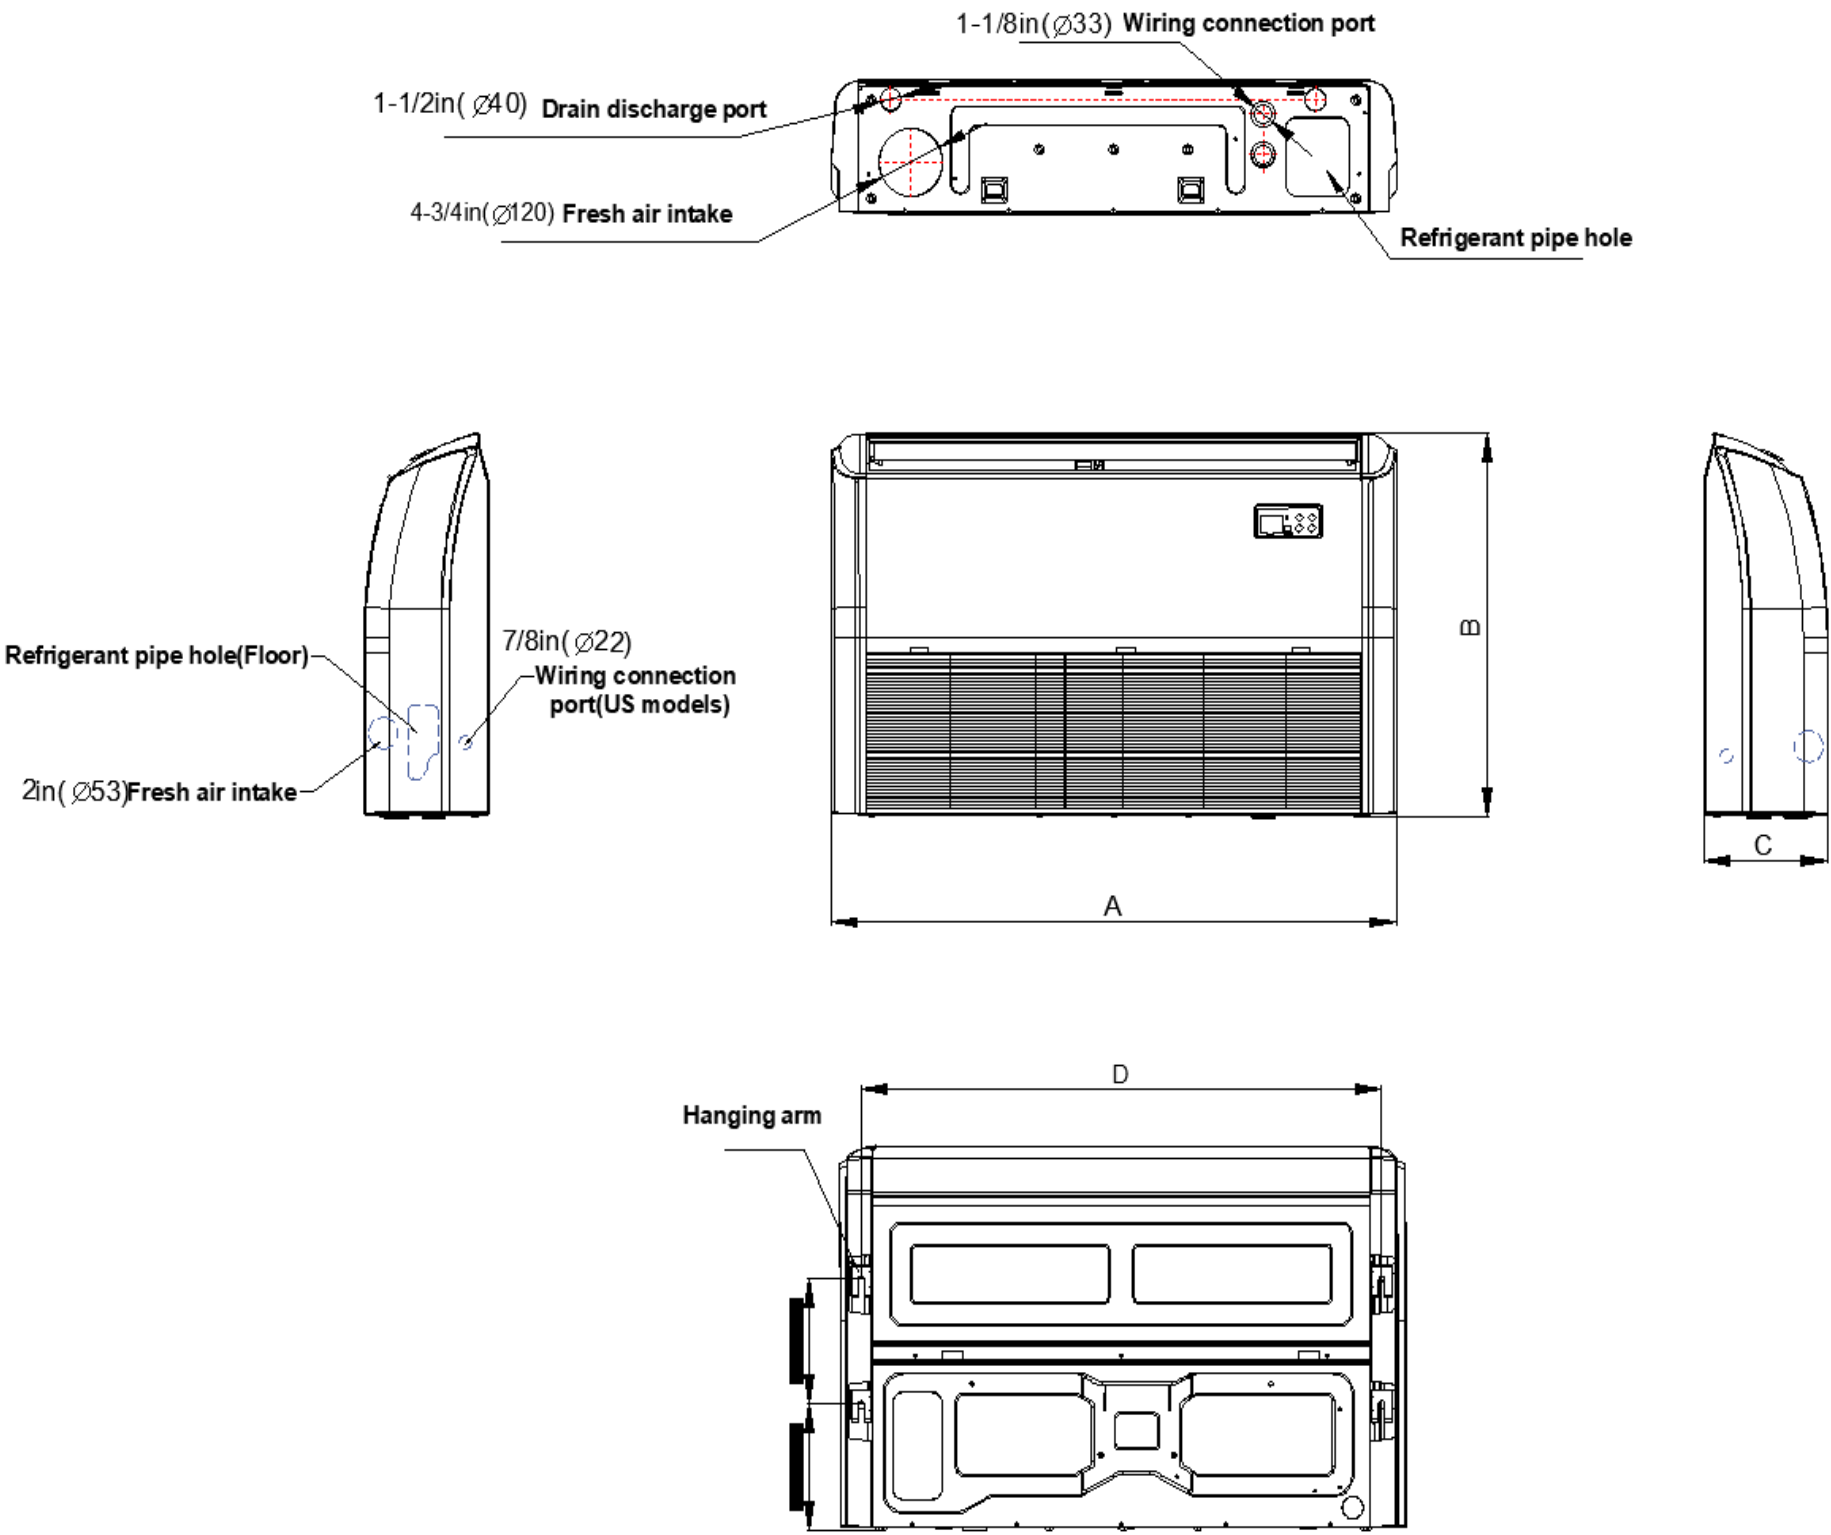



Model	A	B	C	D
18K/24K	42in(1068mm)	26-1/2in(675mm)	9-1/4in(235mm)	38-3/4in(983mm)
36K/48K/60K	65in(1650mm)	26-1/2in(675mm)	9-1/4in(235mm)	61-5/8in(1565mm)

Installation Instruction

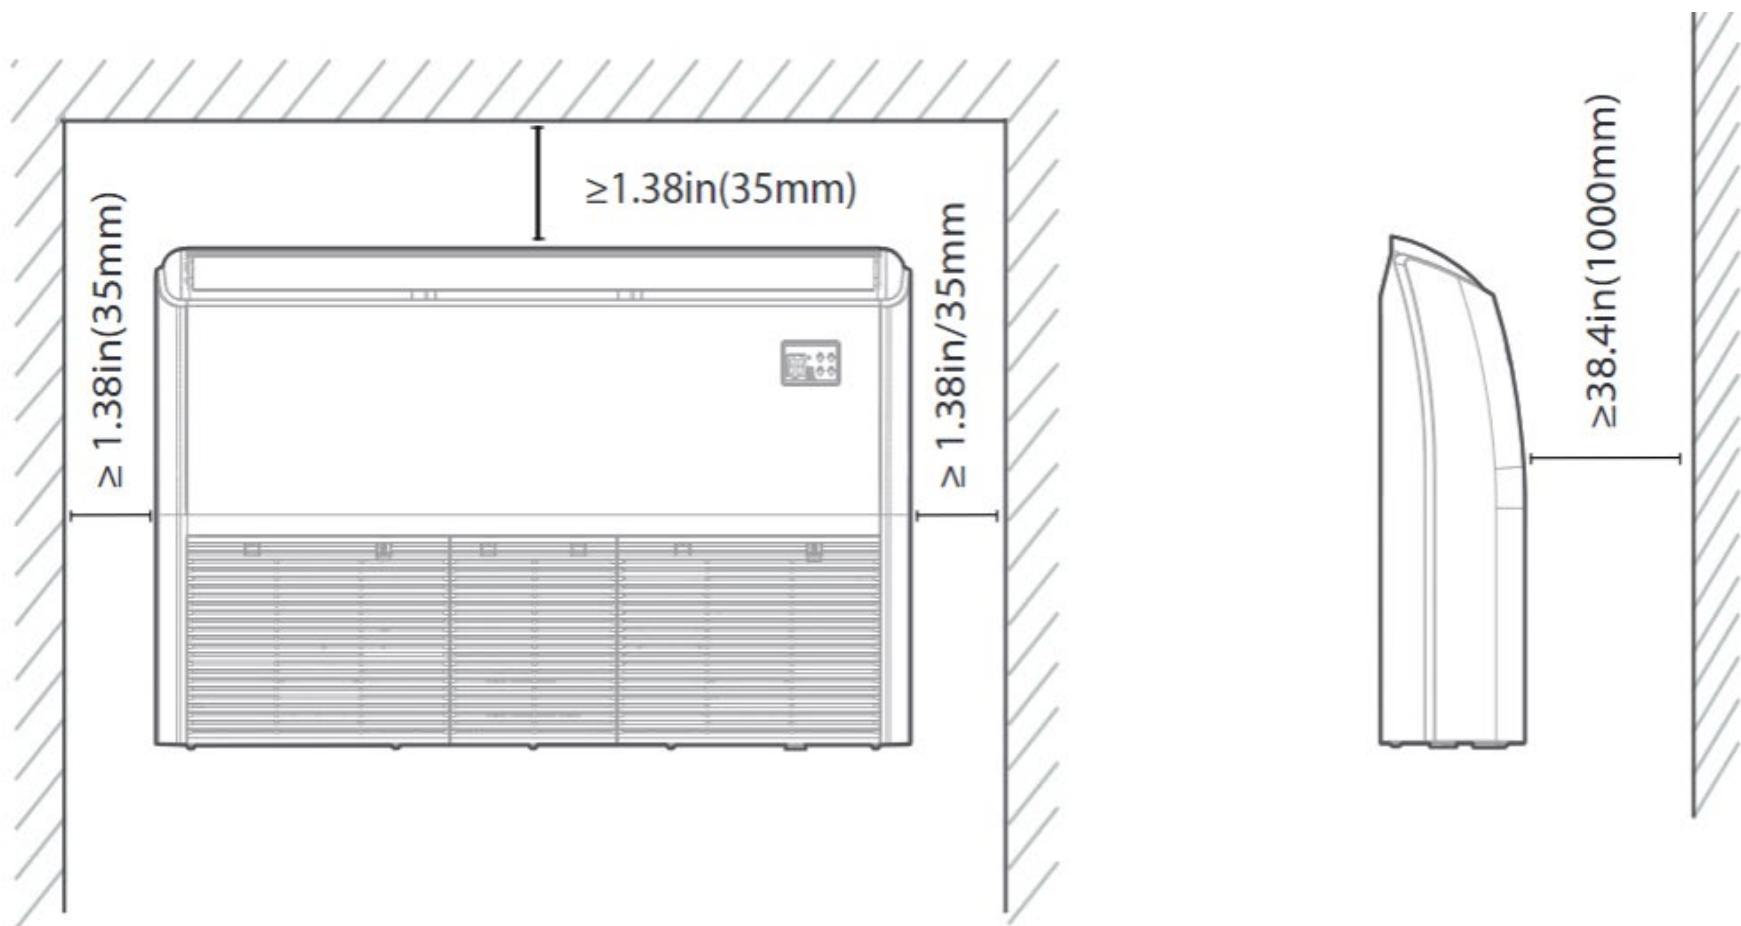

Outdoor Unit Dimension

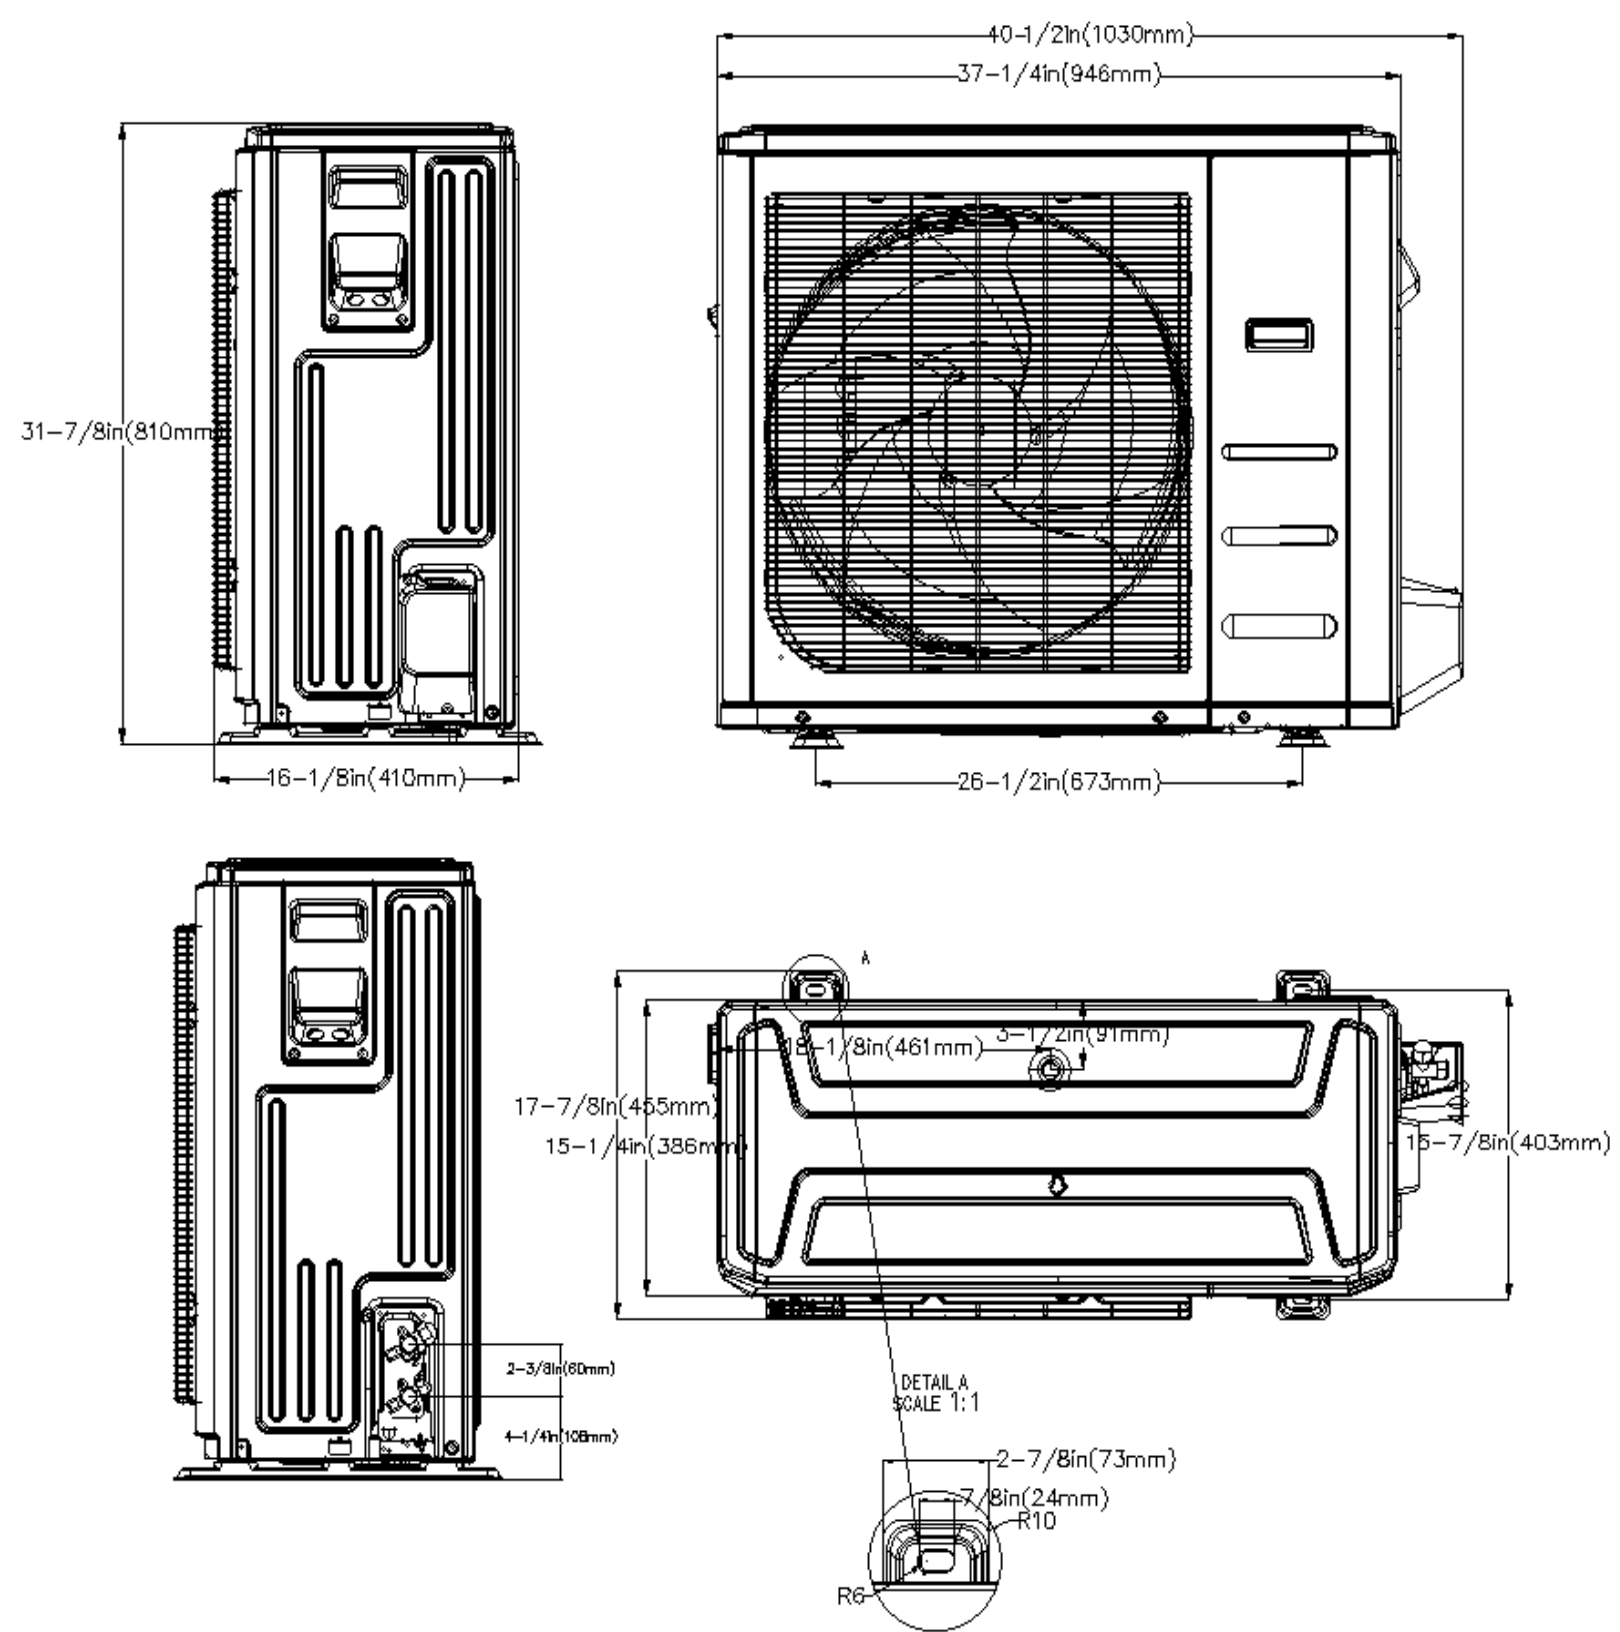

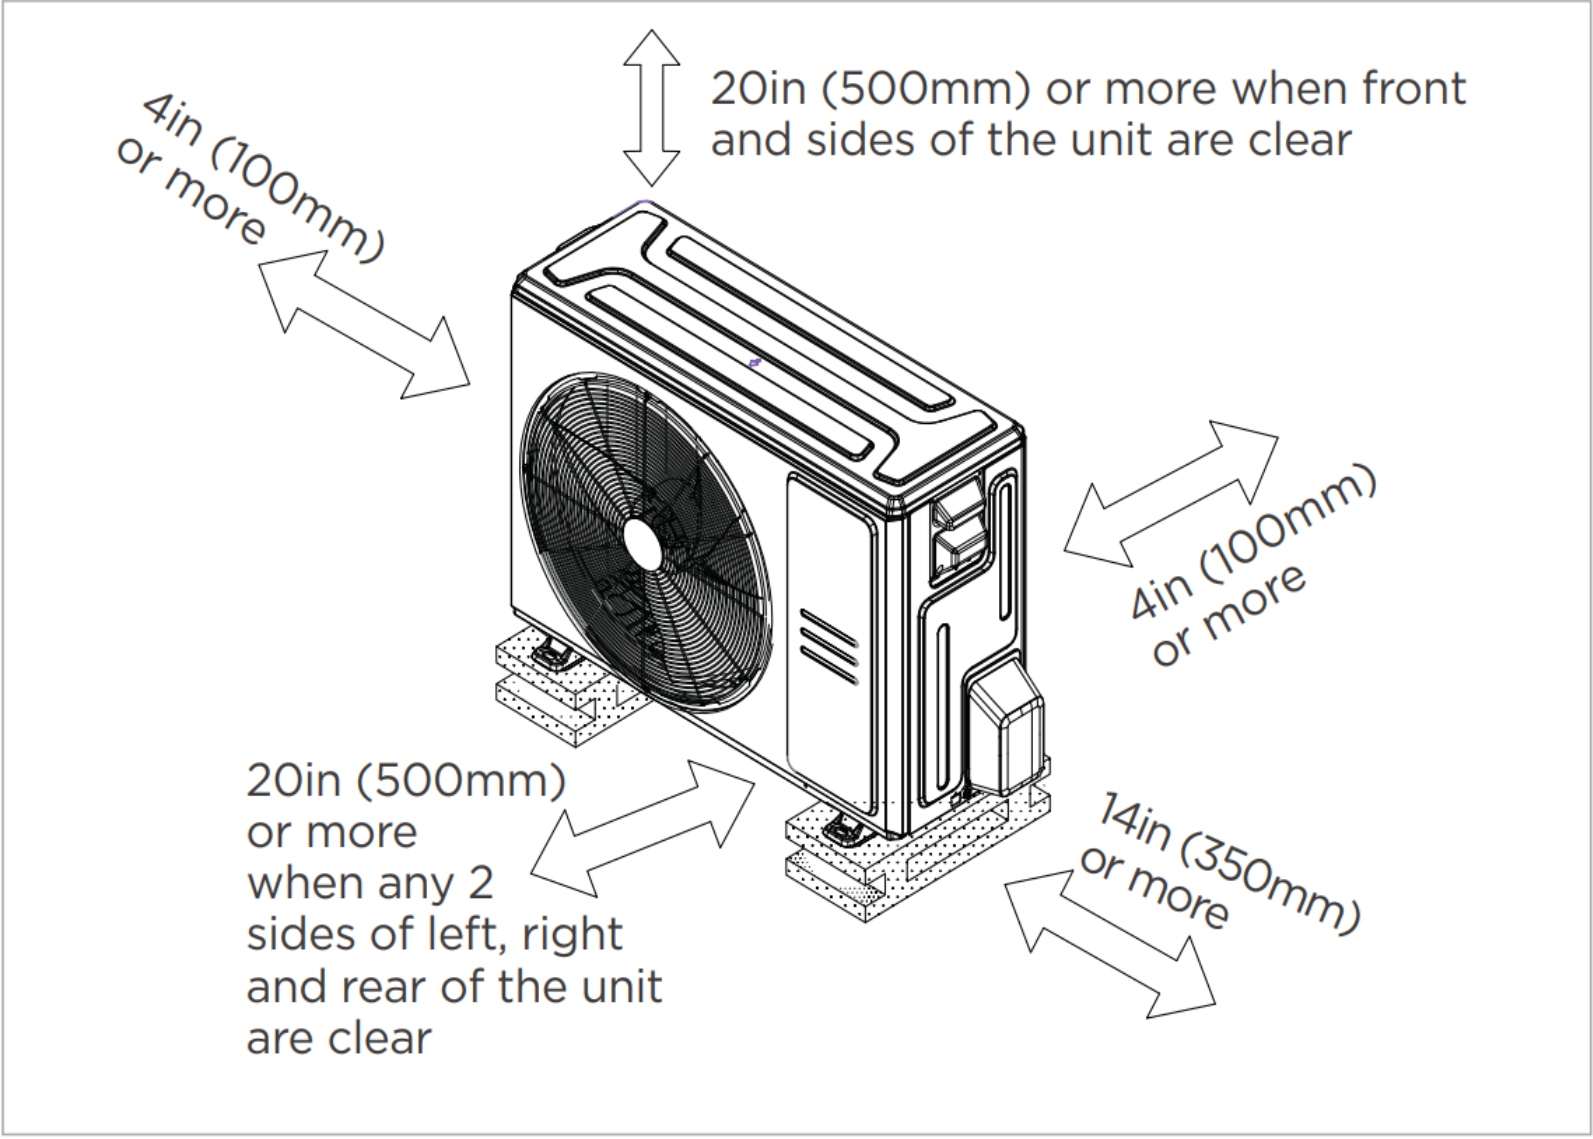

☒ Meets all spatial requirements shown in Installation Clearance Requirements above.

SUBMITTAL DATA SHEET



Series Name: M4+ Floor & Ceiling System
Model Number: [MOS36H2BH0A/MFC36H2BHRA](#)

M4+ Floor & Ceiling System	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



EFFICIENCY			
Cooling		Heating	
SEER2	20	HSPF2-4	10.8
EER2	12.0	COP	2.02

PERFORMANCE of Cooling	
Cooling (Btu/hr)	
Rated Capacity	36400
Min/Max Capacity	6100~38300
Moisture Removal(L/h)	3.10
Standard Operating Range(°F/°C)	-22~122(-30~50)
Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating	
Heating (Btu/hr)	
1. @ 47°F Rated	38000
1. @ 47°F Min/Max Capacity	11100~45400
2. @ 17°F Rated	30200
3. @ 5°F Rated: Capacity / COP	39500/2.02
3. @ 5°F Max: Capacity	39500
Standard Operating Range(°F/°C)	-22~75(-30~24)
1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB


INDOOR SPECIFICATION		
Air Flow (Turbo/H/M/L/Si) (CFM)		1224.3 / 1088.9 / 988.8 / 765.2 / 653.3
Noise Level (Turbo/H/M/L/Si) (dBA)		51/51/45.5/39/35
Dimension (W×D×H)	inch	64.96 x 26.57 x 9.25
	mm	1650.0×675.0×235.0
Package (W×D×H)	inch	67.91 x 29.72 x 12.52
	mm	1725×755×318
Net/Gross Weight	lbs	88.85/104.94
	kg	40.3/47.6

OUTDOOR SPECIFICATION		
Compressor Type		TWIN-ROTARY
Compressor Model		EKPQ420D1UMUA
Refrigerant		R454B
Refrigerant Oil Charge(mL)		1460
Refrigerant Oil		VG75
Outdoor Air Flow (Max) (CFM)		3001.9
Outdoor Noise Level (dBA)		65.0
Dimension (W×D×H)	inch	38.58 x 16.34 x 38.39
	mm	980.0×415.0×975.0
Package (W×D×H)	inch	45.08 x 19.68 x 42.52
	mm	1145×500×1080
Net/Gross Weight	lbs	206.57/237.44
	kg	93.7/107.7

ELECTRICAL	
Power Supply	208/230V,60Hz,1Ph
System MCA	38.00
Connection Wiring	14#x3
System MOCP	40
Compressor RLA	24.5
Outdoor Fan Motor RLA	2.1
Outdoor Fan Motor W	250
Indoor Fan Motor RLA	1.0
Indoor Fan Motor W	90
System Power Input @ Cooling (W)	3033(590 ~ 3610)
System Power Input @ Heating (W)	3385(675 ~4070)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)


PIPING	
Throttle type(Indoor)	N/A
Throttle type(Outdoor)	EXV+Throttle valve
Liquid Size	9.52mm(3/8in)
Gas Size	19mm(3/4in)
Max. Piping Length(ft/m)	246.00(75)
Max. Height Difference(ft/m)	98.40(30)
Max. Pre-charged Length(ft/m)	24.6(7.5)
Refrigerant Pre-charged Amount(oz/kg)	126.99(3.60)
Additional Charge of Refrigerant((oz/ft)/(g/m))	0.32(30)
Connection Method	Flared

Indoor Unit Dimension

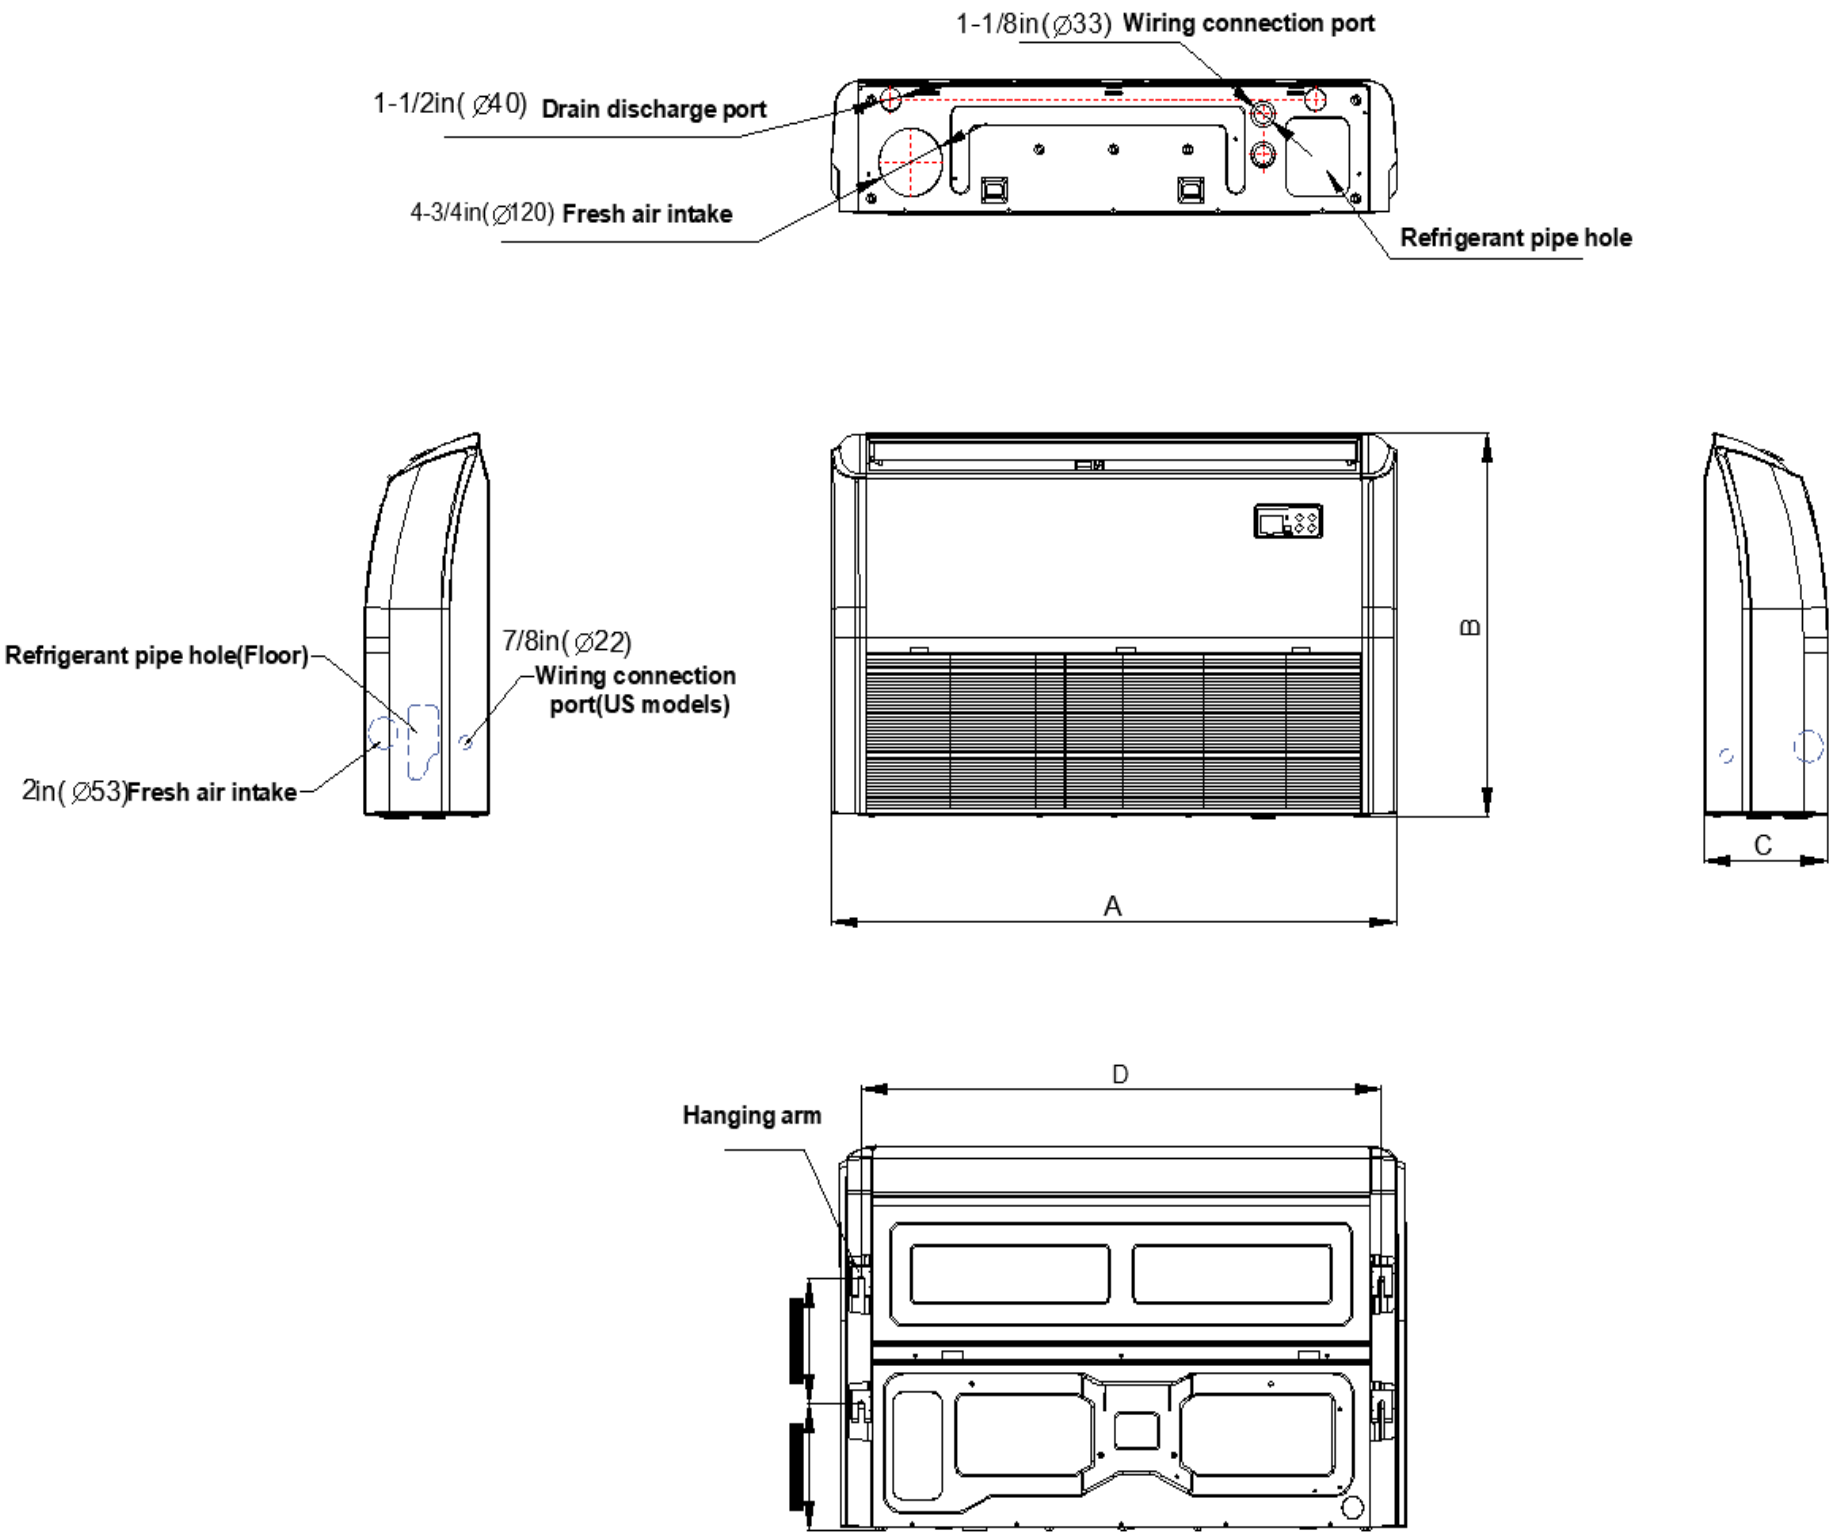



Model	A	B	C	D
18K/24K	42in(1068mm)	26-1/2in(675mm)	9-1/4in(235mm)	38-3/4in(983mm)
36K/48K/60K	65in(1650mm)	26-1/2in(675mm)	9-1/4in(235mm)	61-5/8in(1565mm)

Installation Instruction

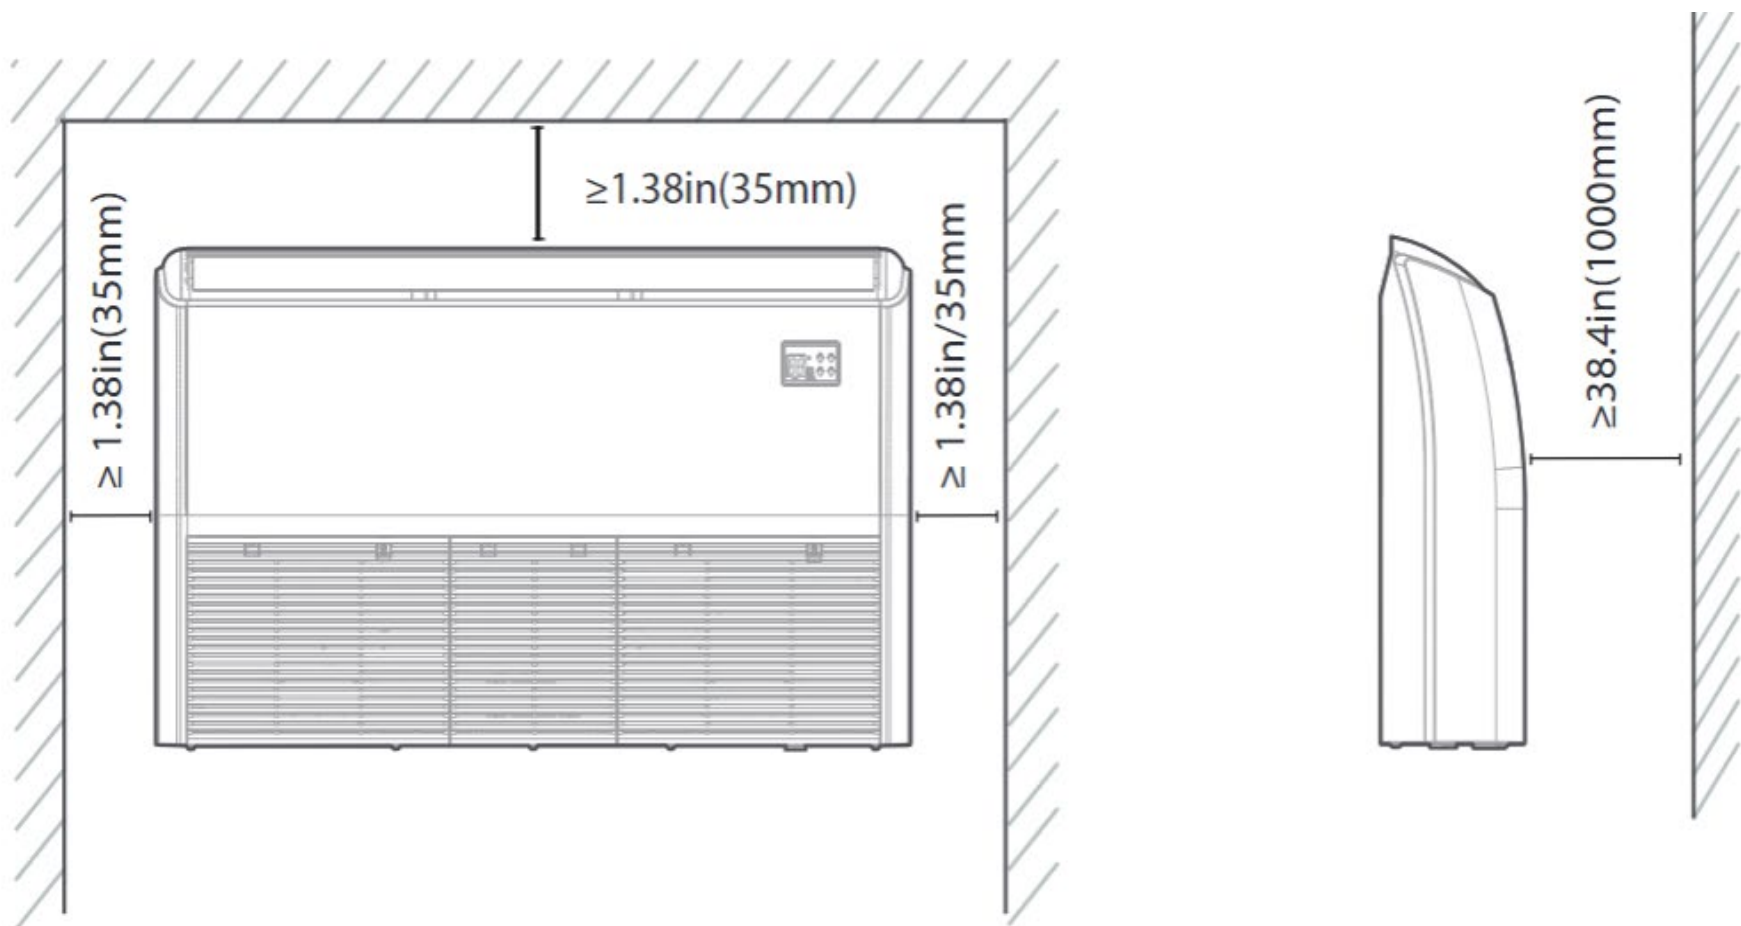

Outdoor Unit Dimension

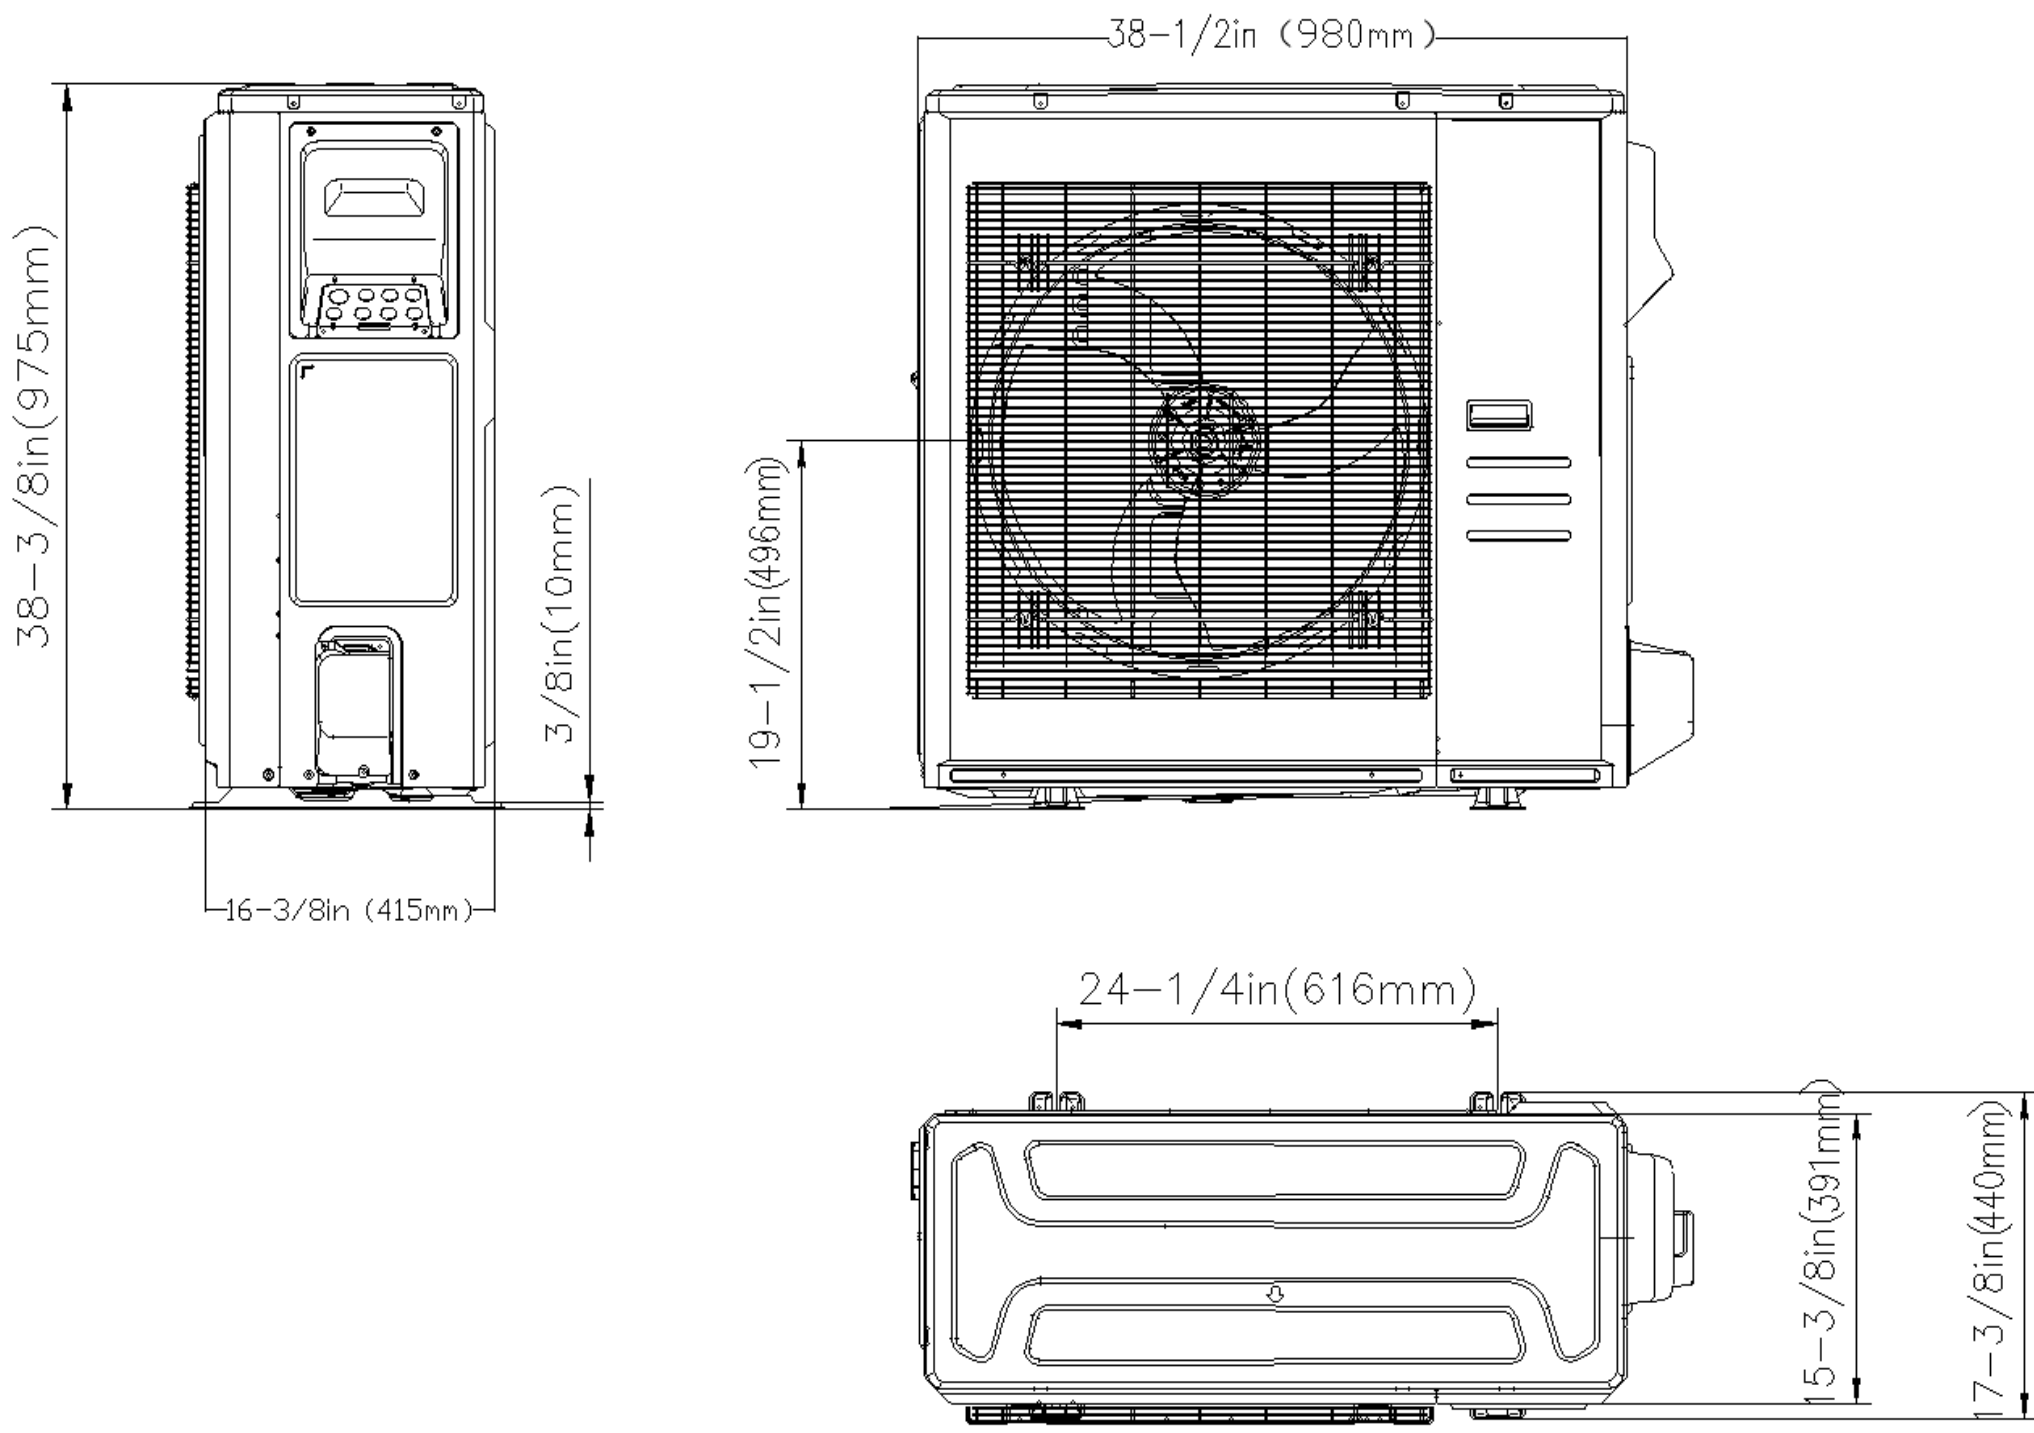

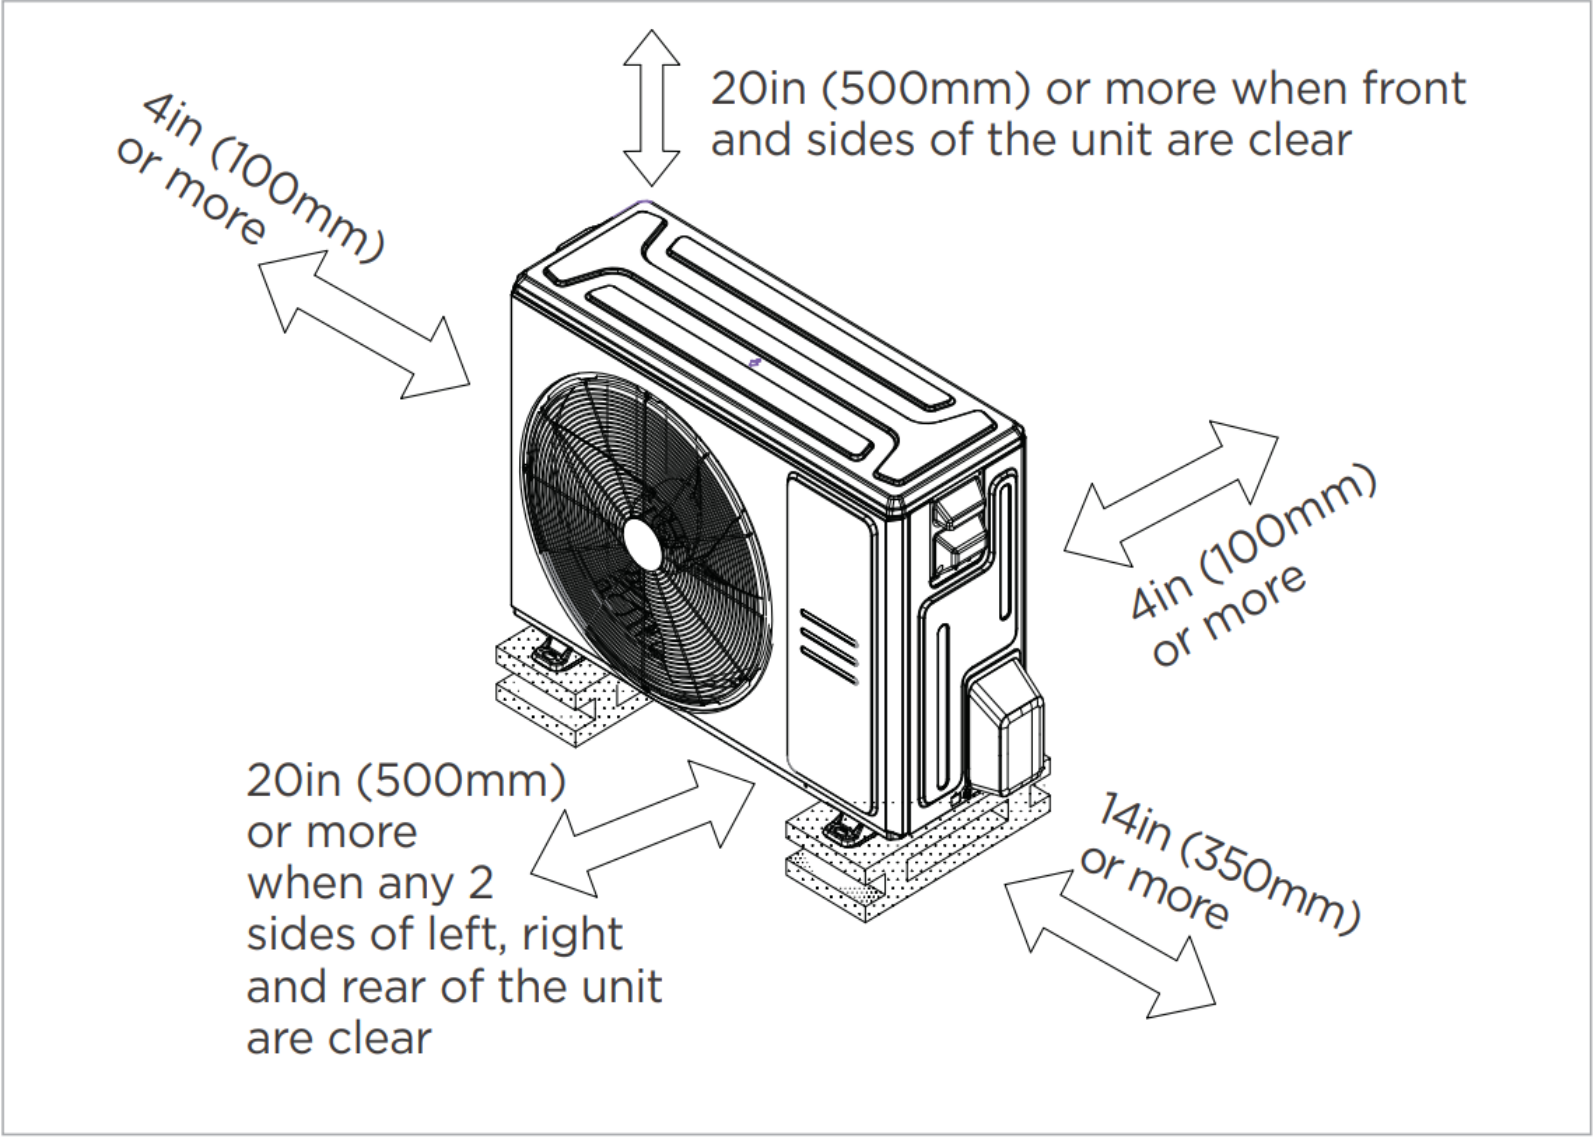

☒ Meets all spatial requirements shown in Installation Clearance Requirements above.

SUBMITTAL DATA SHEET



Series Name: M4+ Floor & Ceiling System
Model Number: [MOS48H2BH0A/MFC48H2BHRA](#)

M4+ Floor & Ceiling System	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



EFFICIENCY			
Cooling		Heating	
SEER2	18.5	HSPF2-4	10.1
EER2	9.4	COP	1.83

PERFORMANCE of Cooling	
Cooling (Btu/hr)	
Rated Capacity	48000
Min/Max Capacity	6700~53500
Moisture Removal(L/h)	6.32
Standard Operating Range(°F/°C)	-22~122(-30~50)
Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating	
Heating (Btu/hr)	
1. @ 47°F Rated	52000
1. @ 47°F Min/Max Capacity	18800~58700
2. @ 17°F Rated	38500
3. @ 5°F Rated: Capacity / COP	47000/1.83
3. @ 5°F Max: Capacity	47000
Standard Operating Range(°F/°C)	-22~75(-30~24)
1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB


INDOOR SPECIFICATION		
Air Flow (Turbo/H/M/L/Si) (CFM)		1353.8/1236/1083/800.5/ 665
Noise Level (Turbo/H/M/L/Si) (dBA)		54/53/48.5/39/35
Dimension (W×D×H)	inch	64.96 x 26.57 x 9.25
	mm	1650.0×675.0×235.0
Package (W×D×H)	inch	67.91 x 29.72 x 12.52
	mm	1725×755×318
Net/Gross Weight	lbs	89.07/105.16
	kg	40.4/47.7

OUTDOOR SPECIFICATION		
Compressor Type		TWIN-ROTARY
Compressor Model		EKPQ420D1UMUA
Refrigerant		R454B
Refrigerant Oil Charge(mL)		1460
Refrigerant Oil		VG75
Outdoor Air Flow (Max) (CFM)		4237.9
Outdoor Noise Level (dBA)		64.5
Dimension (W×D×H)	inch	37.48 x 16.34 x 52.48
	mm	952.0×415.0×1333.0
Package (W×D×H)	inch	43.11 x 19.49 x 57.48
	mm	1095×495×1460
Net/Gross Weight	lbs	208.78/239.86
	kg	94.7/108.8

ELECTRICAL	
Power Supply	208/230V,60Hz,1Ph
System MCA	44.00
Connection Wiring	14#x3
System MOCP	45
Compressor RLA	27.0
Outdoor Fan Motor RLA	1.2
Outdoor Fan Motor W	85
Indoor Fan Motor RLA	1.0
Indoor Fan Motor W	90
System Power Input @ Cooling (W)	5106(730 ~ 5760)
System Power Input @ Heating (W)	5330(1145 ~5900)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)


PIPING	
Throttle type(Indoor)	N/A
Throttle type(Outdoor)	EXV+Throttle valve
Liquid Size	9.52mm(3/8in)
Gas Size	19mm(3/4in)
Max. Piping Length(ft/m)	246.00(75)
Max. Height Difference(ft/m)	98.40(30)
Max. Pre-charged Length(ft/m)	24.6(7.5)
Refrigerant Pre-charged Amount(oz/kg)	126.99(3.60)
Additional Charge of Refrigerant((oz/ft)/(g/m))	0.32(30)
Connection Method	Flared

Indoor Unit Dimension

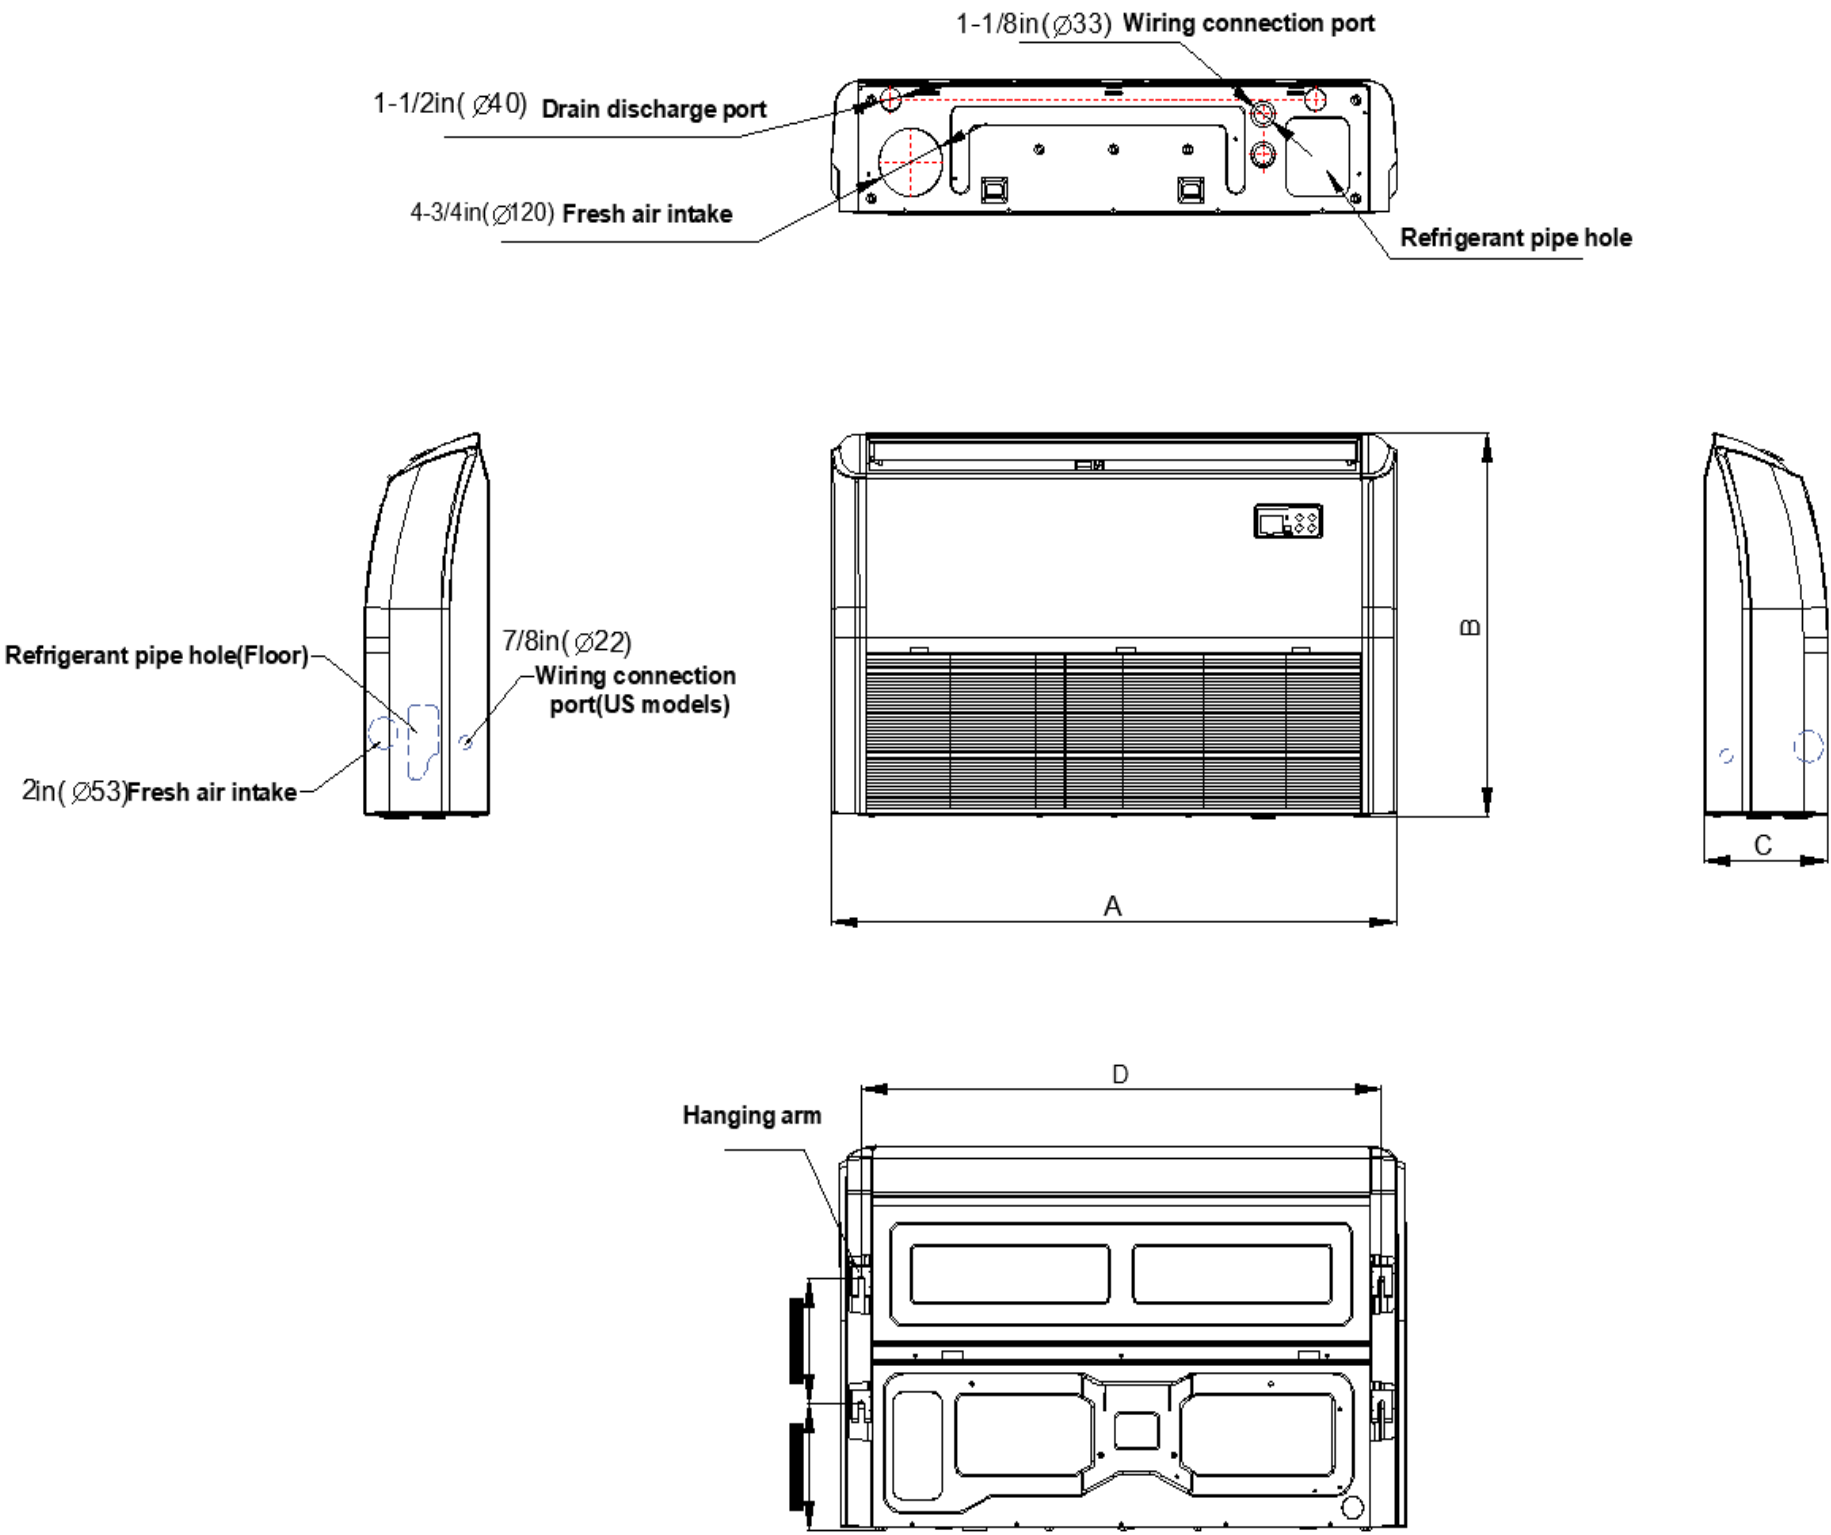


Model	A	B	C	D
18K/24K	42in(1068mm)	26-1/2in(675mm)	9-1/4in(235mm)	38-3/4in(983mm)
36K/48K/60K	65in(1650mm)	26-1/2in(675mm)	9-1/4in(235mm)	61-5/8in(1565mm)

Installation Instruction

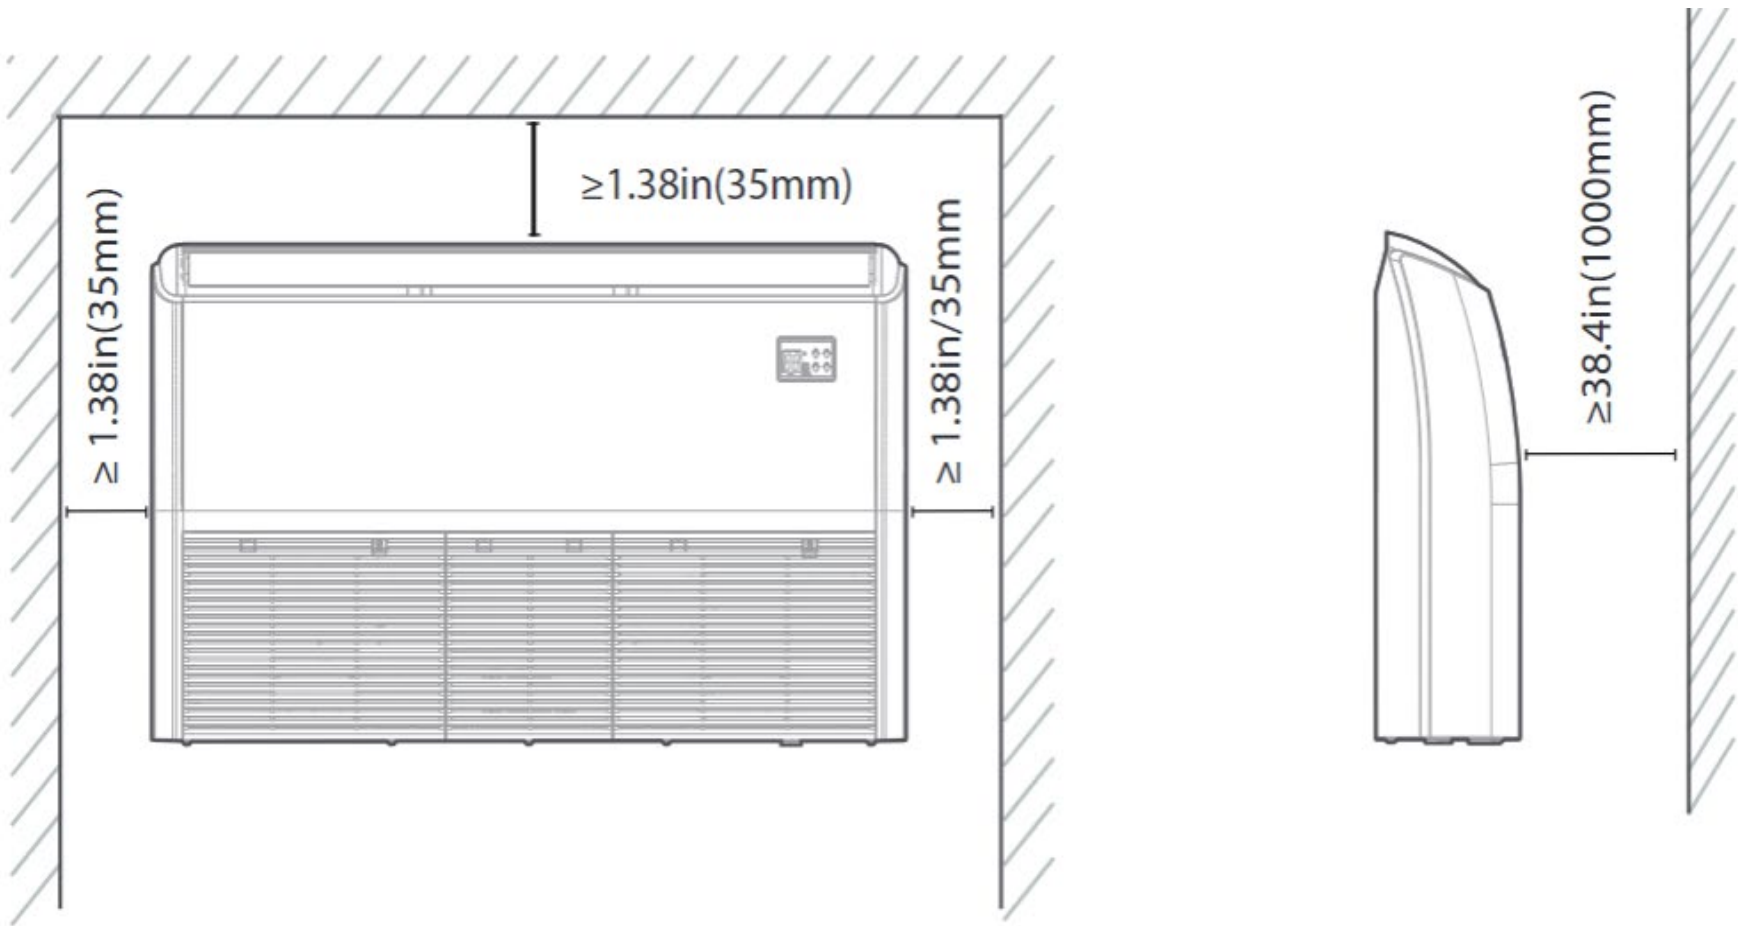


Outdoor Unit Dimension

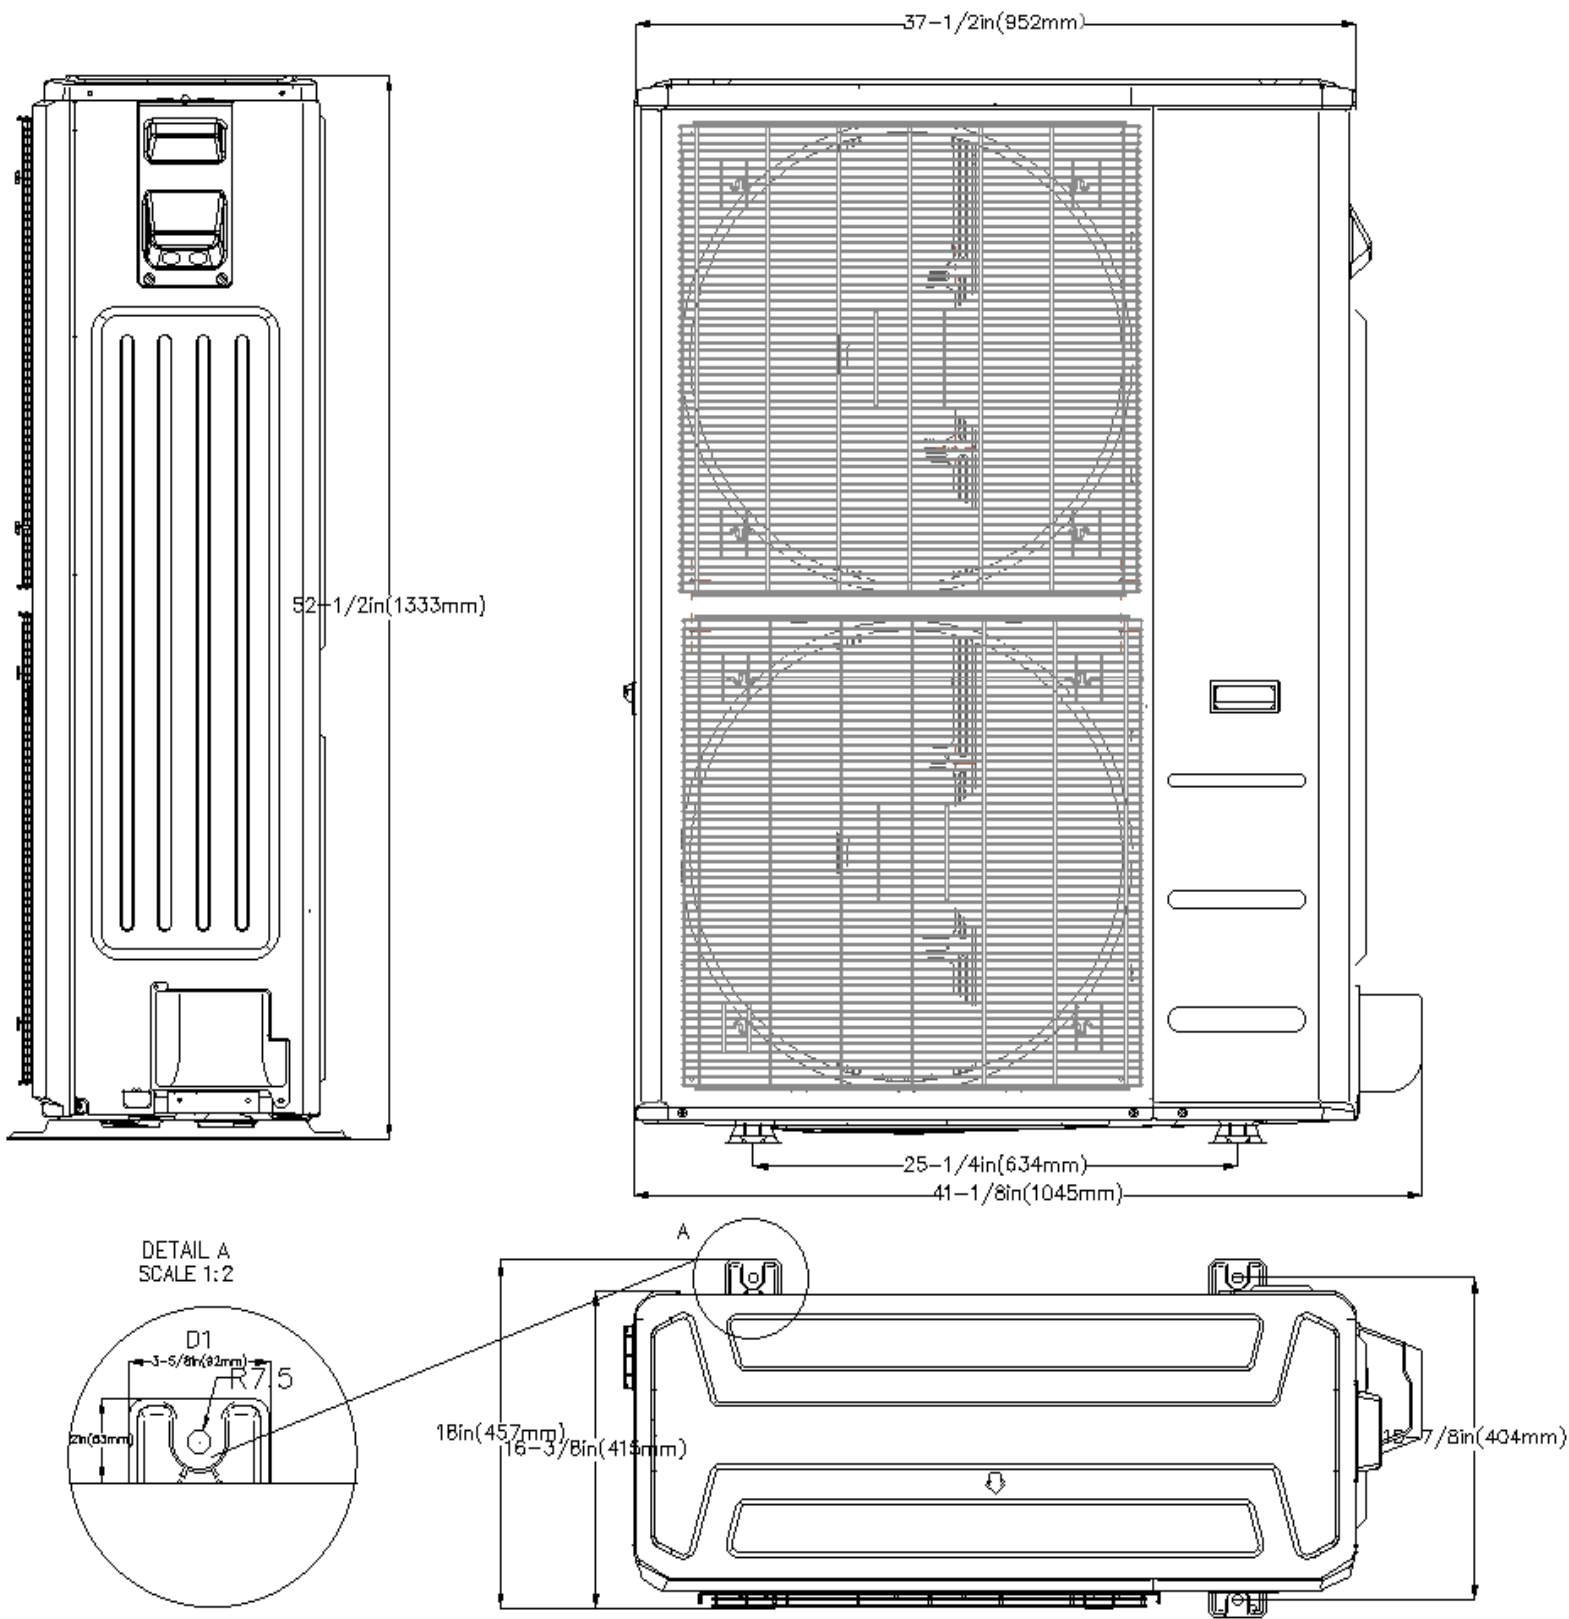

Installation Instruction

REQUIRED CLEARANCE

*1 20in. (500mm) or more when front and sides of the unit are clear

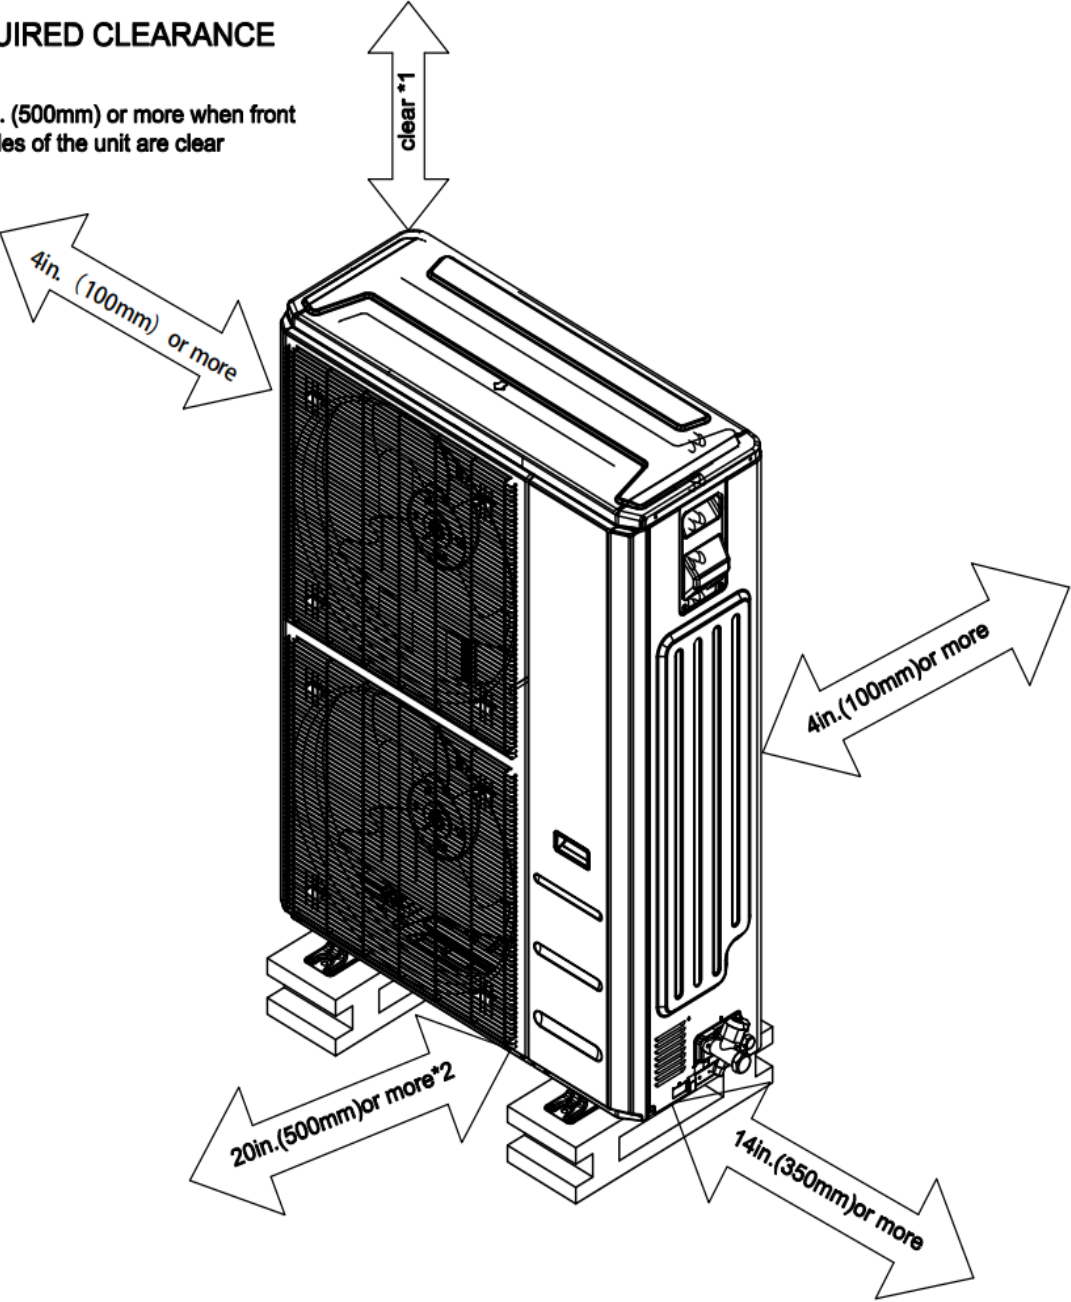

*2 When any 2 sides of left, right and rear of the unit are clear

SUBMITTAL DATA SHEET



Series Name: M4+ Floor & Ceiling System
Model Number: MOS60H2BH0A/MFC60H2BHRA

M4+ Floor & Ceiling System	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



EFFICIENCY			
Cooling		Heating	
SEER2	18	HSPF2-4	10.7
EER2	9.0	COP	1.91

PERFORMANCE of Cooling	
Cooling (Btu/hr)	
Rated Capacity	54000
Min/Max Capacity	20000~54500
Moisture Removal(L/h)	7.16
Standard Operating Range(°F/°C)	-22~122(-30~50)
Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating	
Heating (Btu/hr)	
1. @ 47°F Rated	60000
1. @ 47°F Min/Max Capacity	21700~65500
2. @ 17°F Rated	41000
3. @ 5°F Rated: Capacity / COP	54000/1.91
3. @ 5°F Max: Capacity	54000
Standard Operating Range(°F/°C)	-22~75(-30~24)
1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB


INDOOR SPECIFICATION		
Air Flow (Turbo/H/M/L/Si) (CFM)		1365.6/1236/1118.3/ 883/777
Noise Level (Turbo/H/M/L/Si) (dBA)		54.5/54.5/49/42/39
Dimension (W×D×H)	inch	64.96 x 26.57 x 9.25
	mm	1650.0×675.0×235.0
Package (W×D×H)	inch	67.91 x 29.72 x 12.52
	mm	1725×755×318
Net/Gross Weight	lbs	95.24/111.33
	kg	43.2/50.5

OUTDOOR SPECIFICATION		
Compressor Type		TWIN-ROTARY
Compressor Model		EKPQ440D1UMUB
Refrigerant		R454B
Refrigerant Oil Charge(mL)		1300
Refrigerant Oil		VG75
Outdoor Air Flow (Max) (CFM)		4237.9
Outdoor Noise Level (dBA)		64.5
Dimension (W×D×H)	inch	37.48 x 16.34 x 52.48
	mm	952.0×415.0×1333.0
Package (W×D×H)	inch	43.11 x 19.49 x 58.27
	mm	1095×495×1480
Net/Gross Weight	lbs	230.38/261.69
	kg	104.5/118.7

ELECTRICAL	
Power Supply	208/230V,60Hz,1Ph
System MCA	44.00
Connection Wiring	14#x3
System MOCP	45
Compressor RLA	26.8
Outdoor Fan Motor RLA	2.2
Outdoor Fan Motor W	85
Indoor Fan Motor RLA	2.0
Indoor Fan Motor W	160
System Power Input @ Cooling (W)	6000(2000 ~ 5900)
System Power Input @ Heating (W)	5823(1240 ~6000)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)


PIPING	
Throttle type(Indoor)	N/A
Throttle type(Outdoor)	EXV+Throttle valve
Liquid Size	9.52mm(3/8in)
Gas Size	19mm(3/4in)
Max. Piping Length(ft/m)	246.00(75)
Max. Height Difference(ft/m)	98.40(30)
Max. Pre-charged Length(ft/m)	24.6(7.5)
Refrigerant Pre-charged Amount(oz/kg)	151.68(4.30)
Additional Charge of Refrigerant((oz/ft)/(g/m))	0.32(30)
Connection Method	Flared

Indoor Unit Dimension

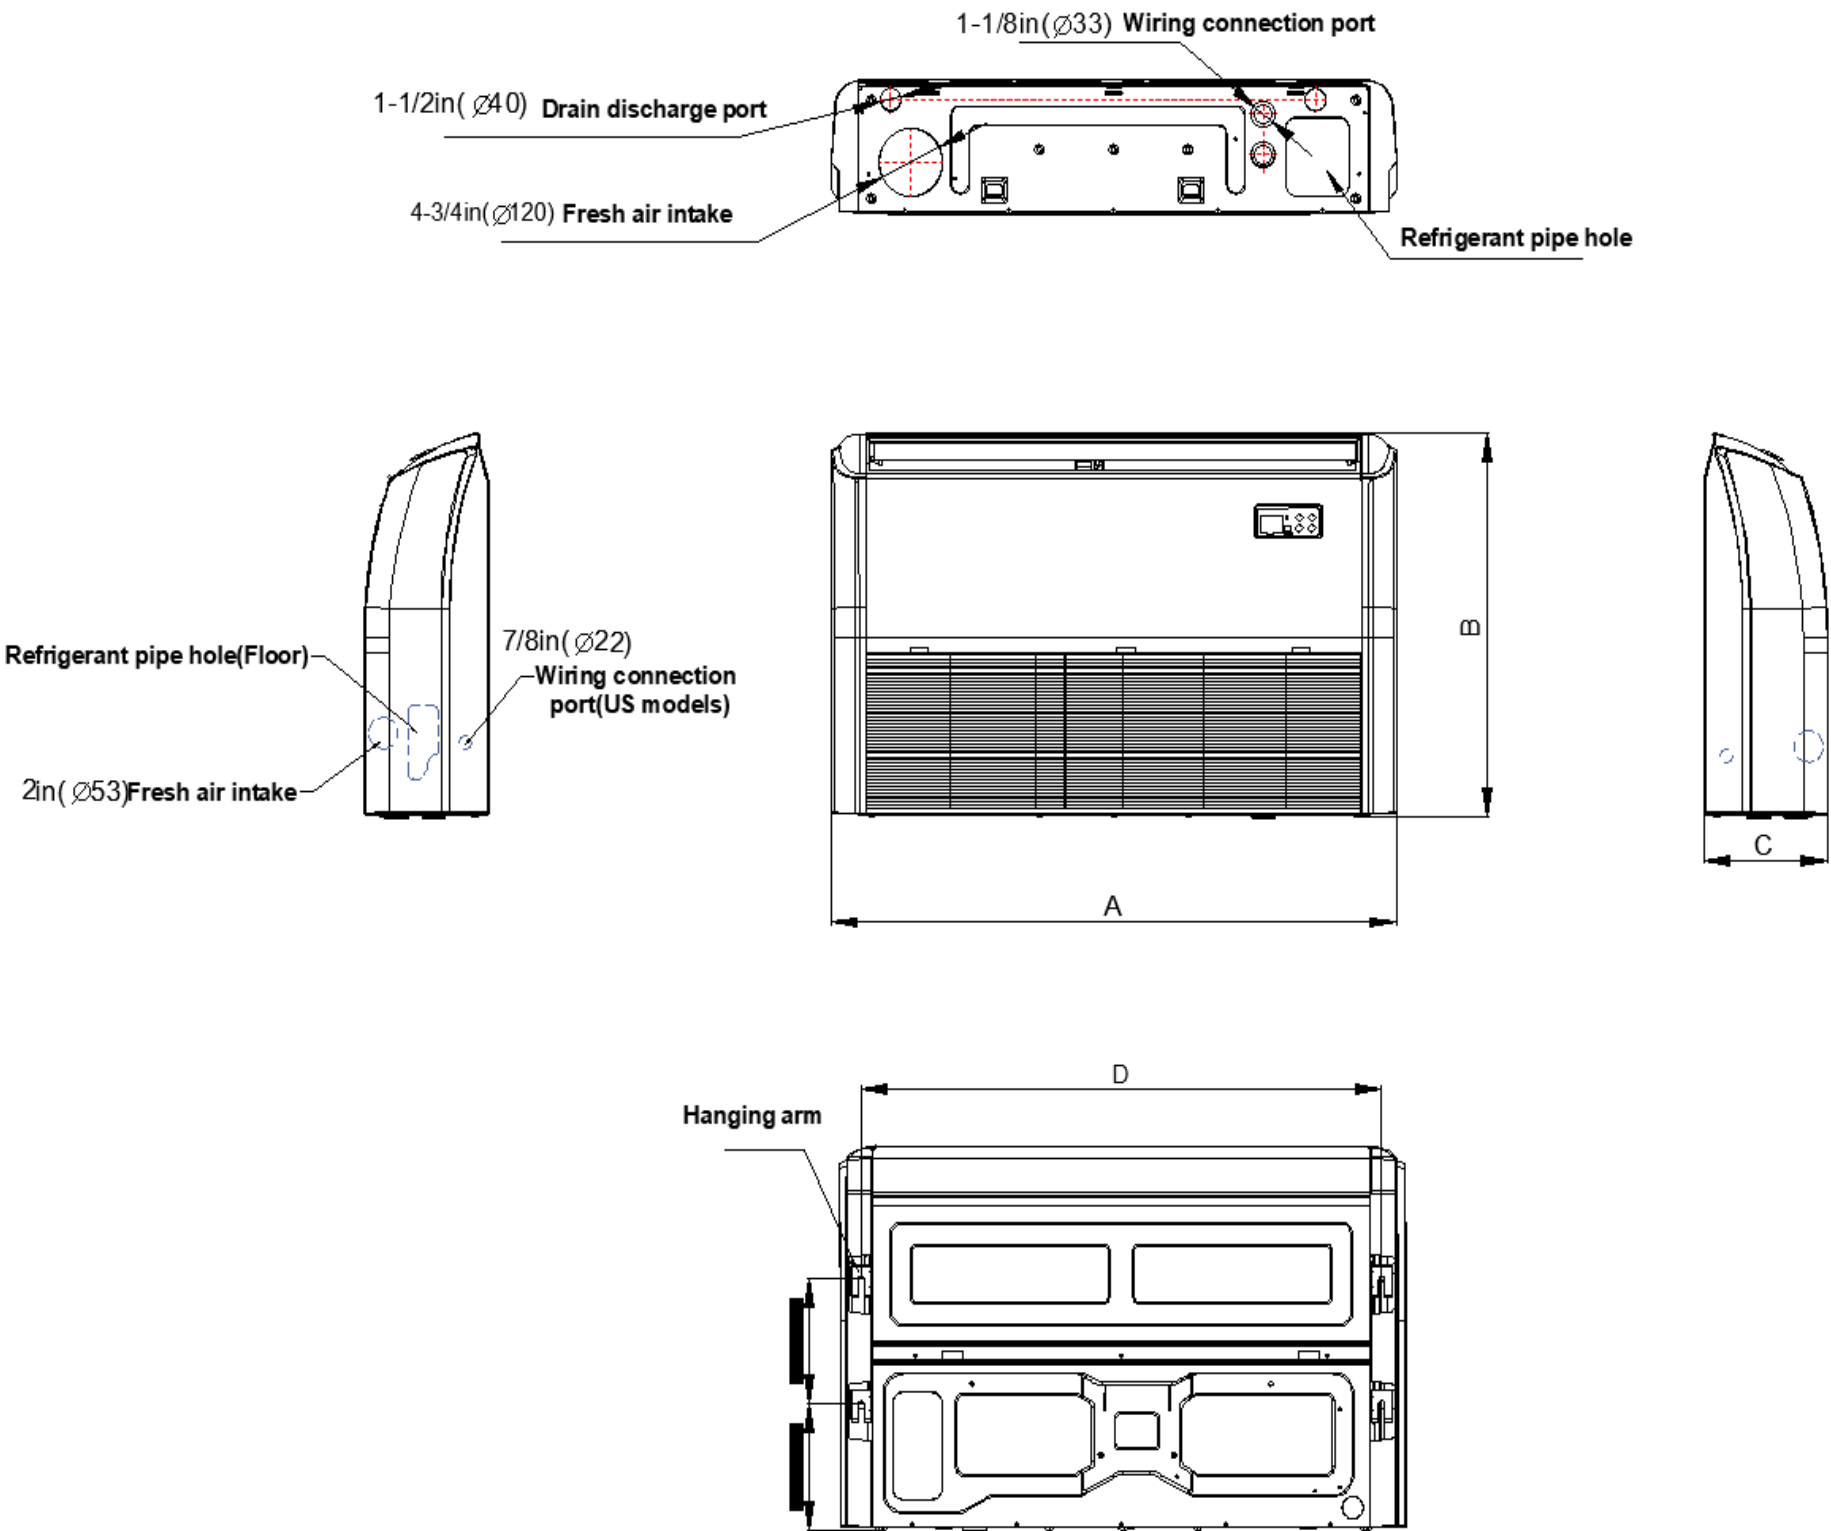


Model	A	B	C	D
18K/24K	42in(1068mm)	26-1/2in(675mm)	9-1/4in(235mm)	38-3/4in(983mm)
36K/48K/60K	65in(1650mm)	26-1/2in(675mm)	9-1/4in(235mm)	61-5/8in(1565mm)

Installation Instruction

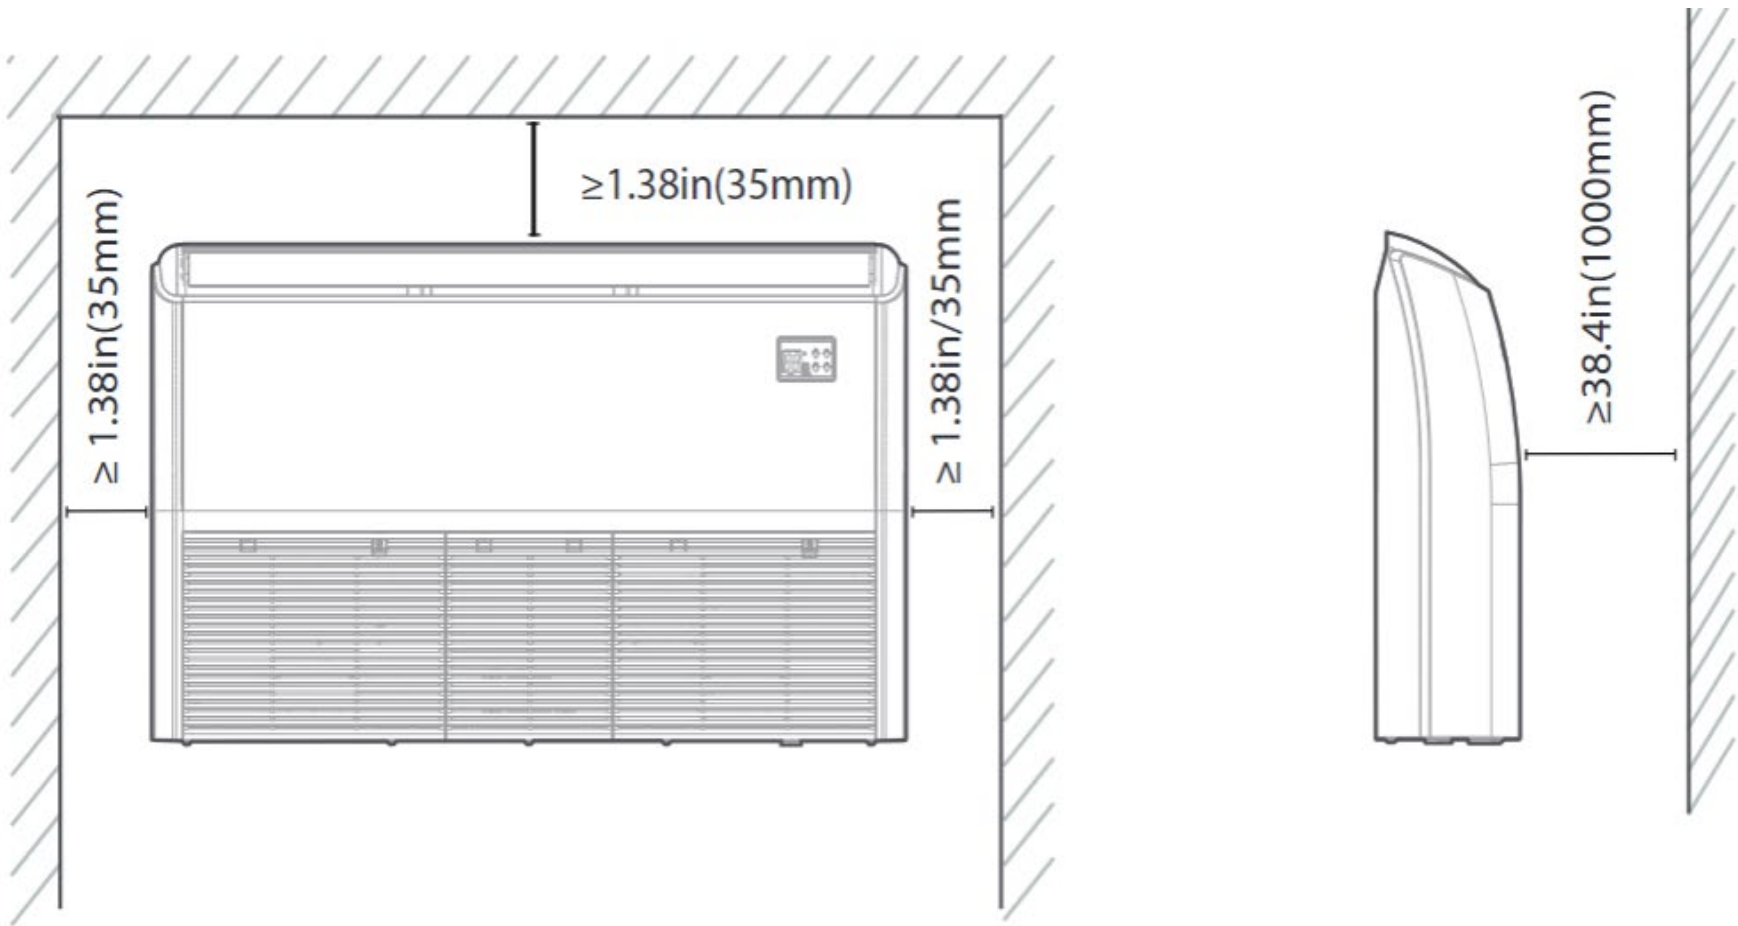


Outdoor Unit Dimension

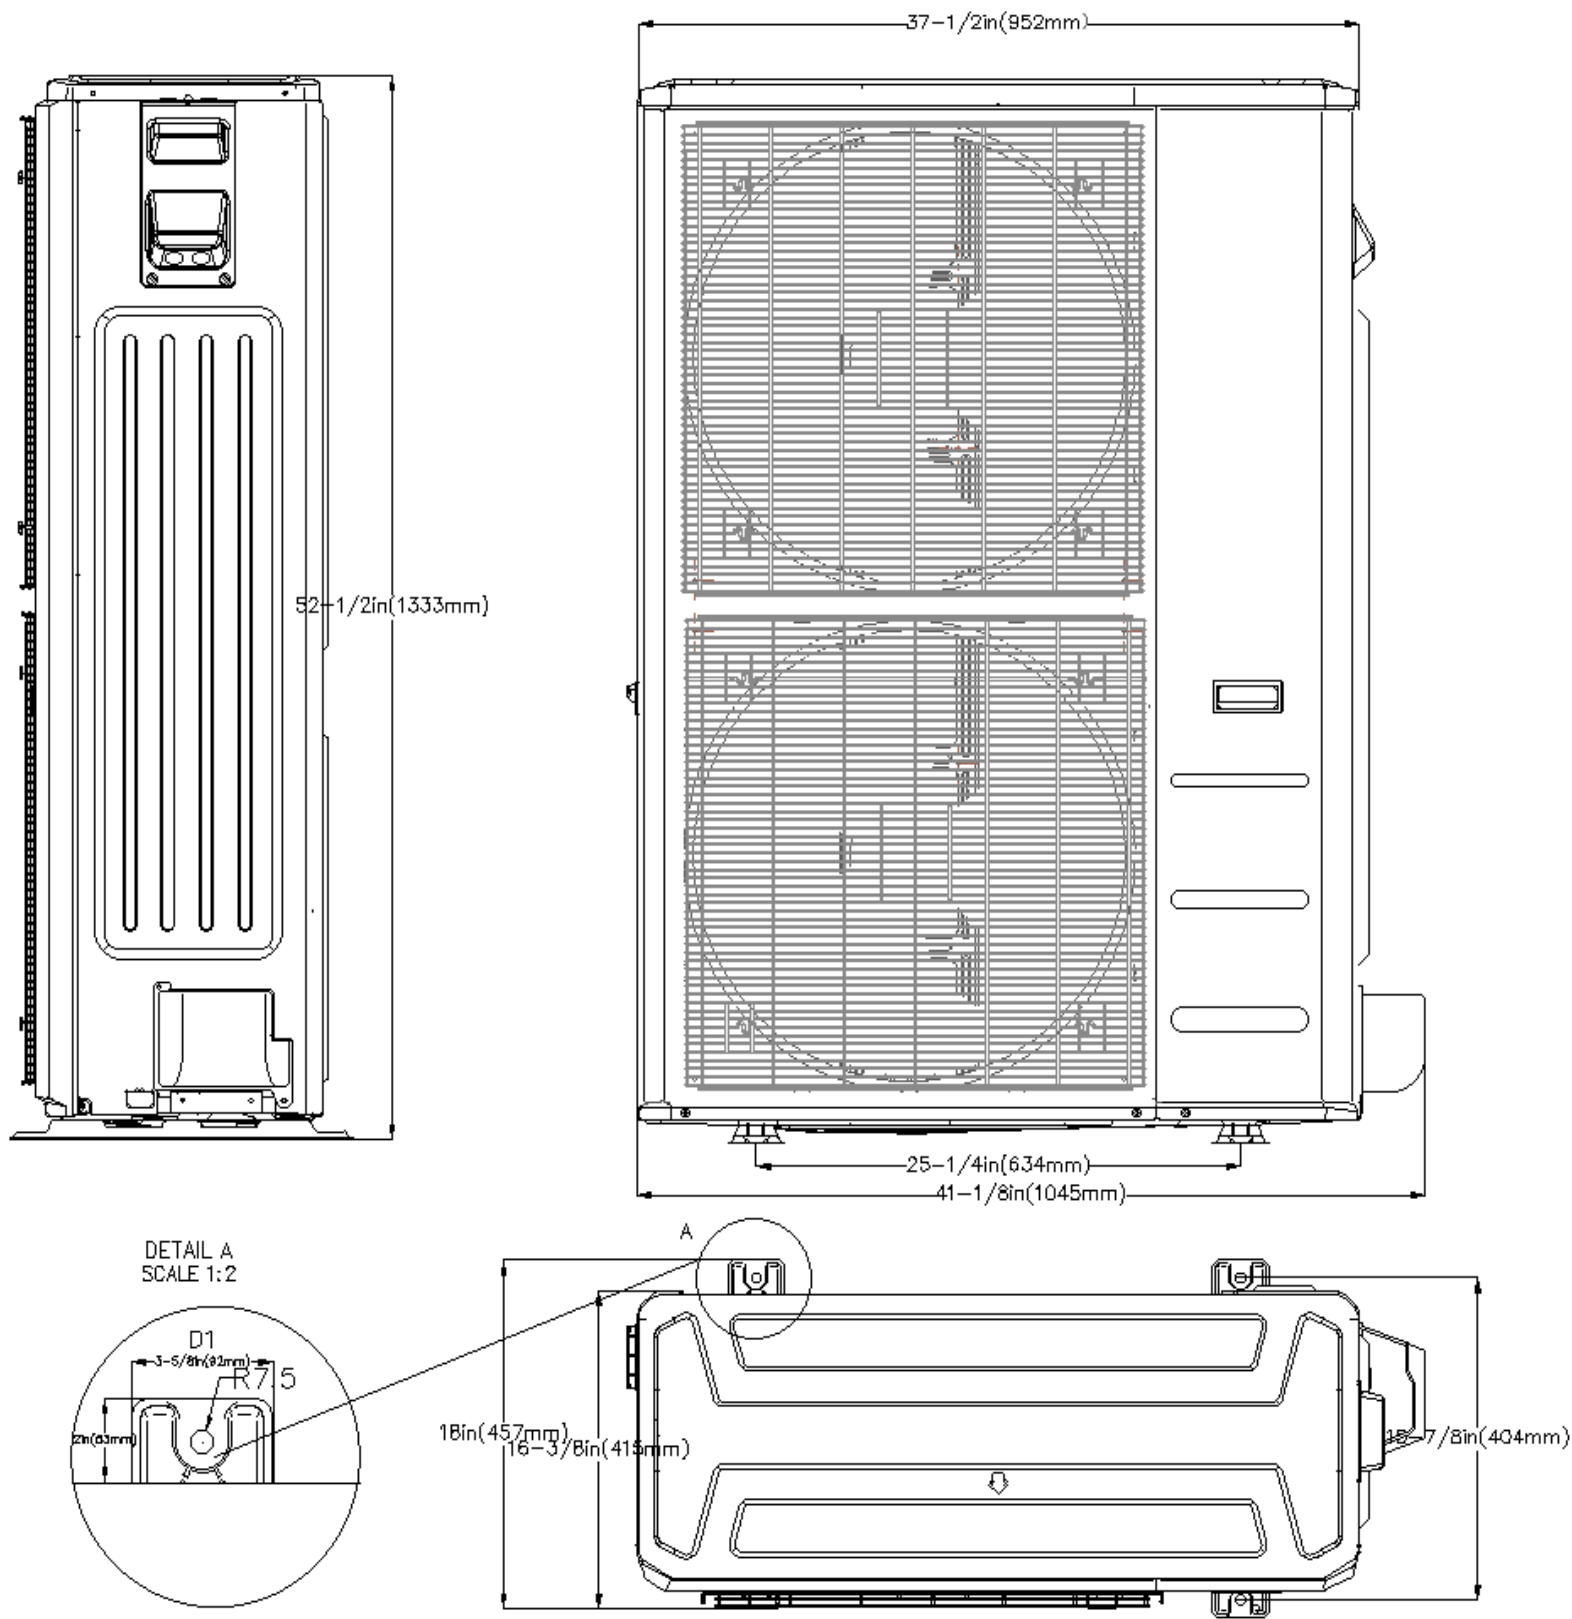

REQUIRED CLEARANCE

*1 20in. (500mm) or more when front and sides of the unit are clear

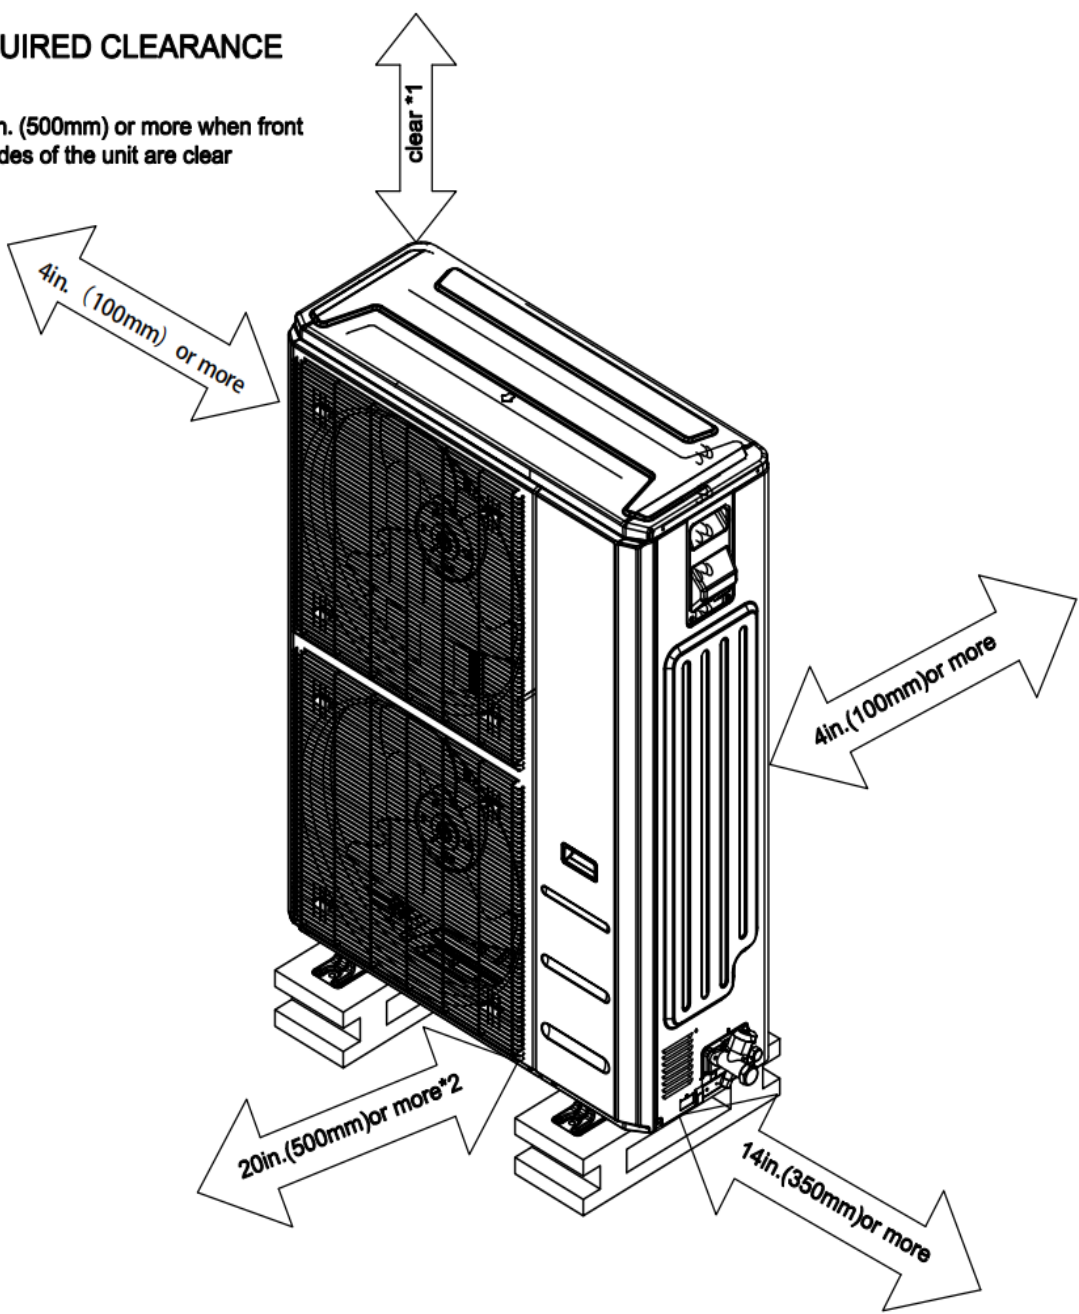

*2 When any 2 sides of left, right and rear of the unit are clear