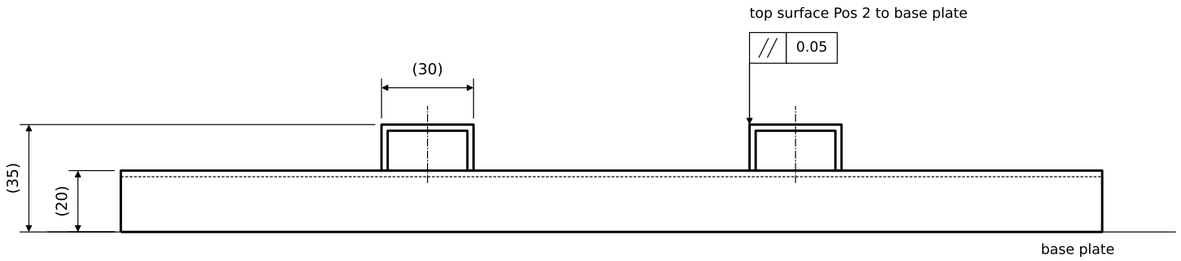

FRONT VIEW

4× contact Pos 2 on Pos 1: gap ≤ 0.05

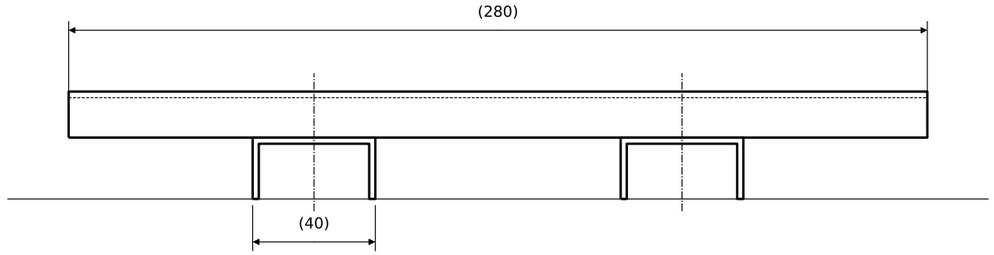

SIDE VIEW (from left)

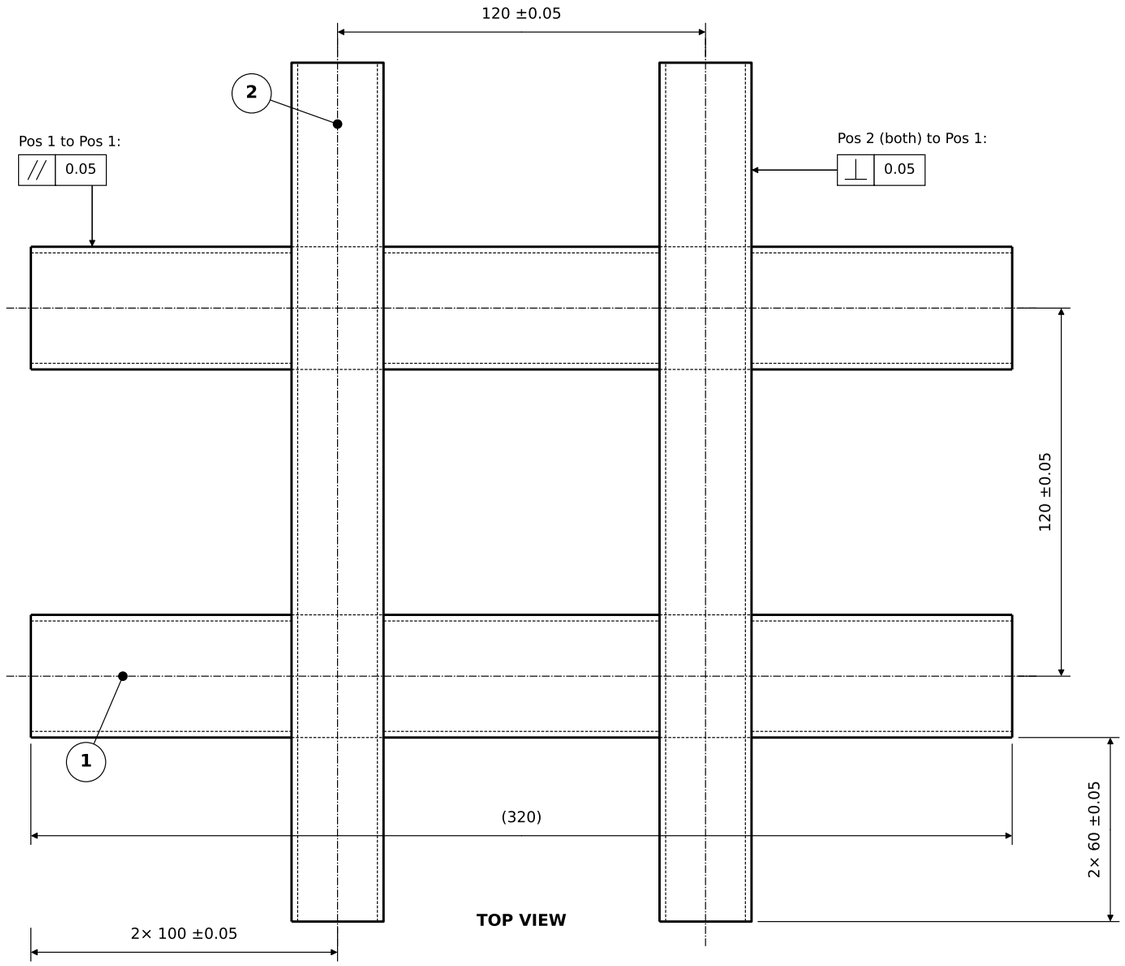

TOP VIEW

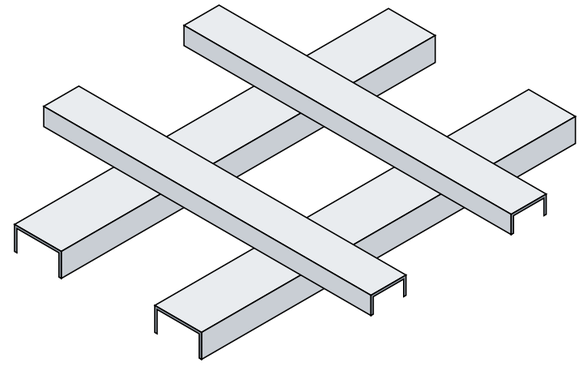

ISOMETRIC VIEW (not to scale)

Pos	Qty	Designation	Material	Mass/pc
1	2	U-profile 40×20×2 – L 320 (lower level)	S235JR, EN 10162	0.38 kg
2	2	U-profile 30×15×2 – L 280 (upper level)	S235JR, EN 10162	0.25 kg

ETH Zurich · Advanced Manufacturing Lab (am|z)

Hash assembly – 4× U-profile, 2 levels

Drawn J. Petrik 02.11.2026	Checked —	Scale 1:2	Format / Sheet A3 1 / 2
General tolerances (parts) ISO 2768-m	Geometrical tol. (ISO 1101) see FCF	Units mm	Revision A
Surface ISO 1302 Ra 3.2	Edges ISO 13715 -0.3	Mass (approx.) 1.26 kg	Drawing no. AMZ-SA-26-001
Projection	Status Recruitment assignment – not for production		

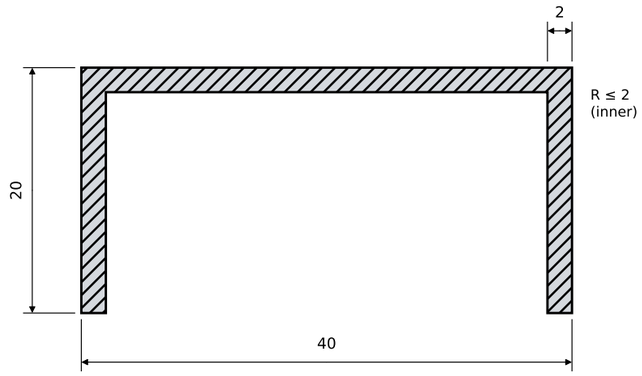

SECTION Pos 1 (2:1)

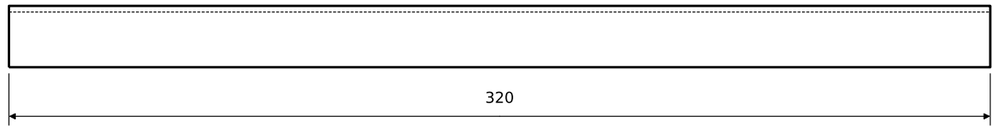

Pos 1 – U 40×20×2, L 320, S235JR, cold-formed EN 10162 (1:2)

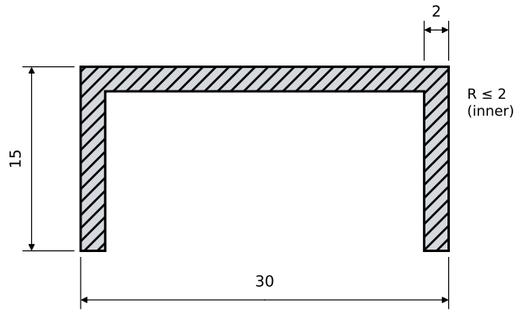

SECTION Pos 2 (2:1)



Pos 2 – U 30×15×2, L 280, S235JR, cold-formed EN 10162 (1:2)

Pos	Qty	Designation	Material	Mass/pc
1	2	U-profile 40×20×2 – L 320 (lower level)	S235JR, EN 10162	0.38 kg
2	2	U-profile 30×15×2 – L 280 (upper level)	S235JR, EN 10162	0.25 kg

ETH Zurich · Advanced Manufacturing Lab (am|z)

Parts Pos 1 and Pos 2

Drawn J. Petrik 02.11.2026	Checked —	Scale 1:2 / 2:1	Format / Sheet A3 2 / 2
General tolerances (parts) ISO 2768-m	Geometrical tol. (ISO 1101) see FCF	Units mm	Revision A
Surface ISO 1302 Ra 3.2	Edges ISO 13715 -0.3	Mass (approx.) 1.26 kg	Drawing no. AMZ-SA-26-001
Projection	Status Recruitment assignment – not for production		