



US006803682B1

(12) **United States Patent**
Thirunarayan et al.

(10) **Patent No.:** **US 6,803,682 B1**
(45) **Date of Patent:** **Oct. 12, 2004**

(54) **HIGH PERFORMANCE LINEAR MOTOR
AND MAGNET ASSEMBLY THEREFOR**

6,380,661 B1 * 4/2002 Henderson 310/323.02
6,455,957 B1 * 9/2002 Chitayat 310/12

(75) Inventors: **Nandakumar Thirunarayan**, St.
James, NY (US); **James F. Smith**,
Smithtown, NY (US)

FOREIGN PATENT DOCUMENTS

JP 2001145328 A * 5/2001 H02K/41/03
JP 2001197717 A * 7/2001 H03K/41/03

(73) Assignee: **Anorad Corporation**, Shirley, NY (US)

OTHER PUBLICATIONS

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 14 days.

design of bruss less permanet magnet motors L.R. Heinder-
shot Jr. and T Miller Clrendon press Oxford Jan. 1994.*

* cited by examiner

(21) Appl. No.: **10/369,161**

Primary Examiner—Darren Schuberg

Assistant Examiner—Iraj a. Mohandesi

(22) Filed: **Feb. 19, 2003**

(74) *Attorney, Agent, or Firm*—Amin & Turocy LLP; John
M. Miller

Related U.S. Application Data

(60) Provisional application No. 60/358,654, filed on Feb. 21,
2002.

(51) **Int. Cl.**⁷ **H02K 41/00**

(52) **U.S. Cl.** **310/12; 310/15**

(58) **Field of Search** 310/12, 15, 13;
H02K 41/03

(57) **ABSTRACT**


A magnet assembly includes a back iron and an array of
magnets. The back iron is in the form of a plate having
opposed surfaces. The magnets are arranged along one of the
surfaces, with the other surface being dimensioned and
configured according to the magnetic field distribution asso-
ciated with the magnets. The back iron geometry provides
for reduced mass, reduced leakage flux, and high flux
densities to improve performance of a linear motor that
employs such a magnet assembly.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,016,021 A * 1/2000 Hinds 310/12
6,097,114 A * 8/2000 Hazelton 310/12

19 Claims, 4 Drawing Sheets

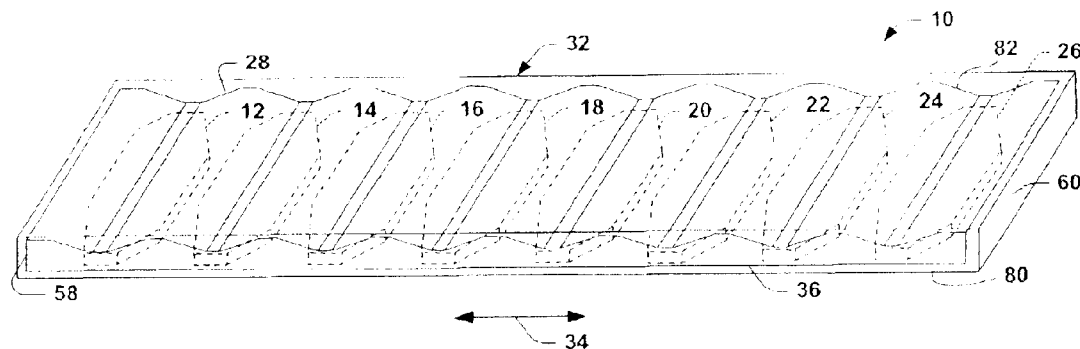

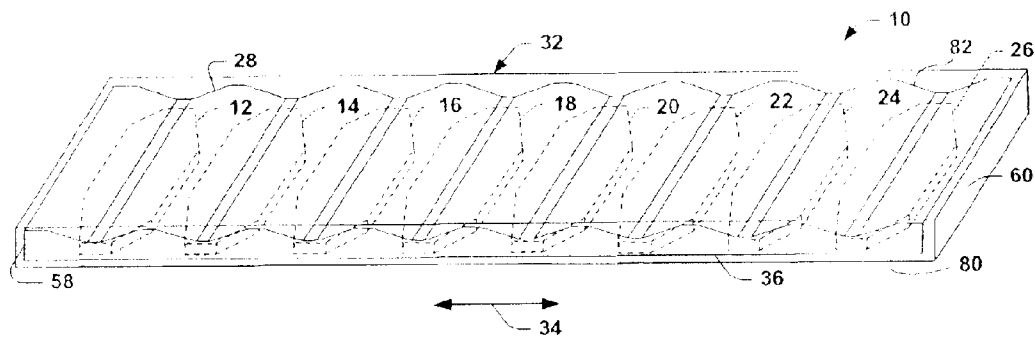


FIG. 1

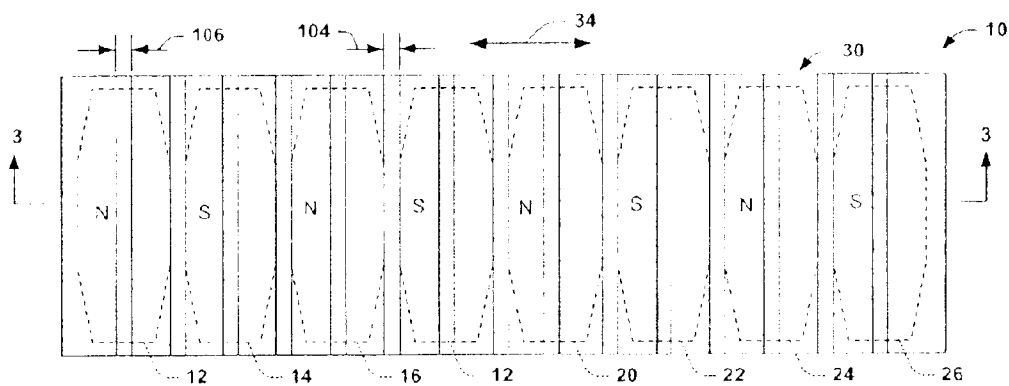


FIG. 2

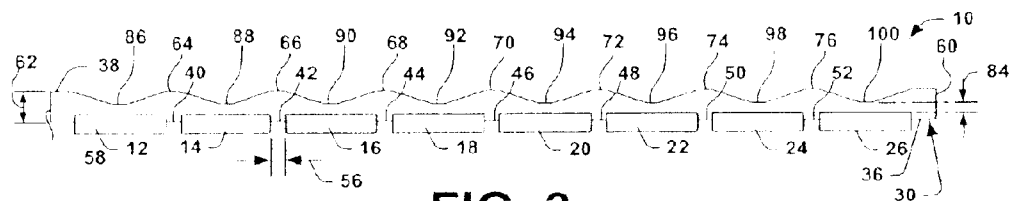


FIG. 3

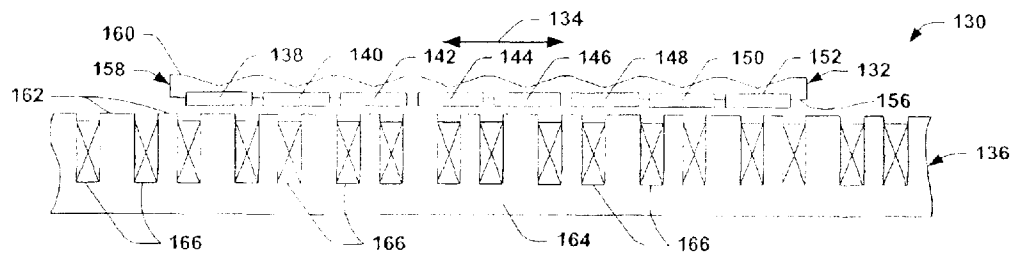


FIG. 4

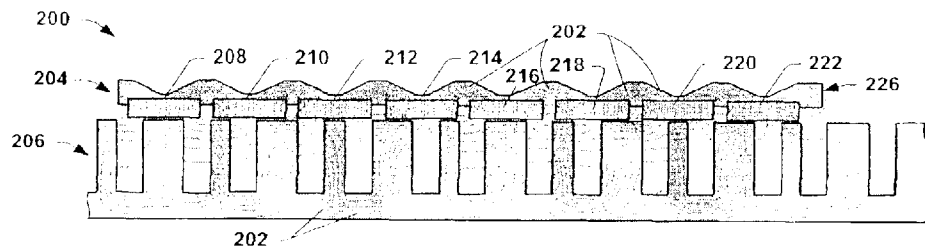


FIG. 5

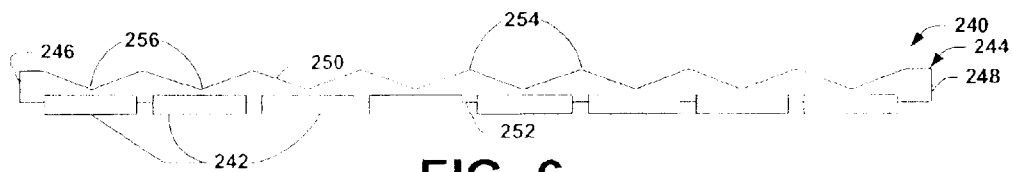


FIG. 6

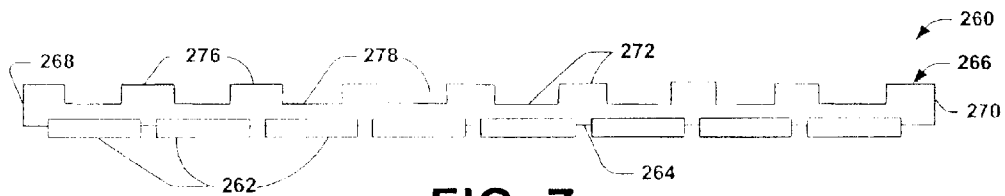


FIG. 7

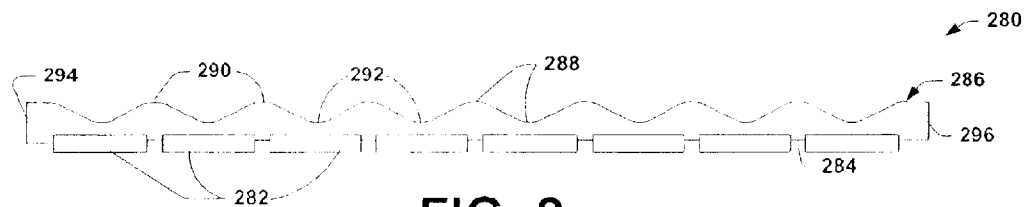


FIG. 8

1

HIGH PERFORMANCE LINEAR MOTOR AND MAGNET ASSEMBLY THEREFOR

REFERENCE TO RELATED APPLICATION

This application claims the benefit of U.S. Provisional Patent Application Ser. No. 60/358,654, which was filed Feb. 21, 2002, entitled HIGH PERFORMANCE LINEAR MOTOR MAGNET ASSEMBLY THEREFOR, which is incorporated by reference herein.

TECHNICAL FIELD

The present invention relates to motors and, more particularly, to a magnet assembly and to a linear motor incorporating the magnet assembly.

BACKGROUND OF THE INVENTION

Linear motors are used in various types of systems, such as for positioning and moving applications, including machining and gantry type systems. The high performance systems often require moving elements subjected to high acceleration levels. In order to achieve such high acceleration, the linear motor must exert large forces upon the elements to be moved.

There are various configurations of linear motors, including flat motors, U-channel motors and tubular shaped motors. Different types of linear motors are also available, including brush, AC brushless, stepper, and induction motors. Common to most linear motors is a moving assembly, usually called a forcer or stage, which moves relative to a stationary platen (or path) according to magnetic fields generated by application of current through one or more associated windings. The windings can be on the forcer or at the platen depending on the type of motor. For example, in a permanent magnet linear motor, a series of armature windings can be mounted within a forcer that is movable relative to a stationary path. The path can include an array of permanent magnets configured to interact with the coils in the stage when energized with an excitation current.

Alternatively, in another type of conventional linear motor, permanent magnets can be part of a moveable stage with the coils situated in the platen. Usually, the permanent magnets are attached to a back iron plate above the coils, which are oriented along a path of travel. The magnets usually are rectangular in shape. The magnets are arranged along the back iron so that adjacent pairs of magnets have opposite magnetic pole orientations. The magnets can be oriented generally normal to the direction of travel or inclined at a slight angle from normal to an axis of the direction of travel for the linear motor. The inclined angle creates a flux distribution along the axis of movement which is generally sinusoidal in nature. Such a resulting distribution due to the optimized motor geometry tends to reduce cogging during operation of the linear motor, which would otherwise occur if the magnets were aligned, normal to the axis of movement.

Although an inclined angle of the magnets can reduce some cogging, it presents a disadvantage in that a larger area typically must be covered by the rectangular magnets in order to sufficiently cover and interact with the coils of the armature. When the magnets are implemented with a larger area so as to reduce cogging effects, a larger footprint for the back iron also is required. This tends to increase the overall weight and size of the stage. Such increases in size and weight can present additional obstacles, such as in applications where there are size constraints and low mass is desir-

2

able. For example, as the mass of the stage increases, the available acceleration experiences a corresponding reduction, and the ability to stop the motor accurately also reduces because of the increased power dissipation needed to stop the motor.

As the use of linear motors in manufacturing equipment continues to increase, nominal increases in the speed of operation translate into significant savings in the cost of production. Accordingly, it is desirable to provide a magnet assembly that can be part of a high performance linear motor.

SUMMARY

The following presents a simplified summary of the invention in order to provide a basic understanding of some aspects of the invention. This summary is not an extensive overview of the invention. It is intended to neither identify key or critical elements of the invention nor delineate the scope of the invention. Its sole purpose is to present some concepts of the invention in a simplified form as a prelude to the more detailed description that is presented later.

One aspect of the present invention provides a magnet assembly that can be employed as part of a linear motor stage to form a high performance linear motor. The magnet assembly includes a plurality of magnets operatively associated with magnetically conductive plate, commonly known as a back iron. The magnets extend from a common side of the back iron. The back iron is dimensioned and configured to substantially conform to magnetic flux that travels through the back iron when the magnet assembly is exposed to a magnetic field, such as from windings of a motor path. In one particular aspect of the present invention, a cross-sectional dimension of the back iron varies between opposed ends of the back iron as a function of the position and/or orientation of the magnets. For example, a thickness of the back iron is greater at locations between adjacent pairs of the magnets than at locations generally centered with the respective magnets. As a result of such back iron geometry, force output to moving mass ratio of a motor incorporating the magnet assembly is improved over conventional configurations of magnet assemblies. Also, the back iron geometry reduces leakage flux.

Another aspect of the present invention provides a linear motor system that includes a path having a plurality of windings, which can be energized to produce desired magnetic fields. The linear motor system also includes a magnet assembly, such as described above. The linear motor system achieves high performance because the magnet assembly has a reduced mass, which substantially conforms to magnet flux lines that travel through the magnet assembly during energization of path windings. The mass further can be reduced by employing generally elongated octagonal magnets, such as by removing corner portions from rectangular magnets.

To the accomplishment of the foregoing and related ends, certain illustrative aspects of the invention are described herein in connection with the following description and the annexed drawings. These aspects are indicative, however, of but a few of the various ways in which the principles of the invention may be employed and the present invention is intended to include all such aspects and their equivalents. Other advantages and novel features of the invention will become apparent from the following detailed description of the invention when considered in conjunction with the drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an isometric view of a moving magnet assembly in accordance with an aspect of the present invention.

3

FIG. 2 is a top elevation of the magnet assembly of FIG. 1.

FIG. 3 is a side sectional view of the magnet assembly taken along line 3-3 of FIG. 2.

FIG. 4 is side sectional view of part of a linear motor in accordance with an aspect of the present invention.

FIG. 5 is a side sectional view similar to FIG. 4, illustrating magnetic flux lines for an energized linear motor in accordance with an aspect of the present invention.

FIG. 6 is a side sectional view of a motor magnet assembly in accordance with another aspect of the present invention.

FIG. 7 is a side sectional view of a motor magnet assembly in accordance with another aspect of the present invention.

FIG. 8 is a side sectional view of a motor magnet assembly in accordance with another aspect of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

The present invention provides a magnet assembly for use in a linear motor. The magnet assembly includes a back iron and an array of magnets. The back iron is in the form of a plate having opposed surfaces of the back iron. The magnets are arranged in a generally linear array along one of the surfaces. The other surface of the back iron plate is dimensioned and configured according to the magnetic field distribution and/or localized regions of saturation associated with the motor geometry/topology. For example, the surface of the back iron plate opposite to which the magnets are attached can be scalloped, such that a dimension between the opposed surfaces at locations generally aligned with the magnet centers is less than a dimension between the opposed surfaces at locations between adjacent magnets.

FIGS. 1, 2 and 3 illustrate a magnet assembly 10 in accordance with an aspect of the present invention. The magnet assembly 10 includes an array of permanent magnets 12, 14, 16, 18, 20, 22, 24, and 26 of alternating magnetic polarity (see FIG. 2). The magnets 12-26 are arranged in a substantially parallel relationship to each other and mounted to a generally rigid and magnetically conductive plate 30, commonly referred to (and hereinafter referred to) as a back iron. The alternating polarity facilitates the flow of magnetic flux through the magnets 12-26 and the back iron 30. The assembly 10 also includes an outer encapsulation 32 of a suitable non-conducting material, such as an epoxy or a polymer material. The encapsulation 32 helps hold the magnets 12-26 and back iron 30 in a desired relationship.

FIG. 2 is a top elevation of the magnet assembly of FIG. 1 in which the encapsulation 32 has been removed. As shown in FIG. 2, the magnets 12-26 have a generally rectangular geometry and are spaced apart from each other by a predetermined distance. The magnets 12-26 have long axes, which are oriented generally perpendicular to a desired direction of travel for the assembly 10, indicated at 34, and which are aligned substantially parallel to each other. To provide desired flux distribution, the corners of each of the magnets 12-26 have been chamfered to form magnets having elongated octagonal geometries, such as shown in FIG. 2. The precise configuration can vary depending on the size of the magnets 12-26, the size of the motor in which the assembly is to be employed as well as the desired characteristics for the motor. In this example, the illustrated magnet geometry also helps reduce the mass of the magnet assembly

4

10. By way of example, the magnets are formed of a NdFeB material or other type of high performance permanent magnetic materials.

Referring to the side-sectional view of FIG. 3, the 12-26 magnets are mounted to and extend from a common side 36 of the back iron 30. The back iron 30 also includes another side 38 opposite the side 36 to which the magnets 12-26 are mounted. In particular, the magnets 12-26 are positioned in slots or receptacles on the side 36, which are dimensioned and configured to receive a portion of the respective magnets therein. Adjacent pairs of the slots define notches 40, 42, 44, 46, 48, 50, and 52 of the back iron material that extend between adjacent pairs of magnets. The notches 40-52 operate to separate adjacent pairs of the magnets 12-26 by a predetermined distance, indicated at 56, which corresponds to the width of the respective notches. For example, less than one-half the width of the magnets 12-26 are recessed into the back iron 30, such that more than one-half the width of the magnets extend outwardly from the side 36 of the back iron 30. The notches 40-52 and remaining surface of the side 36 are generally coplanar, although other shapes and configurations could be used in accordance with an aspect of the present invention. Also, the notches 40-52 act as retainers locking the magnets in place providing the desired stiffness.

In accordance with an aspect of the present invention, a cross-sectional dimension of the back iron 30 varies along its length between spaced apart ends 58 and 60 so as to substantially conform to the magnetic flux generated during operation of a motor that includes the magnet assembly 10. In the example of FIG. 3, the thickness of the back iron 30 between the opposed sides 36 and 38 is greater at locations between adjacent pairs of the magnets 12-26 than at locations generally aligned with centers of the respective magnets. The back iron 30 can be formed of substantially any generally rigid material capable of conducting a magnetic field, so as to help form a magnetic circuit formed of the magnets 12-26 of different polarities and associated motor windings (not shown).

For example, the back iron 30 is formed of a non-linear material having a high magnetic permeability and desired saturation characteristics. In a particular aspect of the present invention, the back iron is formed of vanadium permeadur (e.g., cobalt-48.75%, Vanadium-2%, Carbon-0.004%, Manganese-0.05%, Silicon-0.05%, Iron-balance), which has particularly high saturation characteristics compared to other non-linear materials. While such material is considerably more expensive than steel, its superior magnetic properties are desirable in ultra-high performance motors according to the present invention. It is to be understood and appreciated that a high performance magnet assembly, in accordance with an aspect of the present invention, could employ other types of non-linear materials (e.g., M19 steel) than vanadium permeadur.

By way of illustration, the back iron 30 has a maximum thickness, indicated at 62, at its ends 40 and 42 and at locations 64, 66, 68, 70, 72, 74, and 76 between adjacent pairs of magnets 12-26. In the example of FIG. 3, the locations 64-76 having the maximum thickness 62 are substantially coextensive with the notches 40-52. Additionally, the side 38 of the back iron 30 at the ends 58 and 60 and at the locations 64-76 are generally coplanar and substantially parallel to the other side 36 of the back iron. It is to be appreciated, however, that back iron other shapes (e.g., curved in the direction of travel) also could be utilized in accordance with an aspect of the present invention. Thus, as shown in FIGS. 1 and 2, the side 38 defines generally

5

rectangular and coplanar strips extend between side edges **80** and **82** of the back iron **30** at the ends **58** and **60** and at the locations **64–76**.

The back iron **30** further has a minimum thickness, indicated at **84**, at locations **86, 88, 90, 92, 94, 96, 98,** and **100** substantially centered with the long axes of the respective magnets **12–26**. In the example of FIG. 3, the locations **86–100** have the minimum thickness **84**, which define generally rectangular planes or strips in the side surface **38** spaced from and substantially parallel to the magnets **12–26** over which the respective locations are positioned. The locations generally rectangular strips, which can be coplanar, extend between the side edges **80** and **82** of the back iron **30**.

The portions of the side **38** extending between the locations of maximum thickness (e.g., the ends **58** and **60** and the locations **64–76**) and the locations of minimum thickness **86–100** slope upwardly and downwardly to provide a desired scalloped or sawtooth cross section, as illustrated in FIG. 3. That is, the locations (or strips) **64–76** and **86–100** respectively provide alternating peaks and valleys along the surface **38** of the back iron.

Referring to FIG. 2, each of the locations **64–76** of maximum back iron thickness has a width **104** in the direction **34**, which width is greater than or equal to zero. Similarly, each of the locations **86–100** of minimum back iron thickness has a width **106** in the direction **34**, which width is greater than or equal to zero. Accordingly, while the locations of maximum and minimum thickness are illustrated as generally planar and parallel to the side **36**, those skilled in the art will understand and appreciated that virtually any widths **104** and **106** can be employed to provide different varying cross-sectional configurations for the back iron in accordance with an aspect of the present invention. Additionally or alternatively, while the locations **64–76**, the locations **86–100** and the portion of the side surface extending therebetween are illustrated as generally planar surfaces, it is to be appreciated that one or more of such surface portions could be curved in accordance with an aspect of the present invention.

FIG. 4 illustrates a cross-sectional view of a linear motor system **130** in accordance with an aspect of the present invention. The system **130** includes a moving magnet assembly (or stage) **132** that is moveable in a direction of travel, indicated at **134**, relative to a path **136**. For example, the magnet assembly **132** is supported relative to the path **136** for movement in the direction **134**, such as by low or no friction bearings (e.g., air bearings, not shown) to provide a desired air gap between the magnet assembly and the path.

The magnet assembly **132** includes a plurality of magnets **138, 140, 142, 144, 146, 148, 150,** and **152**, which are attached to and extend from a common side **156** of a back iron **158**. An opposite side **160** of the back iron **158** is dimensioned and configured to conform to flux lines of a magnetic circuit formed between the magnet assembly and the path when the path is energized. That is, the thickness of the back iron **158** between the opposed sides **156** and **160** is greater at locations between adjacent pairs of the magnets **12–26** than at locations generally aligned with centers of the respective magnets. As a result, the side surface **160** has a generally scalloped or ribbed appearance between its ends; e.g., it is formed of alternating peaks and valleys between spaced apart ends of the back iron. The particular cross-sectional configuration of the back iron can vary, such as described herein.

The path **136** includes a plurality of spaced apart teeth **162** that extend from a base portion **164** toward the magnet

6

assembly **132** located above the path **136**. Typically, the teeth **162** are oriented substantially parallel relative to each other and to the magnets **138–152**. The path **136** also includes windings **166** disposed around selected teeth. The windings **166** could be pre-wound coil assemblies or wound in-situ around the teeth **162**.

Those skilled in the art will understand and appreciate that the linear motor system typically includes a motor controller programmed and/or configured to control operation of the motor system **130**. For example, an encoder or other positioning system provides the controller with position information, based on which the controller controls energization of the associated windings **166** to effect desired movement of the magnet assembly **132** relative to the path. Those skilled in the art further will understand and appreciate various configurations of paths **136** and coil windings that could be utilized in combination with a magnet assembly in accordance with an aspect of the present invention.

FIG. 5 depicts a graphical representation of part of linear motor system **200**, similar to that shown in FIG. 4, illustrating magnetic flux lines **202** for magnet circuits formed by a magnet assembly **204** and energized windings of a motor path **206** in accordance with an aspect of the present invention. The magnet assembly **204** includes a plurality of permanent magnets **208, 210, 212, 214, 216, 218, 220,** and **222** that are operatively coupled to a back iron **226**.

In accordance with an aspect of the present invention, as shown in FIG. 5, the back iron **226** is dimensioned and configured to conform to the magnet flux lines that travel through the magnetic circuits formed of the magnet assembly and the path **206**. The back iron **226** has a greater cross-sectional dimension at locations at ends of the magnet assembly **204** and between adjacent pairs of magnets than at the locations generally centered with the respective magnets. Consequently, the overall mass of the moveable magnet assembly **204** is less than if such portions had not been removed. Additionally, because the selected portions have been removed according to the magnetic flux lines during energization of the path windings, the forces generated between the assembly **204** and the path remain substantially unchanged from a back plane that would include a substantially planar surface opposite the magnets.

To further reduce the mass of the magnet assembly, the magnets can be configured to have chamfered corners, so as to provide a generally elongated octagonal geometry. The particular dimensions and configuration of magnets and back iron can be further optimized based on magnetic finite element analysis. As a result, under Newton's law, the acceleration of the magnet assembly **204** relative to the path **206** is increased by an amount proportional to the reduced mass of the magnet assembly. Additionally, the geometry further provides flux distribution that is substantially sinusoidal distribution, which mitigates total harmonic distortion (THD). A lower THD corresponds to a more efficient motor.

As mentioned above, it is to be appreciated that various configurations of magnet assemblies can be implemented in accordance with an aspect of the present invention. FIGS. 6–9 illustrate some examples of other configurations of magnet assemblies that can be utilized. It will be understood and appreciated that such examples are solely for illustrative purposes and that numerous other possible configurations exist, all of which are within the scope of the appended claims.

FIG. 6 illustrates a magnet assembly **240** for use in a linear motor in accordance with an aspect of the present invention. The assembly **240** includes a plurality of elon-

7

gated permanent magnets **242** operatively coupled to a back iron **244**. As shown in FIG. 6, a cross-sectional dimension of the back iron **244** varies along its length between spaced apart end portions **246** and **248** of the back iron. In particular, a side surface **250** of the back iron **244** opposite a side **252** to which the magnets **242** are attached has a substantially triangular or sawtooth geometry having alternating peaks **254** and valleys **256**. The other side **252** is generally planar, although it includes slots or receptacles in which a portion of the respective magnets **242** is received. As a result of such back iron **244** configuration, the thickness of the back iron at locations between adjacent pairs of magnets **242** and at the end portions **246** and **248** is greater than its thickness at locations generally centered with the long axes of the respective magnets.

The geometry of the back iron **244** substantially conforms to magnetic flux lines that travel through the back iron from the magnets so as to provide extremely high flux densities. The geometry further enables the back iron **244** to have a reduced mass. The magnets also can be configured to have chamfered corners, so as to provide a generally elongated octagonal geometry, such that the mass of the magnet assembly is further reduced. The combination of high flux densities and reduced back iron mass result in a high performance motor capable of achieving rapid acceleration compared to conventional linear motors of similar size.

FIG. 7 illustrates a magnet assembly **260** for use in a linear motor in accordance with another aspect of the present invention. The assembly **260** includes a plurality of elongated permanent magnets **262** operatively coupled at a side surface **264** of a back iron **266**. The back iron **266** has a cross-sectional dimension that varies along its length between spaced apart end portions **268** and **270** in accordance with an aspect of the present invention. In particular, a side surface **272** of the back iron **244** opposite the side **264** to which the magnets **262** are attached has a plurality of substantially elongated rectangular peaks (or protrusions) **276**. The peaks **276** extend between side edges of the back iron. That is, the side **272** has alternating rectangular peaks **276** and valleys **278** to provide a generally square wave cross-sectional geometry between the end portions **268** and **270**. The peaks **276** are generally centered over spaces between adjacent pairs of the magnets **262** and the valleys are generally centered over the long axes of the respective magnets. The side **264** is generally planar, although it includes slots or receptacles in which a portion of the respective magnets **262** is received.

As a result of such geometry for the back iron **266**, the thickness of the back iron at locations between adjacent pairs of magnets **262** and at the end portions **268** and **270** is greater than its thickness at locations generally centered with the magnets. This geometry substantially conforms to magnetic flux lines that travel through the back iron **266** from the magnets **262** so as to provide extremely high flux densities, such as when associated windings of a motor incorporating the magnet assembly **260** are energized. The geometry further enables the back iron **266** to have a reduced mass. The combination of high flux densities and reduced back iron mass result in a high performance motor capable of achieving rapid acceleration compared to conventional linear motors of similar size.

FIG. 8 depicts yet another magnet assembly **280** in accordance with an aspect of the present invention. The magnet assembly includes a plurality of permanent magnets **282** operative connected to a generally planar side surface **284** of a back iron **286**. Specifically, a portion of the magnets **282** can be received in associated slots or receptacles formed

8

in the side **284**, although the magnets could be attached to the back iron in the absence of such slots.

In accordance with an aspect of the present invention, a side surface **288** of the back iron **286** opposite the side **284** to which the magnets are connected is dimensioned and configured to substantially conform to magnetic flux lines associated with the magnet assembly when exposed to magnetic fields from energized windings of an associated motor path (not shown). In the example of FIG. 8, the side surface **288** has alternating peaks **290** and valleys **292** to provide a generally sinusoidal cross-sectional configuration between spaced apart end portions **294** and **296** of the back iron **286**. The peaks **290** are generally centered over spaces located between adjacent pairs of magnets **282** and the valleys **292** are generally centered over corresponding centers of the respective magnets.

As a result of the back iron geometry shown in FIG. 8, the magnet assembly **280** is able complete magnetic circuits in an associated linear motor so as to provide extremely high flux densities, such as when associated windings of the motor incorporating the magnet assembly are energized. The geometry further provides the back iron **286** with a reduced mass. To further reduce the mass of the magnet assembly, the magnets **282** can be configured as a generally elongated octagon, such as by removing corner portions of the magnets. The combination of high flux densities and reduced back iron mass result in a high performance motor capable of achieving rapid acceleration compared to conventional linear motors of similar size.

What has been described above includes exemplary implementations of the present invention. It is, of course, not possible to describe every conceivable combination of components or methodologies for purposes of describing the present invention, but one of ordinary skill in the art will recognize that many further combinations and permutations of the present invention are possible. For example, a magnet assembly, in accordance with an aspect of the present invention can have different numbers of magnets from that shown and described herein. Additionally, the magnet assembly can have a different contour from the substantially flat configuration shown herein, such as to conform to the contour of the path with which the magnet assembly is to be utilized. Accordingly, the present invention is intended to embrace all such alterations, modifications and variations that fall within the spirit and scope of the appended claims.

What is claimed is:

1. A magnet assembly for a motor, comprising:

a conducting plate having first and second opposed surfaces that extend a length between spaced apart end portions of the plate;

an array of magnets operatively connected to the first surface of the plate and arranged in a spaced apart relationship along the length of plate; and

the plate having a cross-sectional dimension between the first and second surfaces that varies between the end portions so as to substantially conform to a magnetic field distribution of the motor and to reduce leakage flux.

2. The magnet assembly of claim 1, each of the magnets further comprising an elongated standard rectangular magnet oriented substantially transverse to an axis extending through the end portions of the plate.

3. The magnet assembly of claim 2, each of the magnets having a generally elongated octagonal configuration extending between generally parallel side edges of the plate, the side edges extending between the end portions of the plate.

9

4. The magnet assembly of claim 2, the plate having a greater cross-sectional dimension between the first and second surfaces at locations between adjacent pairs of the magnets than at locations generally aligned with centers of the respective magnets.

5. The magnet assembly of claim 2, the second surface of the plate having a cross-sectional configuration between the end portions of the plate that includes a plurality of alternating peaks and valleys.

6. The magnet assembly of claim 5, at least a substantial number of the peaks being generally aligned with spaces located between adjacent pairs of the magnets.

7. The magnet assembly of claim 6, the valleys being generally aligned with centers of respective magnets.

8. The magnet assembly of claim 7, each of the peaks and valleys extending between side edges of the plate, the side edges extending between the end portions of the plate.

9. The magnet assembly of claim 8, each of the peaks and valleys having a width extending between the end portions of the plate that is greater than or equal to zero inches and less than one-half a width of an associated one of the magnets.

10. The magnet assembly of claim 5, the second surface of the plate having a generally triangular or saw tooth cross-sectional geometry.

11. The magnet assembly of claim 5, the second surface of the plate having a generally sinusoidal cross-sectional geometry.

12. The magnet assembly of claim 5, the second surface of the plate having a cross-sectional geometry having a plurality of alternating rectangular peaks and valleys.

13. The magnet assembly of claim 1, the conducting plate being formed of a non-linear material.

10

14. The magnet assembly of claim 13, the conducting plate being formed of vanadium permeadur.

15. The magnet assembly of claim 1 in combination with a linear motor path, comprising:

the path including a plurality of windings operative to provide a magnetic field when energized; and

the magnet assembly supported for movement relative to the path according to the magnetic field of the path.

16. A magnetic assembly for a motor, comprising:

means for assembling a plurality of magnets operatively associated with a magnetically conductive plate, wherein the magnets are placed in a spaced apart relationship;

means for distributing the magnets to substantially conform to magnetic flux that travels through the magnetically conductive plate when the magnet is exposed to a magnetic field wherein the magnetically conductive plate has a cross-sectional dimension which varies between opposed ends of the magnetically conductive plate.

17. The system of claim 16, the magnetically conductive plate is a back iron.

18. The system of claim 16, the cross sectional dimension varies to reduce leakage flux.

19. The system of claim 16, the cross sectional dimension of the magnetically conductive plate is greater at locations between adjacent pairs of magnets than at locations centered with the respective magnets.

* * * * *