


Raster survey matrix: standard L1 versus line-to-line planner
Each cell: AUTO course time / requested-line coverage / survey-leg RMS error

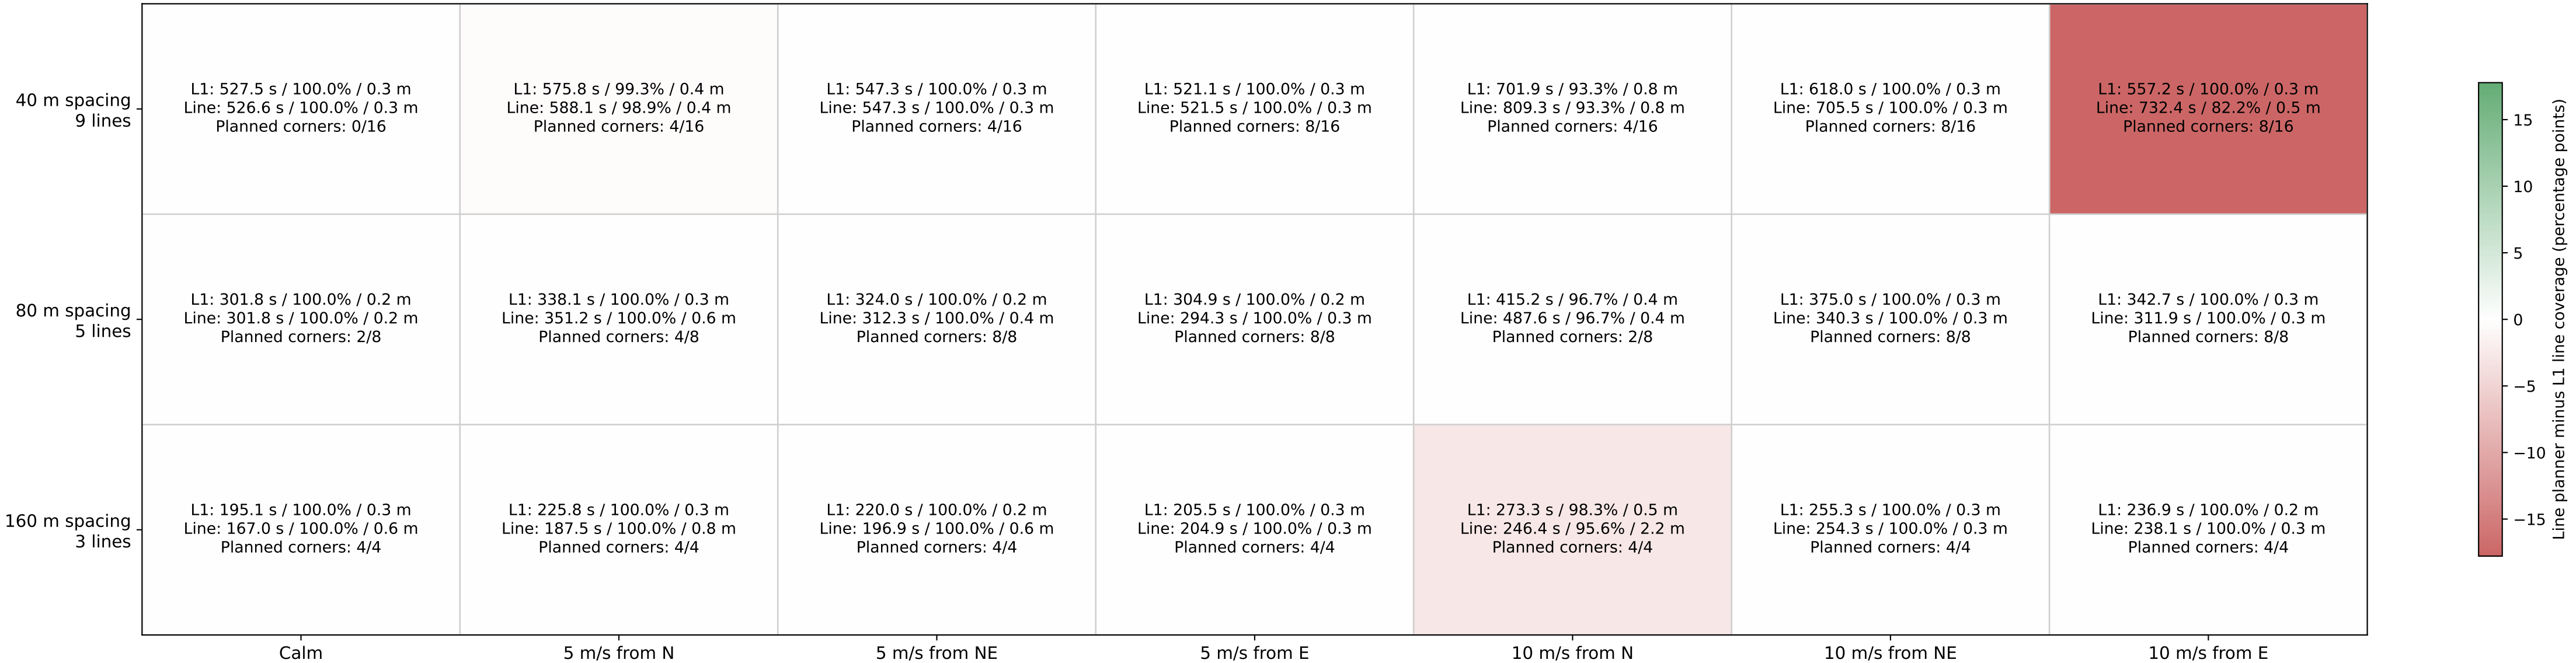

Fixed survey area 600 × 320 m; 200 m turnaround extension; 20 m/s cruise; 45° bank limit; zero turbulence.
Coverage: 10 m along-line bins flown within 10 m cross-track and 15° ground course; one flight per controller/condition. Calm evaluated once per spacing.