


K1 is required for Aux 24V Out and contact set 1.  
K2 is required for contact sets 2 and 3.

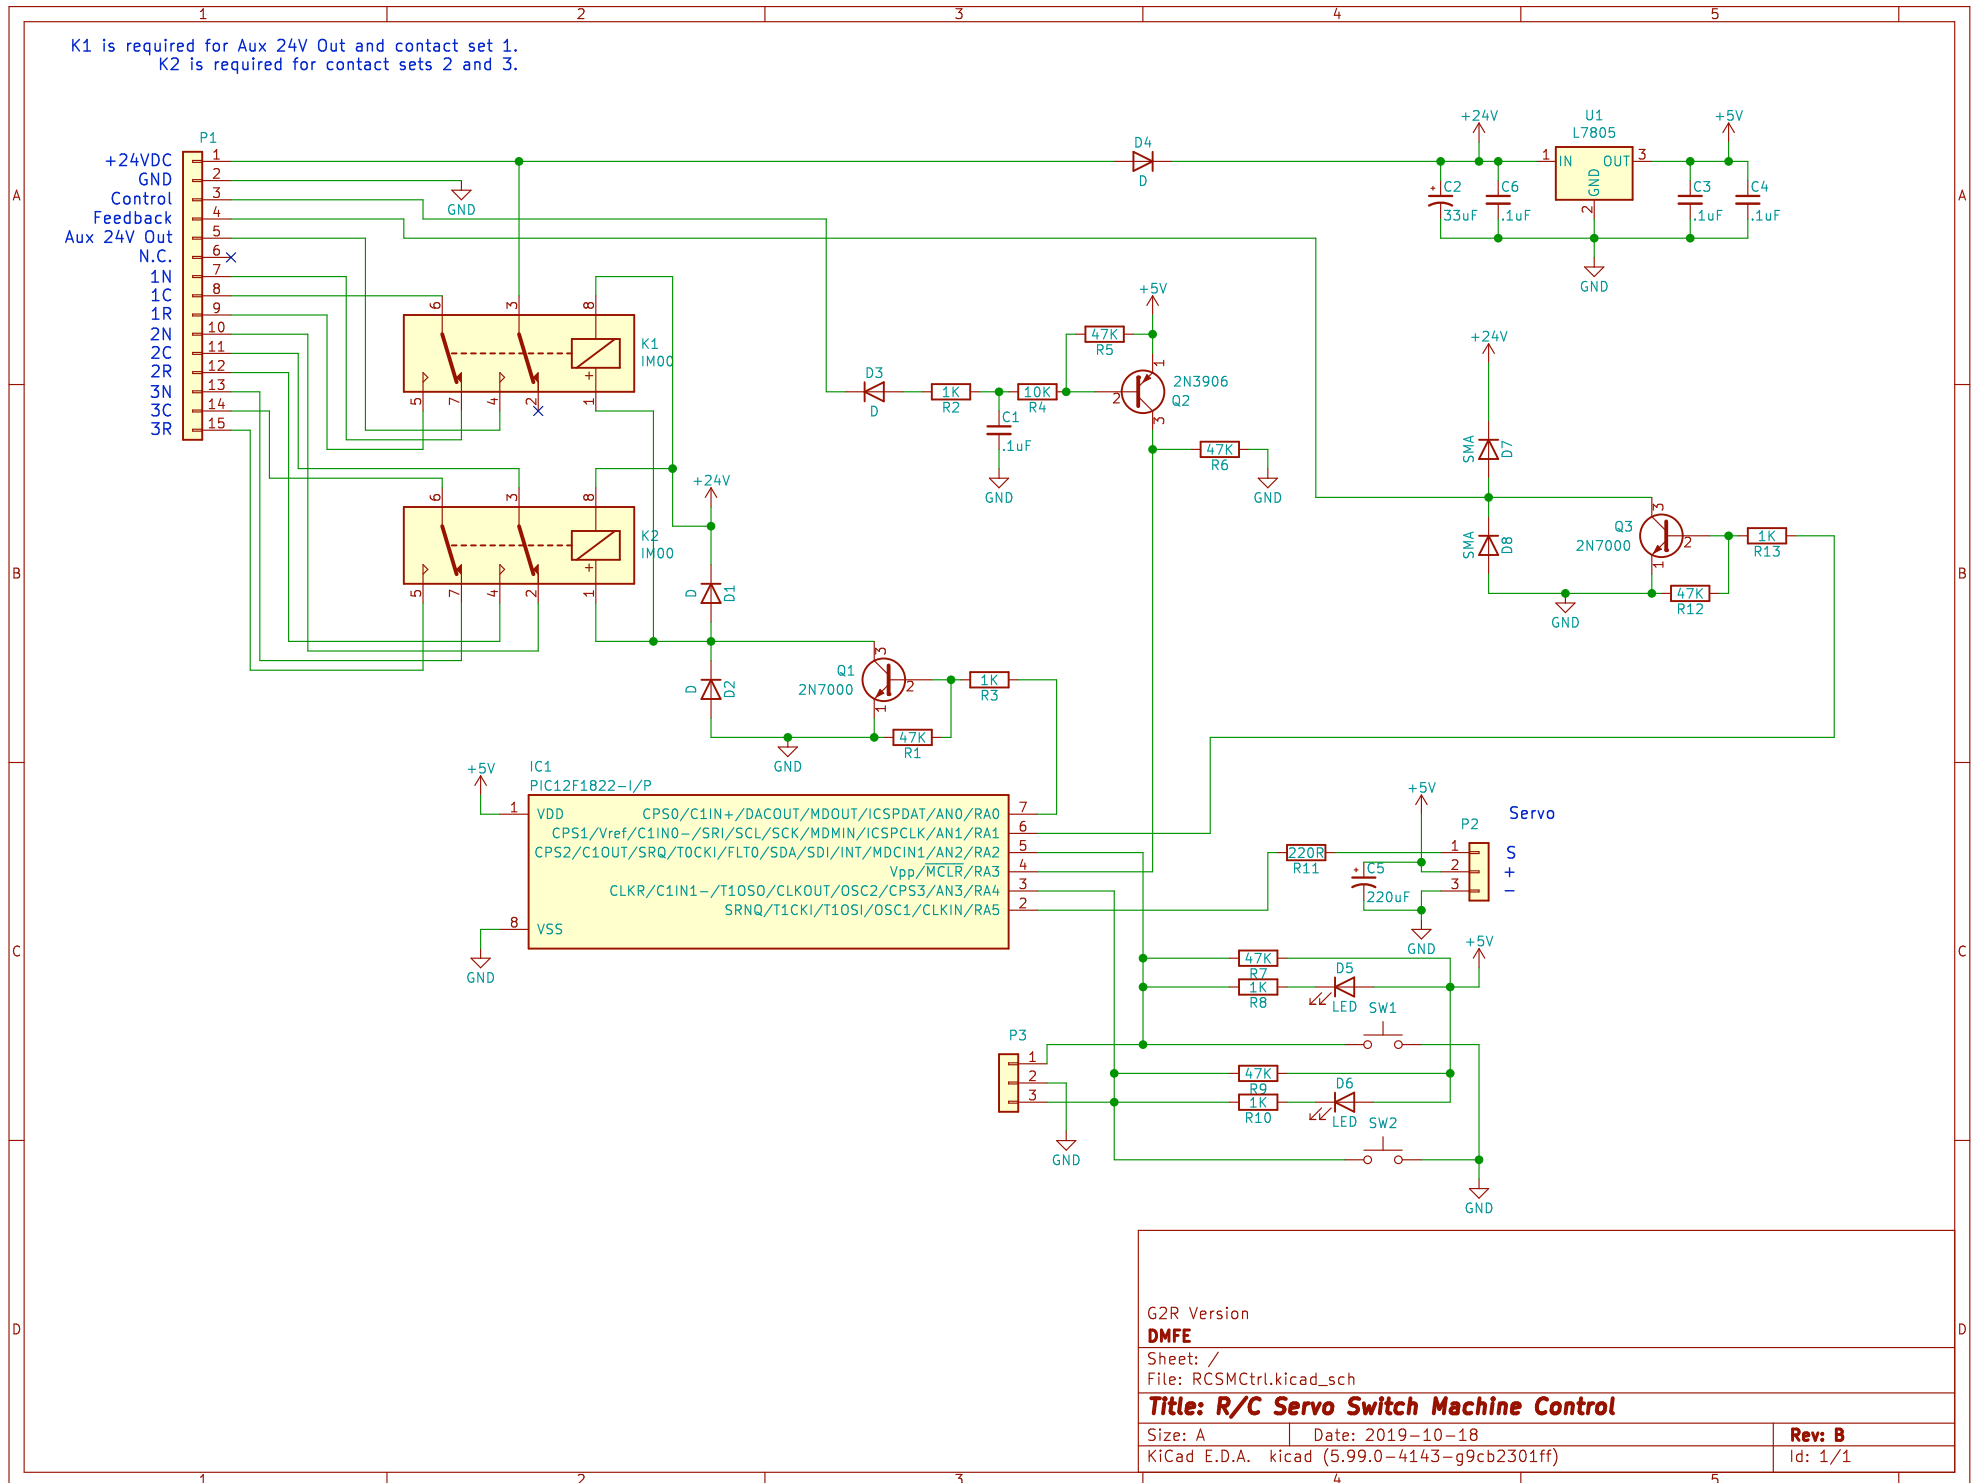

G2R Version

DMFE

Sheet: /

File: R/CSMCtrl.kicad\_sch

**Title: R/C Servo Switch Machine Control**

Size: A Date: 2019-10-18

KiCad E.D.A. kicad (5.99.0-4143-g9cb2301ff)

Rev: B

Id: 1/1