








Depending on firmware P2 can be used for I2C Bus, digital or analog position control.

The Mode switch is there because I couldn't leave a pin unused.

I2C (optional)



Mode (optional)

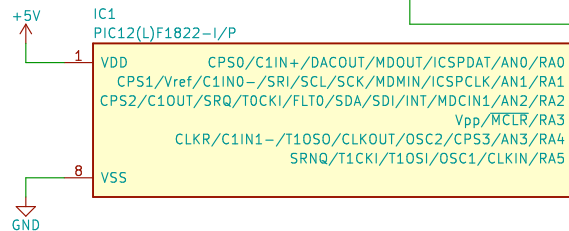

GPL v2

Oxford V.U.E., Inc.

Sheet: /

File: ServoTester1822.sch

Title: R/C Servo Tester

Size: A Date: 9/19/2015

KiCad E.D.A. kicad (2015-09-17 BZR 6202)-product

Rev: n/c

Id: 1/1