

### Introduction

#### Chapter 1

- Uses of Computer Networks
- Network Hardware
- Network Software
- Reference Models
- Example Networks
- Network Standardization
- Metric Units



## Uses of Computer Networks

<u>Computer networks</u> are collections of autonomous computers, e.g., the Internet

#### They have many uses:

- Business Applications »
- Home Applications »
- Mobile Users »

#### These uses raise:


Social Issues »

This text covers networks for all of these uses



### **Business Applications**

Companies use networks and computers for <u>resource sharing</u> with the <u>client-server</u> model:

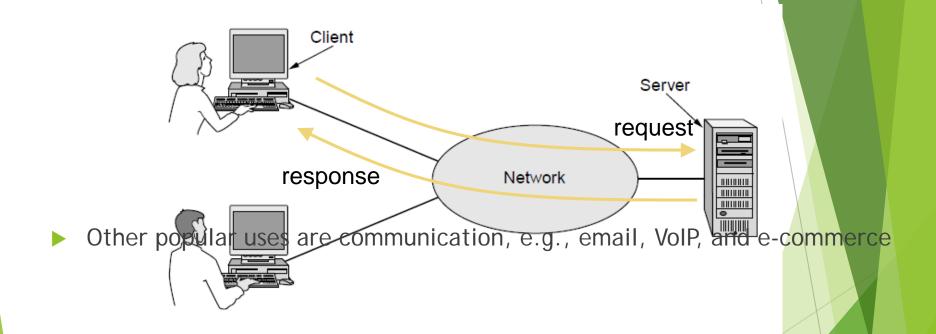




Wetherall, 2011

### Home Applications

- Homes contain many networked devices, e.g., computers, TVs, connected to the Internet by cable, DSL, wireless, etc.
- Home users communicate, e.g., social networks, consume content, e.g., video, and transact, e.g., auctions
- Some application use the <u>peer-to-peer</u> model in which there are no fixed clients and servers:

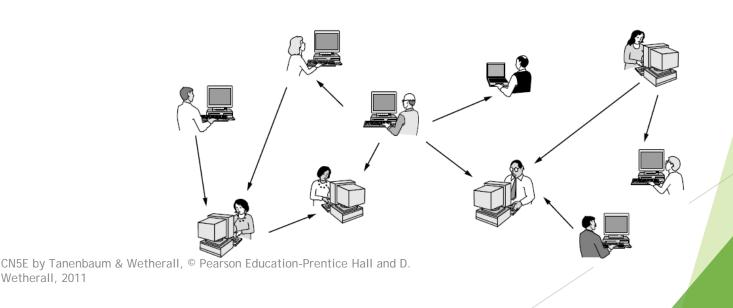



### Mobile Users

- Tablets, laptops, and smart phones are popular devices; WiFi hotspots and 3G cellular provide wireless connectivity.
- Mobile users communicate, e.g., voice and texts, consume content, e.g., video and Web, and use sensors, e.g., GPS.
- Wireless and mobile are related but different:

Wireless	Mobile	Typical applications
No	No	Desktop computers in offices
No	Yes	A notebook computer used in a hotel room
Yes	No	Networks in unwired buildings
Yes	Yes	Store inventory with a handheld computer



### Social Issues

- Network neutrality no network restrictions
- ► Content ownership, e.g., DMCA takedowns
- Anonymity and censorship
- Privacy, e.g., Web tracking and profiling
- ► Theft, e.g., botnets and phishing




### **Network Hardware**

Networks can be classified by their scale:

Scale	Туре
Vicinity	PAN (Personal Area Network) »
Building	LAN (Local Area Network) »
City	MAN (Metropolitan Area Network) »
Country	WAN (Wide Area Network) »
Planet	The Internet (network of all networks)

### Personal Area Network


Connect devices over the range of a person Example of a Bluetooth (wireless) PAN:

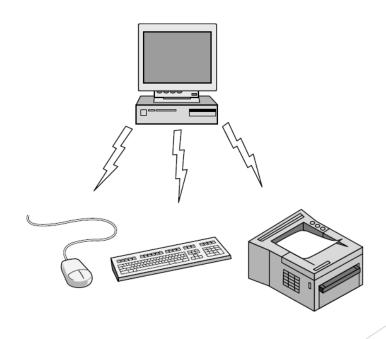


CN5E by Tanenbaum & Wetherall, @ Pearson Education-Prentice Hall and D. Wetherall, 2011

#### Local Area Networks

- Connect devices in a home or office building
- Called <u>enterprise network</u> in a company



Wireless LAN with 802.11

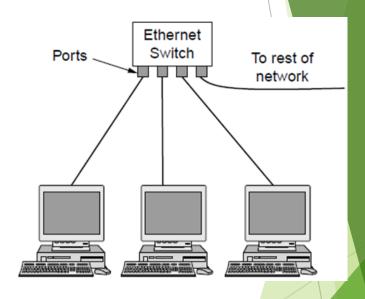


Wired LAN with switched Ethernet

CN5E by Tanenbaum & Wetherall,  $^{\odot}$  Pearson Education-Prentice Hall and D. Wetherall, 2011



### Metropolitan Area Networks


Connect devices over a metropolitan area Example MAN based on cable TV:

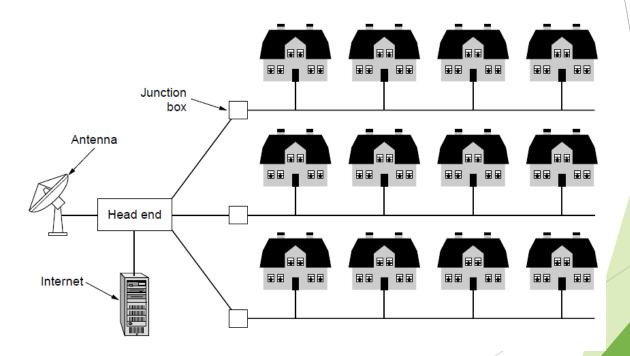



## Wide Area Networks (1)


- Connect devices over a country
- Example WAN connecting three branch offices:

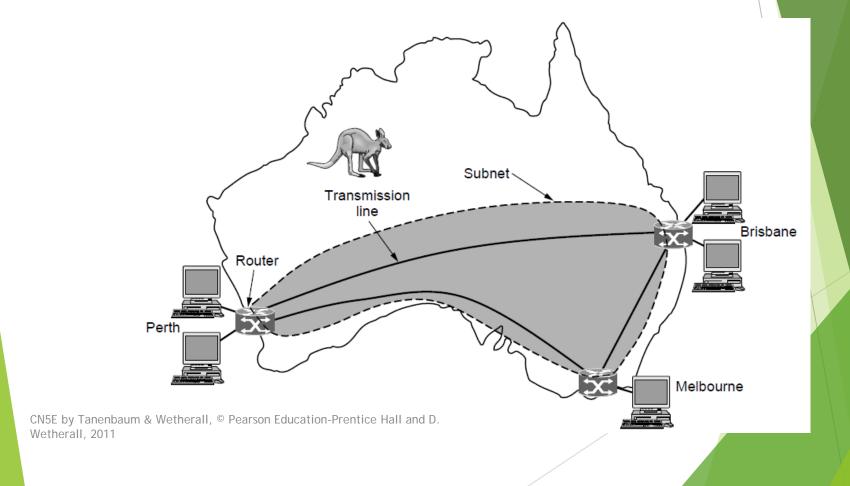



## Wide Area Networks (2)

- ► An ISP (Internet Service Provider) network is also a WAN.
- Customers buy connectivity from the ISP to use it.

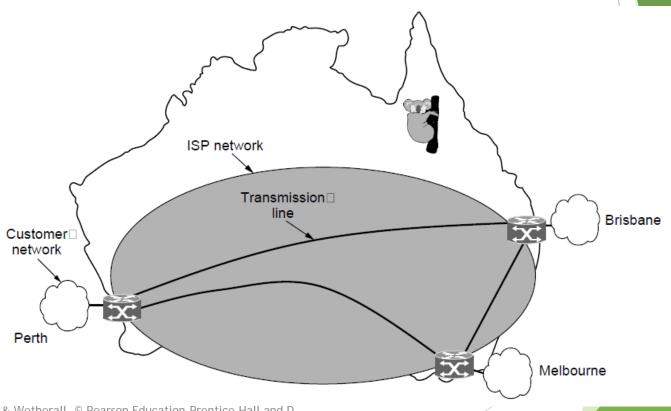


CN5E by Tanenbaum & Wetherall,  $\mbox{\ensuremath{\circ}}$  Pearson Education-Prentice Hall and D. Wetherall, 2011



## Wide Area Networks (3)

A VPN (Virtual Private Network) is a WAN built from virtual links that run on top of the Internet.

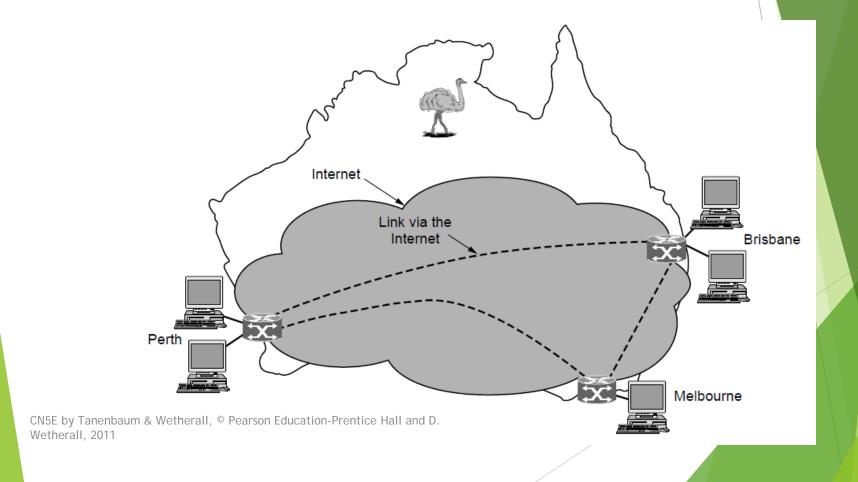


### **Network Software**

- Protocol layers »
- Design issues for the layers »
- Connection-oriented vs. connectionless service »
- Service primitives »
- Relationship of services to protocols »

## Protocol Layers (1)

Protocol layering is the main structuring method used to divide up network functionality.

- Each protocol instance talks virtually to its <u>peer</u>
- Each layer communicates only by using the one below
- Lower layer <u>services</u> are accessed by an <u>interface</u>
- At bottom, messages are carried by the medium

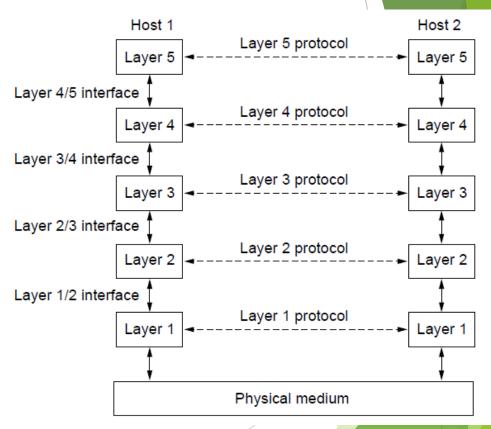


## Protocol Layers (2)

Example: the philosopher-translator-secretary architecture

Each protocol at different layers serves a different


purpose

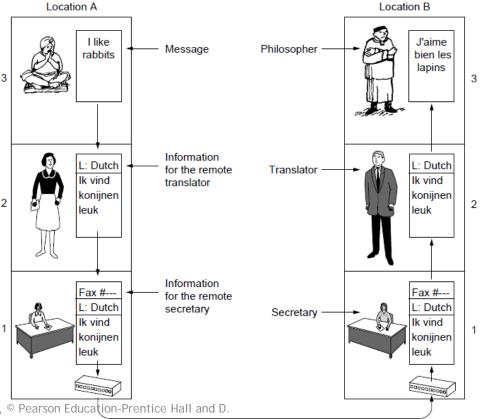

CN5E by Tanenbaum & Wetherall, © Pearson Education-Prentice Hall and D. Wetherall, 2011

## Protocol Layers (3)

► Each lower layer adds its own <a href="header">header</a> (with control information) to the message to transmit and removes it on receive

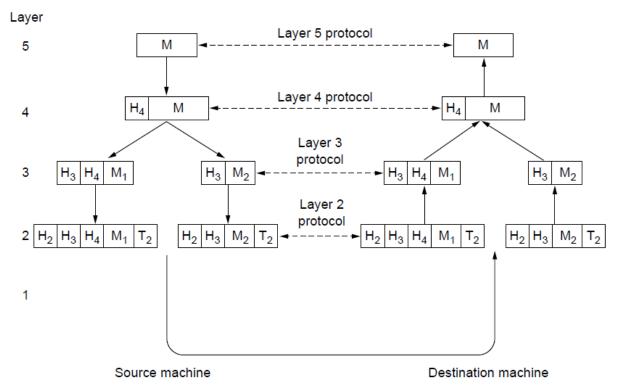

Layers may also split and join messages, etc.



## Design Issues for the Layers

Each layer solves a particular problem but must include mechanisms to address a set of recurring design issues

Issue	Example mechanisms at different layers
Reliability despite failures	Codes for error detection/correction (§3.2, 3.3) Routing around failures (§5.2)
Network growth and evolution	Addressing (§5.6) and naming (§7.1) Protocol layering (§1.3)
Allocation of resources like bandwidth	Multiple access (§4.2) Congestion control (§5.3, 6.3)
Security against various threats	Confidentiality of messages (§8.2, 8.6) Authentication of communicating parties (§8.7)



# Connection-Oriented vs. Connectionless

- Service provided by a layer may be kinds of either:
  - Connection-oriented, must be set up for ongoing use (and torn down after use), e.g., phone call
  - Connectionless, messages are handled separately, e.g., postal delivery

	Service	Example	
Connection- oriented	Reliable message stream	Sequence of pages	
	Reliable byte stream	Movie download	
	Unreliable connection	Voice over IP	
	Unreliable datagram	Electronic junk mail□	
Connection- less	Acknowledged datagram	Text messaging	
	Request-reply	Database query	

CN5E by Tanenbaum & Wetherall, © Pearson Education-Prentice Hall and D. Wetherall, 2011

### Service Primitives (1)


- A service is provided to the layer above as primitives
- Hypothetical example of service primitives that may provide a reliable byte stream (connection-oriented) service:

Primitive	Meaning
LISTEN	Block waiting for an incoming connection
CONNECT	Establish a connection with a waiting peer
ACCEPT	Accept an incoming connection from a peer
RECEIVE	Block waiting for an incoming message
SEND	Send a message to the peer
DISCONNECT	Terminate a connection



## Service Primitives (2)

Hypothetical example of how these primitives may be used for a client-server interaction

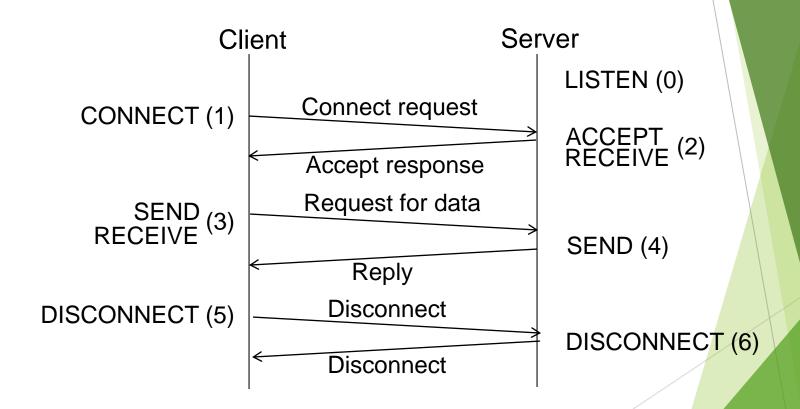


### Relationship of Services to Protocols

#### Recap:

- ► A layer provides a <u>service</u> to the one above
- A layer talks to its peer using a <u>protocol</u>

[vertical]
[horizontal]

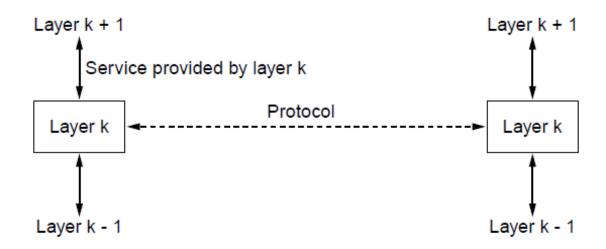


### Reference Models

Reference models describe the layers in a network architecture

- OSI reference model »
- TCP/IP reference model »
- Model used for this text »
- Critique of OSI and TCP/IP »

#### **OSI Reference Model**


A principled, international standard, seven layer model to connect different systems

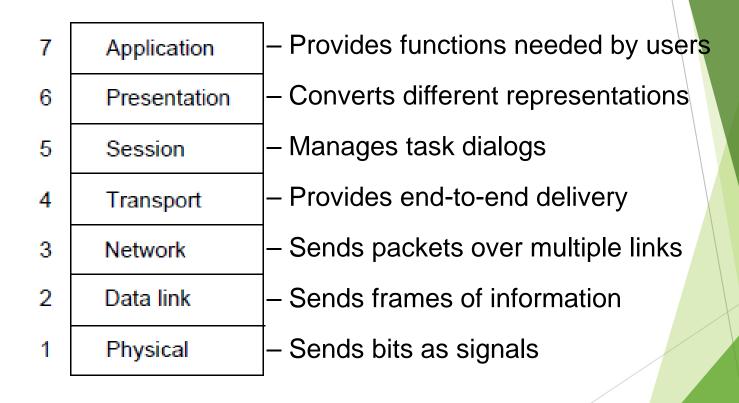



### TCP/IP Reference Model

A four layer model derived from experimentation; omits some OSI layers and uses the IP as the network layer.

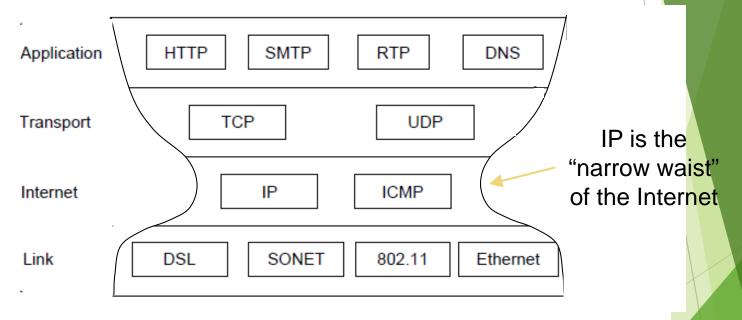

Protocols are shown in their respective layers

### Model Used in this Book

It is based on the TCP/IP model but we call out the physical layer and look beyond Internet protocols.

5	Application
4	Transport
3	Network
2	Link
1	Physical

### Critique of OSI & TCP/IP

#### OSI:

- + Very influential model with clear concepts
- Models, protocols and adoption all bogged down by politics and complexity

#### TCP/IP:

- + Very successful protocols that worked well and thrived
- ▶ Weak model derived after the fact from protocols


## **Example Networks**

- The Internet »
- 3G mobile phone networks »
- Wireless LANs »
- RFID and sensor networks »



## Internet (1)

Before the Internet was the ARPANET, a decentralized, packet-switched network based on Baran's ideas.

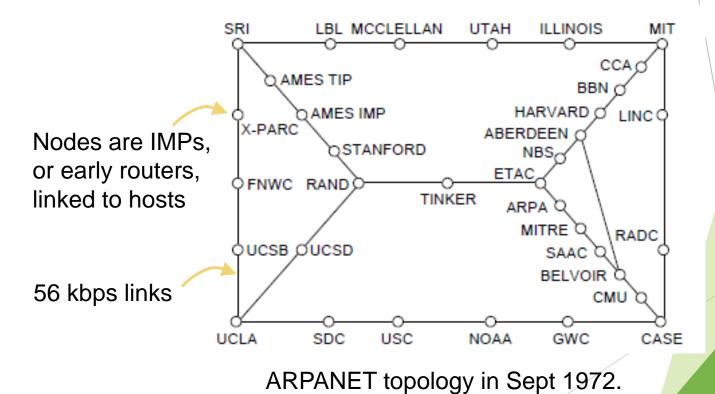


CN5E by Tanenbaum & Wetherall, © Pearson Education-Prentice Hall and D. Wetherall, 2011



## Internet (2)

The early Internet used NSFNET (1985-1995) as its backbone; universities connected to get on the Internet

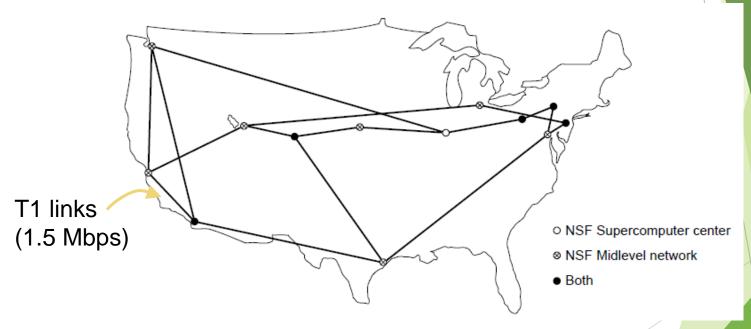

NSFNET topology in 1988




### Internet (3)

#### The modern Internet is more complex:

- ▶ ISP networks serve as the Internet backbone
- ISPs connect or peer to exchange traffic at IXPs
- Within each network routers switch packets
- Between networks, traffic exchange is set by business agreements
- Customers connect at the edge by many means
  - ► Cable, DSL, Fiber-to-the-Home, 3G/4G wireless, dialup
- Data centers concentrate many servers ("the cloud")
- Most traffic is content from data centers (esp. video)
- ▶ The architecture continues to evolve

### Internet (4)

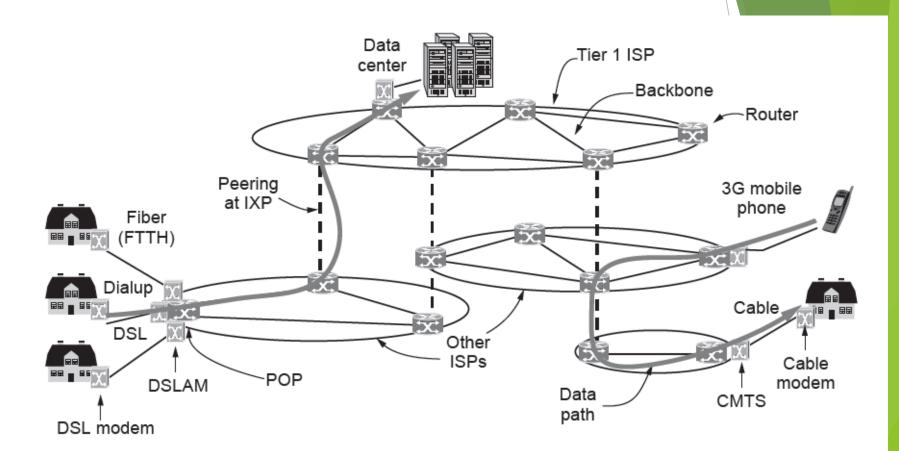


#### Architecture of the Internet

CN5E by Tanenbaum & Wetherall,  $^{\odot}$  Pearson Education-Prentice Hall and D. Wetherall, 2011

### 3G Mobile Phone Networks (1)


3G network is based on spatial cells; each cell provides wireless service to mobiles within it via a base station

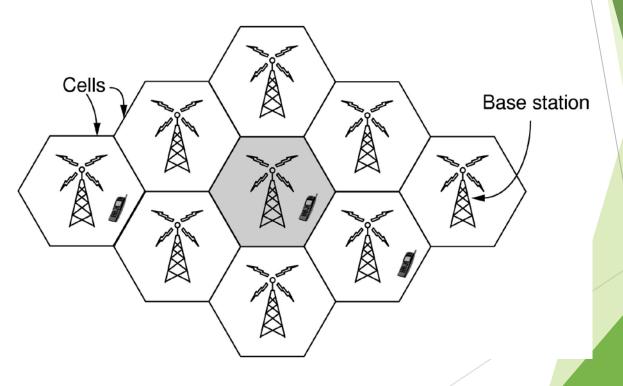

CN5E by Tanenbaum & Wetherall, © Pearson Education-Prentice Hall and D. Wetherall, 2011


### 3G Mobile Phone Networks (2)

Base stations connect to the core network to find other mobiles and send data to the phone network and Internet

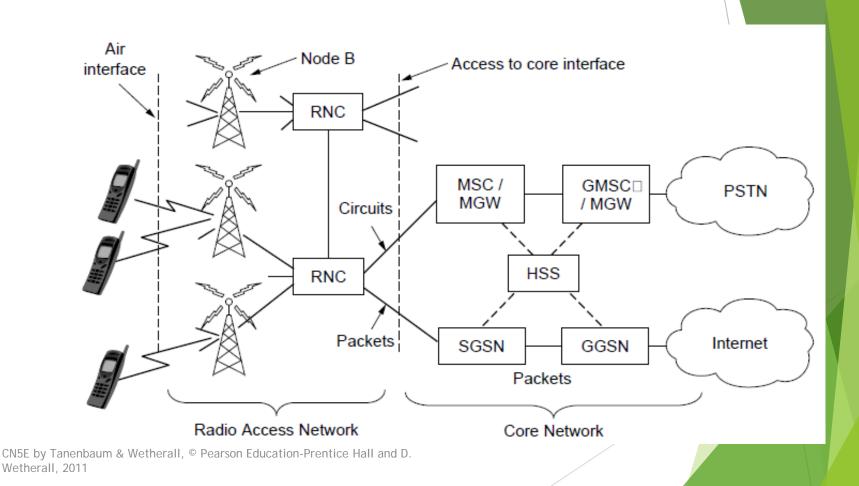


### 3G Mobile Phone Networks (3)

As mobiles move, base stations hand them off from one cell to the next, and the network tracks their location

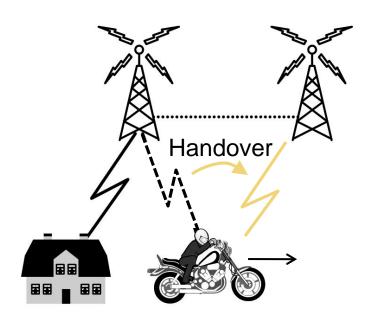

### Wireless LANs (1)


In 802.11, clients communicate via an AP (Access Point) that is wired to the rest of the network.

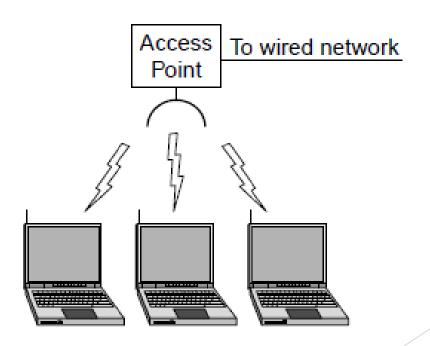

## Wireless LANs (2)

Signals in the 2.4GHz ISM band vary in strength due to many effects, such as multipath fading due to reflections

requires complex transmission schemes, e.g., OFDM

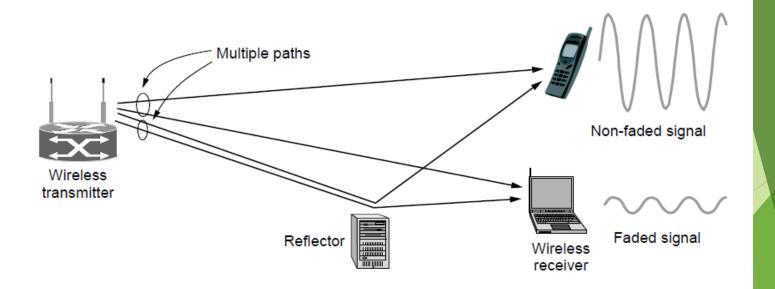




## Wireless LANs (3)

Radio broadcasts interfere with each other, and radio ranges may incompletely overlap


► CSMA (Carrier Sense Multiple Access) designs are used

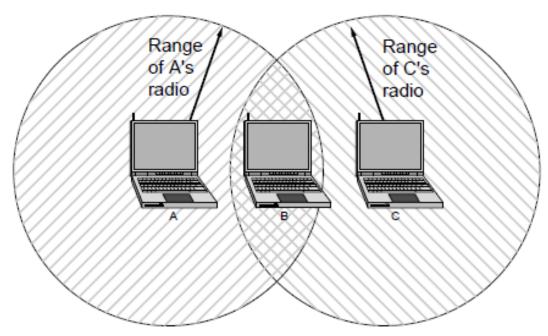

### RFID and Sensor Networks (1)

#### Passive UHF RFID networks everyday objects:


- ► Tags (stickers with not even a battery) are placed on objects
- ▶ Readers send signals that the tags reflect to communicate

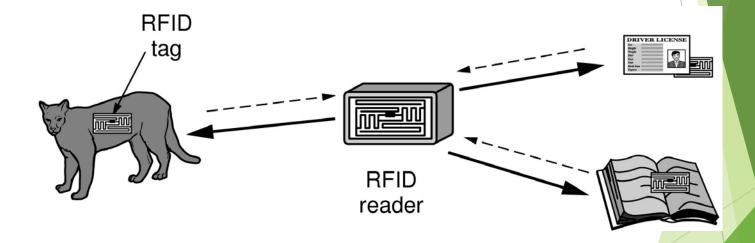

### RFID and Sensor Networks (2)

Sensor networks spread small devices over an area:

▶ Devices send sensed data to collector via wireless hops

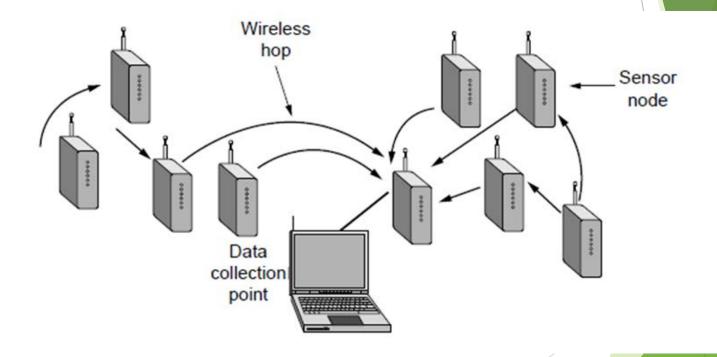

### **Network Standardization**

Standards define what is needed for <u>interoperability</u>

Some of the many standards bodies:

Body	Area	Examples
ITU	Telecommunications	G.992, ADSL H.264, MPEG4
IEEE	Communications	802.3, Ethernet 802.11, WiFi
IETF	Internet	RFC 2616, HTTP/1.1 RFC 1034/1035, DNS
W3C	Web	HTML5 standard CSS standard



#### **Metric Units**

The main prefixes we use:

Prefix	Exp.	prefix	exp.
K(ilo)	10 <sup>3</sup>	m(illi)	10 <sup>-3</sup>
M(ega)	10 <sup>6</sup>	μ(micro)	10-6
G(iga)	10 <sup>9</sup>	n(ano)	10-9

- ▶ Use powers of 10 for rates, powers of 2 for storage
  - ► E.g., 1 Mbps = 1,000,000 bps, 1 KB = 1024 bytes
- ▶ "B" is for bytes, "b" is for bits

End
Chapter 1