


HEADER (8 bytes — plaintext)

PAYLOAD (up to 50 bytes — AES-128-CTR encrypted)

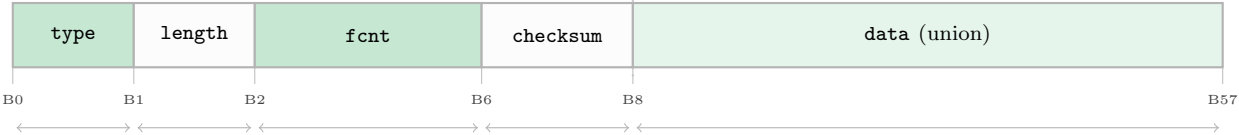

Field	Type	Description
type	messageType (1 B)	Message kind: tells the receiver how to parse data
length	uint8_t (1 B)	Valid bytes in data. Enables dynamic-length transmissions
fcnt	uint32_t (4 B)	Frame Counter: anti-replay guard and AES-128 IV source
checksum	uint16_t (2 B)	Packet integrity check against RF corruption
data	union (≤ 50 B)	Encrypted payload. Structure depends on type

Only bytes B0–B(8+length–1) are transmitted over the air. Unused trailing bytes in data are discarded before sending.