



RevGen / Handheld carrier board

Core voice remote verified on hardware. Charging components and charging-related behavior remain untested; first tests planned on PCB prototype.


01 BATTERY / XIAO CHARGING CONNECTION

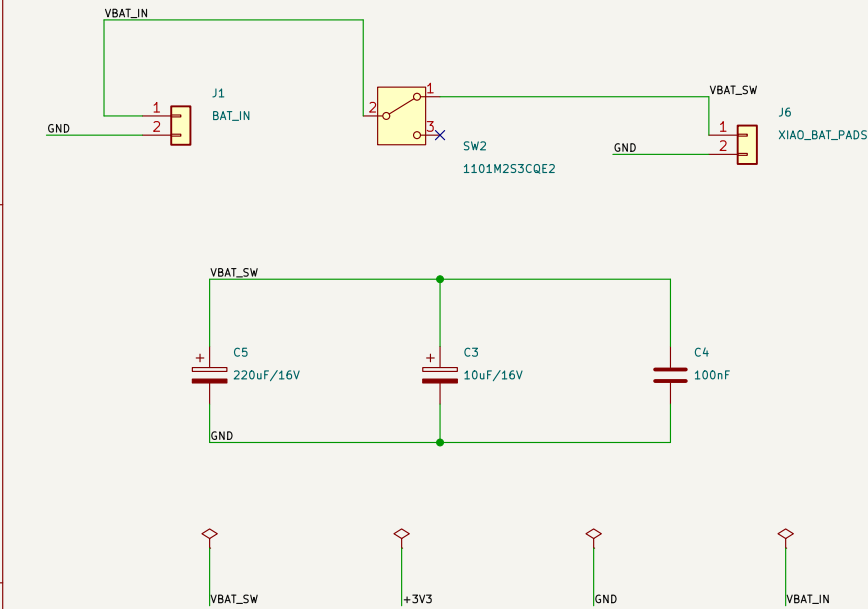


02 XIAO ESP32S3 / GPIO INTERFACE

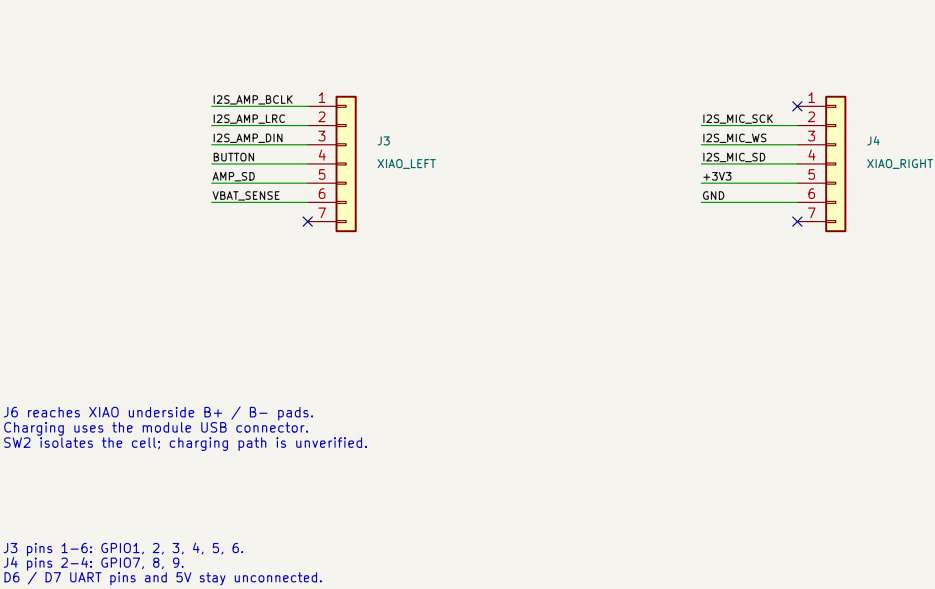

03 INMP441 MICROPHONE

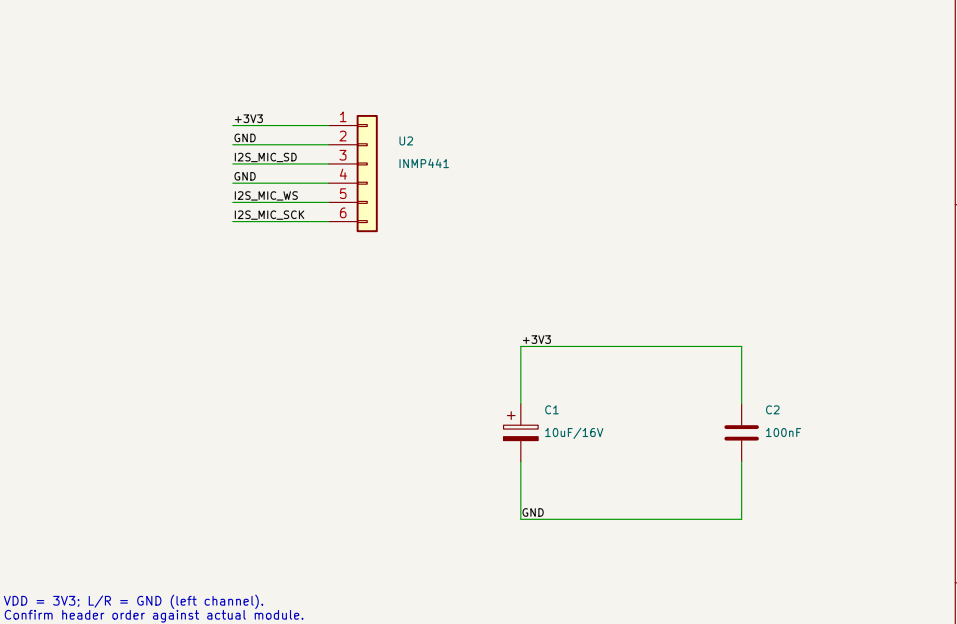


04 PUSH-TO-TALK / WAKE

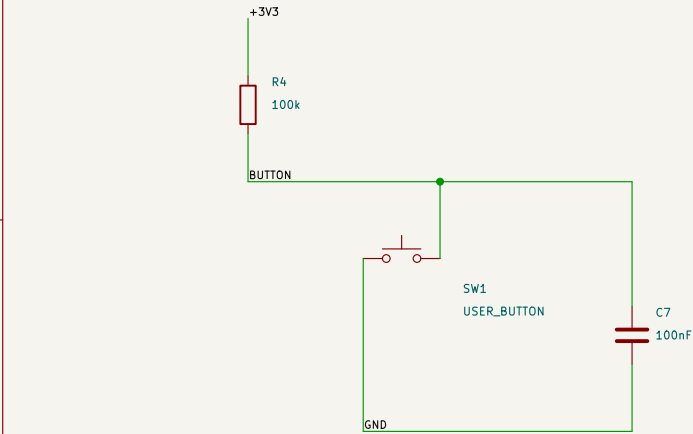


Core button behavior verified.
R4 adds an external pull-up; C7 filters the input.

05 BATTERY VOLTAGE SENSE

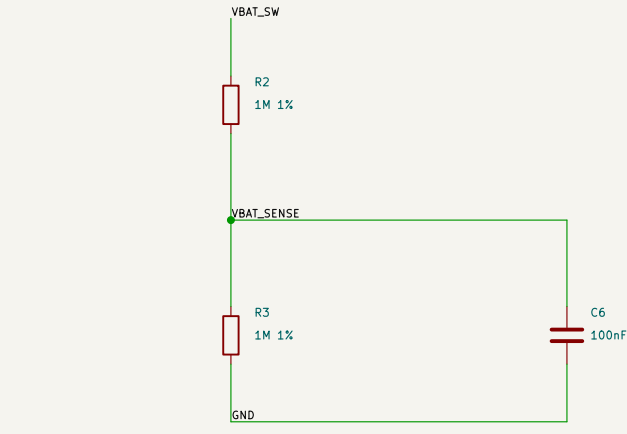


R2 / R3 = 1M, 1%. C6 = 100nF.
Divider and battery-reading firmware unverified.
PCB prototype: validate before enabling alerts.

06 MAX98357A / SPEAKER

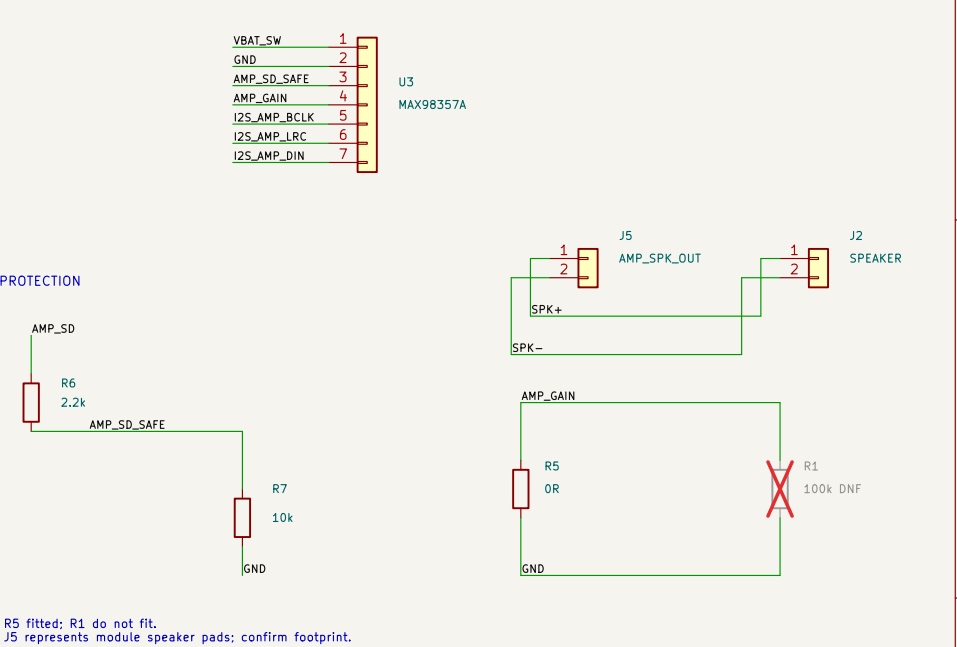

07 TEST ACCESS

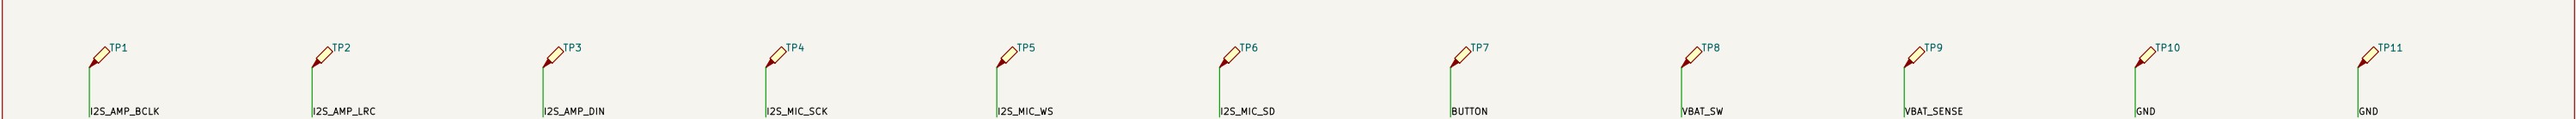

Named nets join functional sections. Wires show local circuits.
A2: electrical/CAD checks complete; physical fit and charging tests pending.

Core remote verified; charging hardware and behavior NOT YET TESTED