中貿有限公司 友貿電機廠 NICHIBO DC MOTOR

客戶名稱(Customer): JamecoElectronics 資料檔名(Filename): 樣品PC260机种

馬達型號(MotorModel): PC-260SB-14280-LNR/38


額定電壓(Voltage): 12.0V

額定輸出(RatedPowerOutput): 1.79W

實驗室溫度(AmbientTemperature): 25 無載轉速(No-LoadR.P.M): 9000


無載等逐(No-LoadCurrent): 9000 無載電流(No-LoadCurrent): 82mA 啟動轉矩(StartedTorque): 151g-cm 測試日期(TestDate): 2017.6.16


	轉 速 R.P.M.	電 流 Amps	轉 矩 Grcm	效 率 Eff(%)	輸出功率 W(out)	輸入功率 W(in)
堵住狀態 (Locked Rotor)	0	1.363	151.830	0	0.000	16.234
最大扭力 (Max-Torque)	0	1.363	151.830	0	0.000	16.234
最大效率 (Max-Efficiency)	7524	0.250	23.250	61	1.796	2.968
最大輸出功率(Max-W(out)	4500	0.710	75.933	42	3.509	8.451

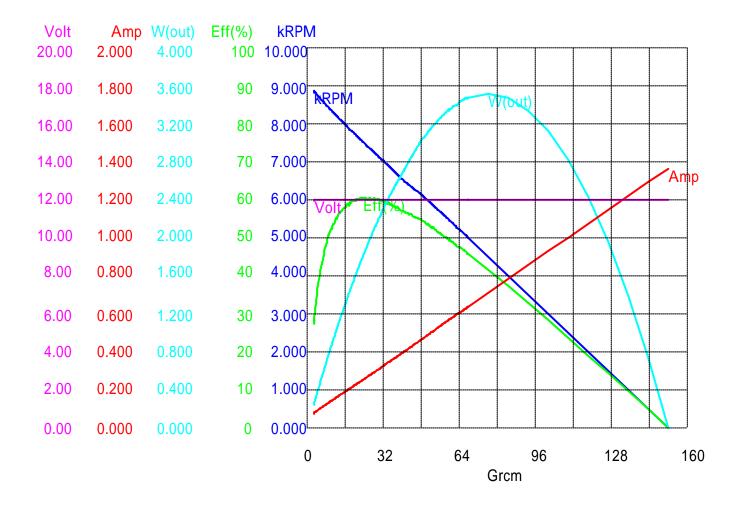



扭力常數(Torque Constant): 114.6233 馬達常數(Motor Constant): 31.3451

DIRECTION OF ROTATION



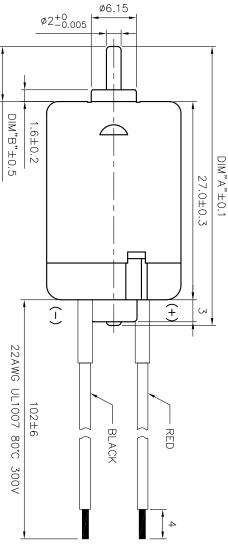





Varistor:E10 voltage 13 to 18.4 VDC

NOTE:

1.LENGTH OF SHAFT DIM "A" 38.0 mm.
2.FRONT EXTENSION DIM "B" 7.5 mm.WHILE THE SHAFT AT EXTREMELY RIGHT POSITION.
3.END PLAY: 0.05-0.60 mm.



中貿有限公司 NICHIBO TAIWAN CORP.

8號10樓之1 IUAREA, TAIPEI, -2658-8460	会比市104 内湖區内湖路一段308號10樓之10F-1,NO.308, SEC.1, NEIHU RD., NEIHUAREA, TAIPEI, AIWAN (R.O.C)
--	---

FAX:86-755-2969-5566	Ĭ.	中國演用自保到中質女配沙井線一名国家上来配CANTOW IND DIST HOWER SHA IING BAOAN SHENZHEN	出解的分類を表現のでは、	友貿電機(深圳)有限公司	
比例	0.00	-	0	未注公差	
FREE	±0.05	±0.1	±0.3	公差	
Z	MODEL	经验	TAININI	NAME 科	
mm		PC-260SB-142		Jameco Electronics	
DATE		3B-142			
2017/6/16		280-LNR/38			