




Input Impedance 500 M || 2 pF
 Scope Impedance 1 M || 16 pF
 Attenuation 500:1
 Max. Voltage 17.5 kV
 Max. Dissipation 2.5 W
 Coax. Cable RG316: 2 m, 95 pF/m

R1-R5	HVA05FA100M	1%	3.5 kV, 0.5 W
C1-C5	CC45SL3JD100JYVNA	5%	6 kV
C6-C8	CK45-B3DD471KYNNA	10%	2 kV
GD1	2027-07-BLF	20%	75 V, 25 kA

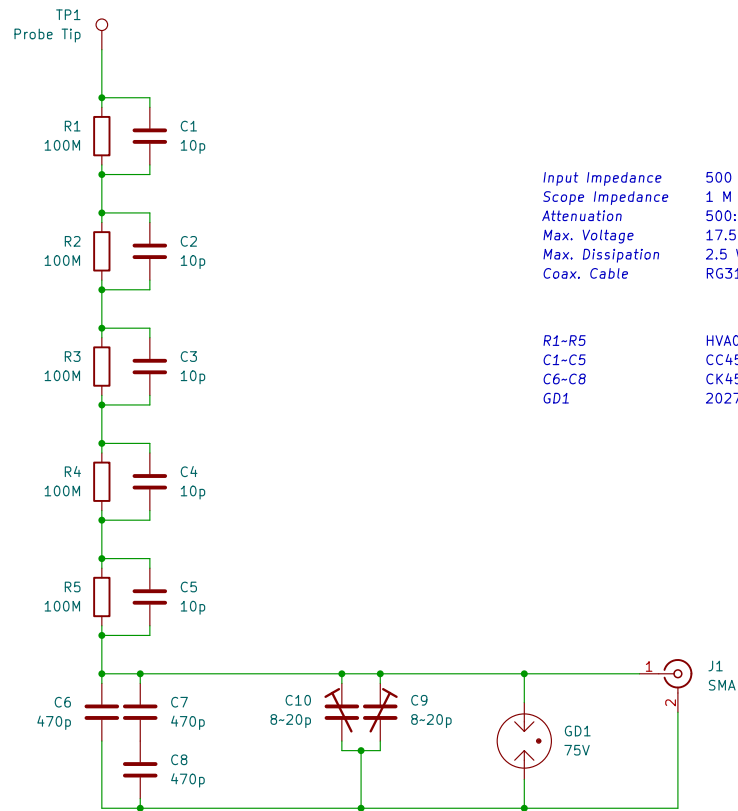

Alex Xia
Dawson HEP

Sheet: /
File: high_voltage_probe.kicad_sch

Title: High Voltage Probe

Size: A4 Date: 2026-03-19

KiCad E.D.A. 9.0.2

Rev: V1

Id: 1/1