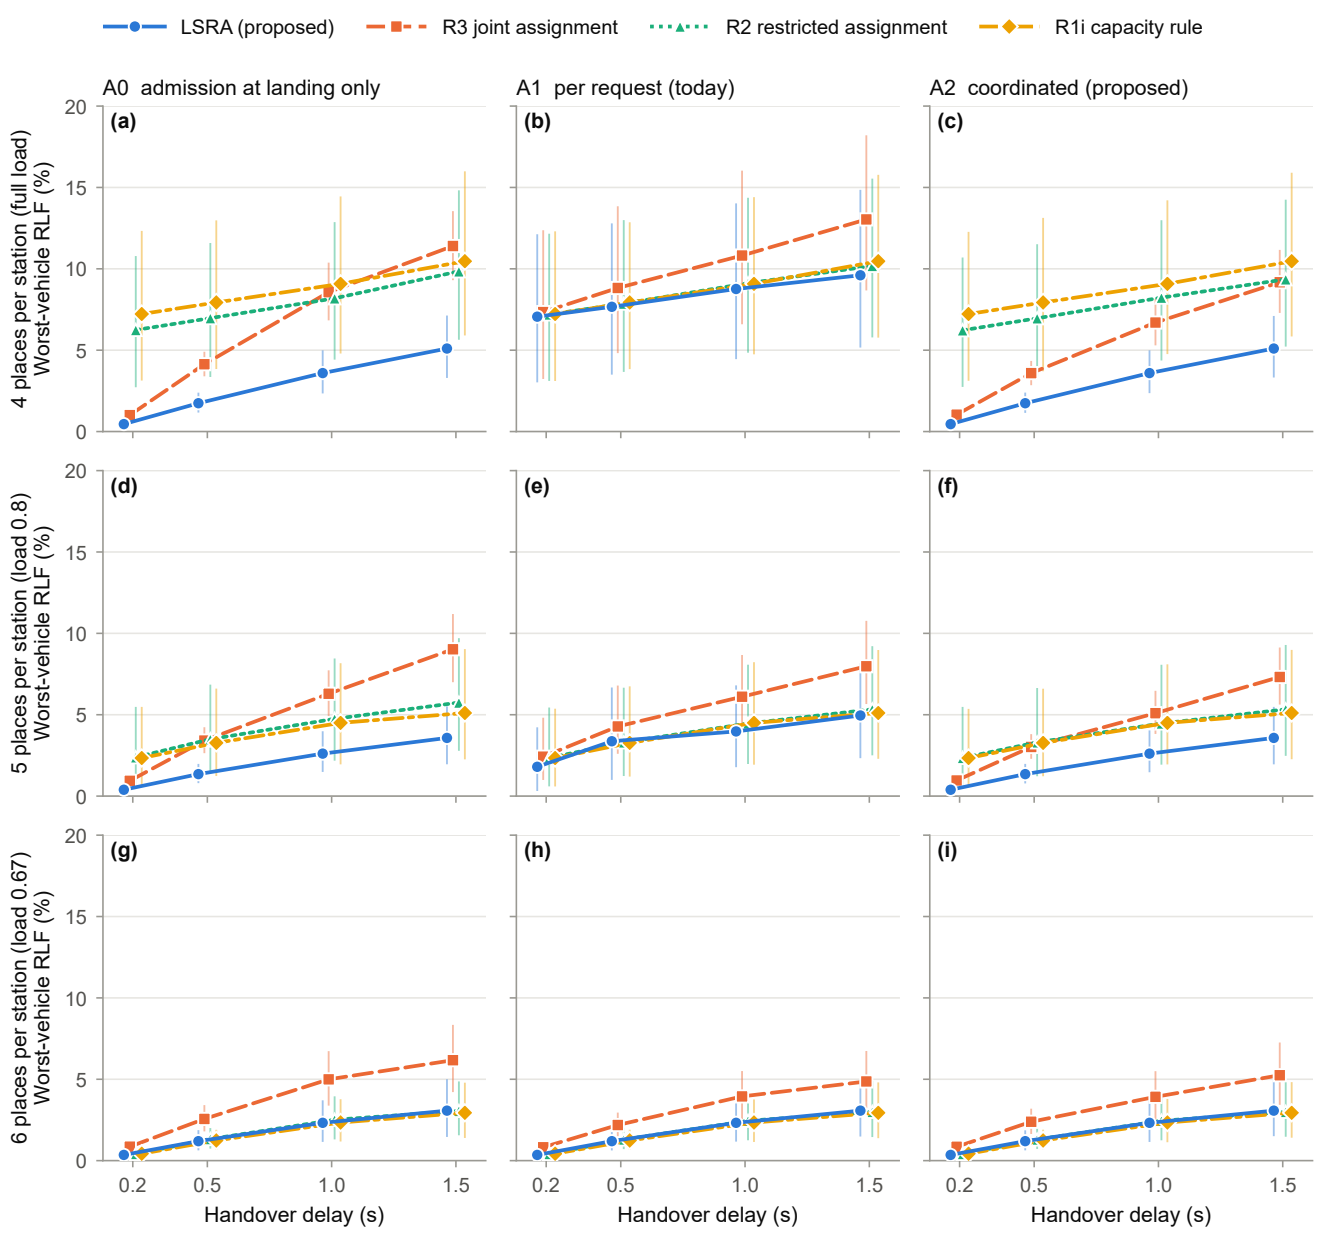

LSRA (proposed)
R3 joint assignment
R2 restricted assignment
R1i capacity rule
A0 admission at landing only
A1 per request (today)
A2 coordinated (proposed)
(a)
(b)
(c)
(d)
(e)
(f)
(g)
(h)
(i)
4 places per station (full load)
Worst-vehicle RLF (%)
5 places per station (load 0.8)
Worst-vehicle RLF (%)
6 places per station (load 0.67)
Worst-vehicle RLF (%)
0
5
10
15
20
0.2
0.5
1.0
1.5
Handover delay (s)