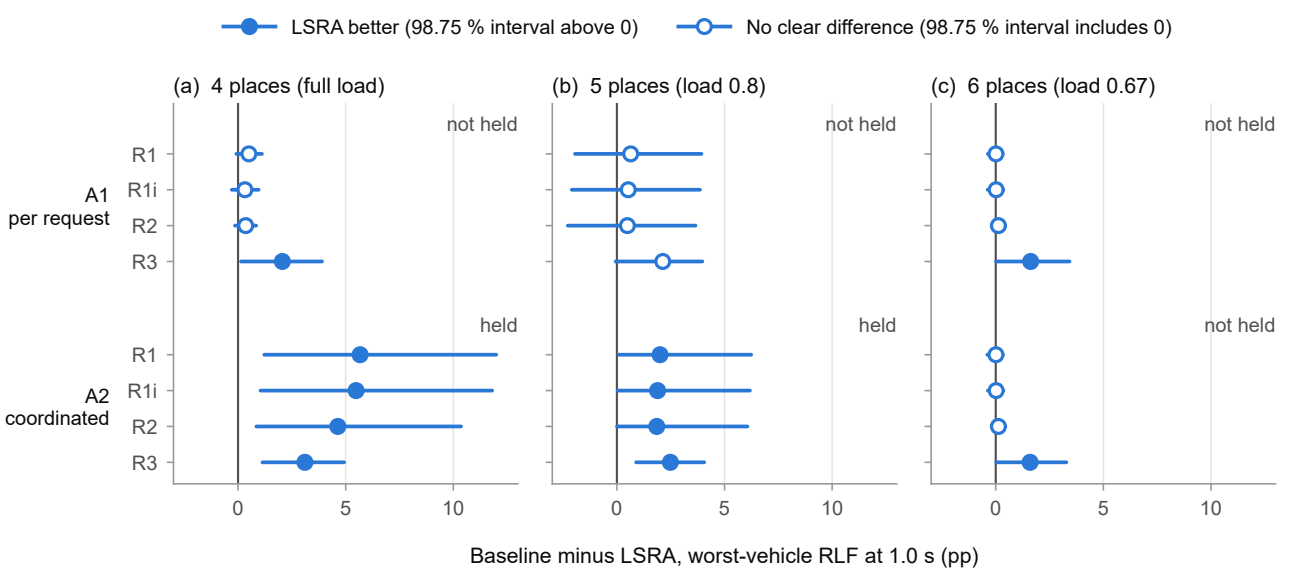
LSRA better (98.75 % interval above 0)
No clear difference (98.75 % interval includes 0)
(a) 4 places (full load)
(b) 5 places (load 0.8)
(c) 6 places (load 0.67)
not held
held
A1
per request
A2
coordinated
R1
R1i
R2
R3
0
5
10
Baseline minus LSRA, worst-vehicle RLF at 1.0 s (pp)