

# Engineering and Design Journal

FTC TEAM 4278 DE.EVOLUTION

## Abstract

FTC Team 4278 proposes the creation of a robot to address all aspects of the FTC 2013-14 competition, "Block Party." The proposed design has the capacity to address, in the teleoperated period: (1) retrieval of blocks; (2) placement of blocks into the block crates; (3) raising the FTC flag; (4) hanging against the field bar. In addition, during the autonomous period, the robot will address the following elements: (1) placement of blocks in the correct bin, as indicated by an IR beacon; (2) maneuvering to the ramp.

In order to achieve these goals, it was determined that the robot should: (1) be very difficult to push; (2) be fast and reliable in movement; (3) have a low center of gravity; (4) have as few unique components as possible; (5) be as compact as possible; (6) pick up blocks with at most one motion; (7) place blocks in crates with at most one motion; (8) hang with at most either two motions on an existing component, or one motion on a new component; (9) be able to raise the flag with one component; (10) be electrically stable, generating as little static as possible.

Goals set for autonomous include: (1) being able to score in the crate denoted by the IR beacon; (2) being able to travel to the nearest ramp; (3) being able to address and recover from any problems which may arise on the field, including, but not limited to, obstructions caused by other robots; (4) potentially being able to score both autonomous blocks. For (3), the intent is to travel onto the ramp regardless of potential obstruction by other robots. Decision logic is used to avoid obstructions.

Over the course of this engineering document, we address these problems, determine how we solve them, and explain the process which lead to these conclusions. Most notably, the development of a prototype robot allowed us to identify critical problems with our design and address them before implementation.

Additionally, the code which goes into this design will be explained.

# Contents

<b>1</b>	<b>Robot Design and History Overview</b>	<b>3</b>
1.1	General Structure and Design . . . . .	4
1.2	Considerations for Support, Structure, and Placement . . . . .	5
1.3	Wheelbase and Arm Design . . . . .	6
1.4	TODO: Gear Ratios and Mathematics . . . . .	7
1.5	TODO: Solidworks and CAD Modeling . . . . .	8
1.6	TODO: Final Design Overview . . . . .	9
<b>2</b>	<b>Meetings and Proceedings</b>	<b>10</b>
2.1	Preseason Overview – Meeting 1: 2013-08-31 . . . . .	10
2.2	Initial Design – Meeting 2: 2013-09-07 . . . . .	11
2.3	General Design – Meeting 3: 2013-09-14 . . . . .	12
2.4	Initial Field Build – Meeting 4: 2013-09-21 . . . . .	13
2.5	First Prototype – Meeting 5: 2013-09-28 . . . . .	14
2.6	Flag Spinner Initial Test – Meeting 6: 2013-10-6 . . . . .	16
2.7	Block Aquisition Redesign – Meeting 7: 2013-10-11 . . . . .	17
2.8	Solidworks Redesign – Meeting 8: 2013-10-18 . . . . .	18
2.9	First Full Test and Match – Meeting 9: 2013-10-25 . . . . .	19
<b>3</b>	<b>Software Architecture and Implementation</b>	<b>20</b>
3.1	Teleoperated Mode . . . . .	20
3.1.1	Drive Code and Reasoning . . . . .	20
3.2	Autonomous Mode . . . . .	22
3.3	Algorithms and Cartesian Mathematics . . . . .	23
3.3.1	Hybrid Localization Using Gyroscopes & Odometers . . . . .	23
<b>4</b>	<b>TODO: Outreach</b>	<b>24</b>
4.1	TODO: Helping other teams online . . . . .	24
4.2	TODO: Anything else? . . . . .	24

# 1 Robot Design and History Overview

In this section, we detail each component of the robot, the design decisions that went into it, important and critical tests, and the general development of our design.

Over the past four years, our design strategy has changed significantly. We have gone through multiple paradigm shifts in our design process. Our first year, we simply threw ourselves at the problem and left the result to be decided. This worked wonderfully, but in retrospect, much of that was simply sheer luck. We struck the correct idea, and executed it effectively, but not to the best of our ability.

As a result, the second year, our effectiveness slumped slightly. Though we still won several awards for placing third in local competitions, we did not perform to our expected standard. The reasons for this are twofold: First, we failed to properly conceptualize what it is we intended to do before making an attempt at execution. In this way, the robot's design suffered significantly from problems which could have been solved with some forethought. Secondly, we failed to properly test the components of the design before implementation. We threw parts together without accurately testing each one for validity, and refused to change the parts that did not work.

We drew many lessons from that year, and in our third year, we developed a full SolidWorks model of our design, and created a defined intent for our robot before building. We prototyped several components before implementing them. We did still run into issues, but they were not issues we could necessarily have predicted or foreseen over such a short timescale. All things considered, we created a highly effective robot, breaking the world record score, and scoring a maximum of over 300 points on the field by ourselves.

This year, we had to think a bit more rigorously about our design. We hearkened back to the 2011-2012 FTC Challenge, "Bowled Over!" during which we struggled to actually lift the balls off the ground. We recognized going into this year that pulling objects out of a dispenser is much easier to design and engineer around than lifting objects off the ground. However, in the usual spirit of our team, we wanted to do it all. When we set out to tackle this challenge, we decided we would find the IR beacon, move to the bridge, score tons of blocks, raise the flag, and hang our robot. We decided that the challenge was *doable*, and we would meet its challenge. This, below, is what we have done...

## 1.1 General Structure and Design

We decided very early on what the style of our robot’s design would be. We recognized that it is possible to determine some components’ effectiveness without actually having *designed* the other components necessarily.

We started with the frame structure. We decided there were a couple main approaches: we could either lift blocks straight off the ground, or drive into blocks and lift them up that way. One way supports a high, square frame with a tall clearance, and the other supports an “A-frame,” so called for its resemblance to a block-letter A. This would allow us to pick up blocks with the front of our robot, while still leaving plenty of room for electronics. We chose the A-frame over the square frame for sheer simplicity and potentially synergistic design with other components of the robot.

At this time, we had imagined the flag spinning motor on the front of the robot, an arm to manipulate blocks, and various motors and errata on the sides of the robot. While we have significantly changed the vision from its original form, it is still true to these aspects in particular. We have placed a flag spinner on the front of our frame, we have an arm to manipulate blocks, and the gears are stored in the side panels.

As optimal as we may have decided the A-frame to be, there were a few considerations to think carefully about before actual implementation. These were lessons we learned from “Bowled Over!”. The first topic we needed to consider was stability. When we designed the frame for the challenge two years ago, we paid very little attention to stability. As a result, the weight we placed on the center of the robot caused it to cave in where it should not have. The front wheels warped inward, and the electronics came loose under tension. Additionally, the multi-segment arm had pressure in places it was not designed to support. We will reveal how we addressed this later in this section.

## 1.2 Considerations for Support, Structure, and Placement

We needed to make particular consideration for structure and weight distribution on the final design, as we had chosen a type of frame which becomes unstable if not properly constructed. We decided very early on that we would construct the robot mostly from raw materials, so the first consideration was of material. We were presented with several options, nobody on the team questioned the choice of delrin as the appropriate material.

**Material Selection** Delrin was chosen primarily for its strength and resilience. It is an easy material to lathe and cut, both by laser and hand, and it does not damage easily. It is very strong in thick directions, and is also relatively lightweight. Tetrix aluminum frame pieces are far, far too flexible and pliable, and become warped or damaged easily during competition. Delrin does not often even so much as scratch.

Even so, we could not depend on delrin entirely. After some consideration to structure, we decided that the easiest way to prevent the side panels from caving in was to both make them thicker and support them against each other. We decided that the wheels and gears could go in between two panels, which would be spaced for stability. These would act as our gear boxes. Additionally, the two gearbox panels would be supported by the entire middle section of the robot, which would prevent them from caving in. We decided support bars would be needed across the center of the robot. This, we decided, is doable.

Standoffs were used to support the two panels of the gearboxes.

**Center of Gravity** Some consideration had to be given to center of gravity. In deciding we wanted to use an arm, we effectively filled most of the robot with air. This made the center of gravity incredibly critical. It needed to be very low and centered, so that we could not possibly be pushed over by another robot. This meant that the motors powering the arm and wheelbase could not be placed adjacent to their respective components.

To demonstrate this, consider the placement of the motors. Place the front drive motors in the front of the robot, the arm motors up by the arm, and suddenly the weight distribution becomes horribly imbalanced. As a result, we decided to place the motors directly next to the electronics in front of the robot. The center of gravity is thus centered along the width of our robot, and sufficiently low to enable difficult tipping. We have encountered a slight problem, where the center of gravity is too far forward, but this can either be corrected or may not be an issue. We have yet to see in competition, but preliminary, informal tests indicate this may not be an issue.

**Gear Strength** We have learned from past years that Tetrix axles are insufficient for high load. This is a result of two parts: first, their circular design makes them hard to lock into anything. Second, the locking pin/set screw, under high tension, actually cuts into the axle, both preventing movement of the attached part and preventing removal. The axles also rotate under moderate torque, as they are made of aluminum.

In order to alleviate this problem, we are using allowed hexagonal axles. These have several benefits. First, they are much thicker, and will not bend or twist. Second, objects that are locked into a hexagonal axle cannot rotate freely around the axle. Third, the hexagonal collars do not lock against the axle themselves, and as a result do not create an indentation in the axle past which nothing will move.

**Arm Support** We decided the arm needed to be strong enough to lift the robot. During the construction of the first prototype of the arm, we created a way for the arm to support the entire robot, but miscalculated the shearing strength of the wooden collars which locked the arm in place. As a result, the torque on the arm caused by gravity caused the wooden collars to strip internally. We have since replaced them with custom-built clamps, designed after hex wheel hubs. More on arm design to come.

### 1.3 Wheelbase and Arm Design

**Wheel selection** In selecting the wheels for our robot this year, we wanted to prioritize two things: maneuverability and traction. Wheel layout and selection is the entire deciding component in how these two motivations are balanced, and our wheel selection reflects this. We decided that our design model - block grabbing in front, dumping in back - necessitated finite control while aligning the back, but did not require such control in the front. We decided that the front needed to be able to turn quickly, and the back needed to turn precisely. These requirements fit the model of a “fish tail” drive perfectly.

A fish tail drive consists of two traction wheels and two omni wheels, mirrored horizontally across the robot. The traction wheels we used are called Colson wheels, and the omni wheels are standard Tetrix parts. We capitalized on the new lenience in wheel selection this year by selecting a wheel which is both smooth, large, and high friction. As a result, it is nearly impossible for another robot to push us sideways, and only possible to push us along the direction of rotation with compliance from the motors.

**Robot length** While one might normally consider this to be a small or trivial detail in robot design, this actually grew to high importance for us in our design deliberation. There are a couple reasons for this: first, fish tail drive is significantly impacted by the span of the wheels. Too short, and the robot does not turn well. Too long, and the front turns too quickly.

We have additional constraints on our length as well: we need to 1) be able to support a flag spinner in front of the robot

**Arm History: Roller**

**Arm Block Scoop**

## 1.4 TODO: Gear Ratios and Mathematics

## 1.5 TODO: Solidworks and CAD Modeling



## 1.6 TODO: Final Design Overview

## 2 Meetings and Proceedings

In this section, we detail exactly what happened at select meetings, whose events bear particular significance over the development of our robot.

### 2.1 Preseason Overview – Meeting 1: 2013-08-31

We held a preseason meeting in order to go over scheduling, recruitment of new members, and hold a quick review of what we learned from our last season. One of the main items we discussed was our scheduling, and as a team we decided to take an aggressive approach towards our first couple of regional competitions in order to secure a place in St. Louis. Because of this, we may need to cut back on scoring the maximum number of points and instead focus on scoring a high, yet consistent number of points. We found out that we need to secure our electronics and work with the field control issues that we were issues. We also plan on placing a much larger emphasis on the CAD design of our robot than we have in our two previous years as it is an efficient way to quickly discover and troubleshoot problems prior to building the system.

Our final goal is to have two weeks of drive practice before our first regional on December 14th, important for both driver and coaches, to figure out the timing of the game, as well as things that we can or cannot do in game. Organization of the team this year will be facilitated through the use of Google Groups, which will allow all the team members and their parents to be easily contacted for meetings, and will hopefully foster some discussion over build design or game strategy.

We also decided to meet a few hours after the game was released next week so team members could think about strategies ahead of time and add to the strategy discussion of our first meeting of the season. The meeting was fairly short, but got the team in the right mindset for the upcoming season, and got everyone excited for the new season!

## 2.2 Initial Design – Meeting 2: 2013-09-07

The team decided last week to meet a few hours after the game video and rules were released, so by the time our meeting started, everyone had an idea of how they thought the robot should work, and be built. Fortunately, most team members were on the same page and wanted to focus on scoring as many blocks into the baskets as possible, in a manner that would allow for a integration in the lifting and scoring mechanism. We decided to focus on every aspect of the game for our qualifiers, since it seems like we could consolidate all of the mechanisms into very few.

After a fairly long strategy discussion, some ideas were thrown around as to how to pick up and score the blocks, since we always have a difficult time getting our game pieces, and a rough idea of a mechanism was developed that would use a roller system and a block hopper that would pick up and score the blocks. There is still significant discussion considering the way we will go about constructing a lifting mechanism, with different arguments for and against a rotating arm and a more standard but perhaps less efficient forklift, similar to “Ring It Up!”. Some of our team members have some experience with constructing forklifts from prior FTC seasons, so we have some idea of what kind of issues we might come across with that kind of design. One thing we discussed was making sure we construct and purchase our materials with a little more regard for quality than we have in previous years, but we wanted to focus on simplicity this season as it worked out very well for us three years ago, and the ideas we are thinking of currently all seem to fit this idea.

Members of the team have assumed different jobs to complete before the next meeting, such as researching lifting mechanisms, getting a BOM for the field and purchasing the materials, and researching the specifications of an IR beacon and sensor, since the team also decided that scoring the block during autonomous is absolutely imperative to the outcome of this game. It is essentially free points that even a defensive robot cannot stop. As of right now we are choosing to focus the endgame period, since lifting and raising the flag are relatively simple tasks.

We are considering purchasing the AndyMark field, as it would provide us a standardized field and a better replication of the interaction of the robot with the field during competition.

## 2.3 General Design – Meeting 3: 2013-09-14

Today was our second main meeting; we discussed several different raising mechanisms, since we as a team have decided that it was the most important system of our robot.

Our main idea for lifting is an arm that is centered around the top corner. We are designing it to be just long enough to allow us to climb the bar as well as to clear the front block scooper. As for the material, we were looking at Delrin, and wood for our prototype. Delrin has incredible tensile strength. If a material is homogeneous then the tensile and flexural strengths are identical. However, most materials have defects in them which act to concentrate the stresses locally, which in turn cause a localized weakness. We have determined that the flexural strength is greater in the Delrin over the wood as follows. We first see that method for calculating flexural strength is:

$$\sigma = \frac{3FL}{2bd^2}$$

and we are looking to see which sheet can take in the maximum force,  $F$ . It directly follows that as we increase  $b$ , the width measured in in, and  $d$ , the thickness measured in in, the sheet can withstand a greater force. Elementary analysis allows us to see that the Delrin is superior than the wood. This will assure us that if our wood prototype works, so should our final design. It will also be able to withstand in competition.

For the flag spinner, we discussed using some external pins or some type of rubber-esque substance to push against the edge and raise it up. We believe that a rubber-esque material will work. We plan on using 3 NXT motors to provide enough torque and speed to raise the flag. Our goal is to raise the flag in under 5 seconds.

We also spent a lot of time discussing the importance of autonomous and the structure of our code. We are looking at dynamic autonomous programs that are able to dodge other robots if need be. We are looking forward to prototyping within the next several weeks. Our meetings have mainly comprised of theorizing about code and 3D modeling our robot. We are sharing with the younger students much of the knowledge we have learned over the years as well.

## 2.4 Initial Field Build – Meeting 4: 2013-09-21

Today we began building the field, discussed the lifting, got mail, worked on autonomous theory, cut PVC with safety glasses, and had some fun moving our very mobile robot for a while. In the mail we received one half of the blocks necessary for the field. For building we:

1. Painted the wood
2. Cut all the pvc pipes for the flag spinner
3. Wore safety glasses
4. Cleaned up a lot of pvc dust
5. Screwed temporary screws to the flanges onto the wood

Flag Spinner:

- Involves NXT motors
- Gearing 6:1
- Rubber-esque material did not work out
- Using extruding pins

## 2.5 First Prototype – Meeting 5: 2013-09-28

Today was a day for laying out drawings, finalizing designs, and testing some of the flag spinner prototypes.

We started the day with the usual bit of socialization, before returning to work. The primary topic of discussion is the acquisition mechanism for the blocks. It has been speculated up until this point that we are going to be using a roller, and it looks like those plans may come to fruition. We received several items today, including some Tetrix motors, as well as M3 screws and the other half of the blocks.

A to-scale side view drawing shows that the arm we want to design and guiding channels will take up about 7 inches on either side, leaving 8 inches in the middle to mount the block grabbing mechanism on. This fits within our expectations.

It is worth noting that since we are designing the robot out of raw materials we are using metric, as opposed to the imperial u-channels, so there is some difficulty in lining up the holes if we plan to use any Tetrix. This is a prototype however, and the arm we plan to design for the final design would be out of delrin, and can be designed to fit our needs. The prototype wooden arm also has potential tolerance issues. There is about a 1 block tolerance on the size of the spinning blocks. Stability is key.

We constructed our first prototype, we assembled the outside arms from plywood. From left to right, there are two arm chasis pieces, the arm pieces and then two arm chasis pieces. The frame design is an A-frame and it works pretty well.

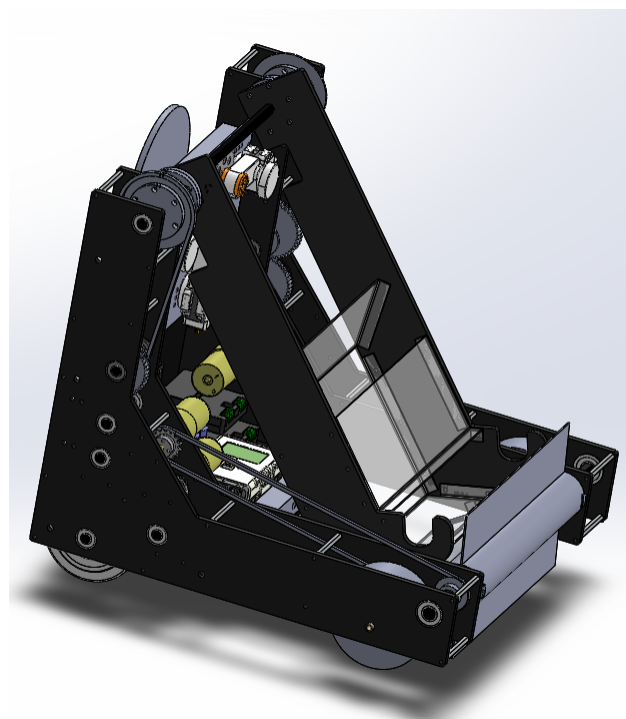


Figure 1: This is the first revision of our Solidworks. We can see the block acquisition device that is essentially a roller that will inhale blocks into our robot

Force is not an issue, and remains at a 16:1 ratio with torque gained. It is important to note that the force DOES double when an additional layer is added, however, with the 16:1 ratio between the movement of the bars, the speed with which the bars are raised ALSO doubles. This means that, though the force doubles, the speed at which the arm go up is also doubled. That implies that any torque issue created by

adding another layer to the mechanism can be resolved by multiplying the gear ratio of the chain motor by two. The same vertical speed will be achieved. The prototype is very functional. We connected it to the (makeshift) motor, and ran it. The mechanism lifted very well. The following problems were noted:

- Block pickup does not work
- Lifting does not lock after power is lost
- The wooden shaft collars strip
- It does not move fast enough
- It makes the robot very back heavy

Possible solutions to these problems (in order) are:

- Switch from the roller
- Jam the gears
- Change the wood to metal
- Add steel to the front

Despite these issues, the lifting mechanism works well, and glides smoothly as long as they aren't stripped. Granted it is currently in prototype form, the final version (which will be produced much more carefully), should be very effective.


We are currently looking into redesigning the block pickup mechanism as it does not seem to be effective. We plan on lowering the roller to the ground and seeing what happens.

Currently, our projected maximum height is 32, just over what we need to hang on the bar.

## 2.6 Flag Spinner Initial Test – Meeting 6: 2013-10-6

Today's meeting was short - it was only two hours. We had a couple ideas we wanted to test, and the tests were successful. We verified our idea would work, and redrew the pictures from two days ago.

The idea we were testing today was whether or not we could raise the flag by using a rubber-like substance to mesh within it and spin. We soon saw that the NXT motors were not as powerful as we would like and the force that the rubber plate was inducing was off center. This makes it unfeasible to use.

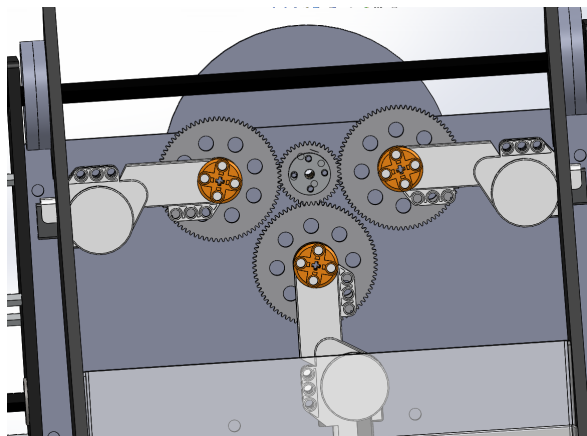

We plan on switching to the seemingly common extruded pins design. We plan on having two pins attached off center that are  $180^\circ$  apart. We also plan on switching to a Tetrix motor with a 6 : 1 gearing ratio. With this ratio, we will be able to raise the flag, theoretically, in under 10 seconds.

However, this method adds an extra 1.5" to our length. As we must stay within the 18" length constraint, we may have to shorten our roller (block pickup mechanism). This may become problematic, but as far as we can see we should be able to work around it.

For the pins, we had two ideas: the first is to use cut Tetrix axles. The second is to use longer Tetrix screws. We plan on using the Tetrix screws first to test and we may end up keeping them on afterwards.

We also did some more testing with the roller. We experimented with lowering it and shrinking the radius of the aluminum tube. We chose a smaller inner radius due to the fact that it would weigh less and it would be easier to place near the ground. We are still running into issues of picking up much more than 4 blocks at a time.

We decided on mounting it 1.5" above the ground because this is just enough to let the blocks slide under as we roll.

It is the popular idea that we want to completely redesign the block grabbing mechanism due to its inability to give us the accuracy and visibility that we want. Visibility is an issue when we go to the opposite side of the field.



## 2.7 Block Aquisition Redesign – Meeting 7: 2013-10-11

We have spent a lot of time working on scoring blocks, but we overlooked the difficulty of acquiring them. We decided to spend the day looking over our acquisition device as we found it was not very effective. We are looking into changing the roller into a much lower roller made of rubber. We are also looking into changing the entire design altogether. The main ideas consist of driving into blocks and then flipping them into our arm. However, many members of the team do not like the idea of multiple moving parts.

We decided to extend the final aspect of the roller and found that it was completely ineffective. There is currently no member that continuously supports this idea.

Today, Garrison proposed that we use a bulldozer like system. A flat plate that we would use to ram into the blocks. Essentially extending our arm to be outside of the frame. We built a first prototype with this and it seems to show some promise. We are still unsure of the implications that this has for the a final working idea.

Another issue we see with this mechanism is that it is very easy for blocks to slip outside of our robot.

We currently plan to go home and think about better ideas. We will probably have an in-depth Skype conversation over this idea. We look forward to improving this design as it needs a lot of work.

The flag spinner was also entirely redesigned as follows:

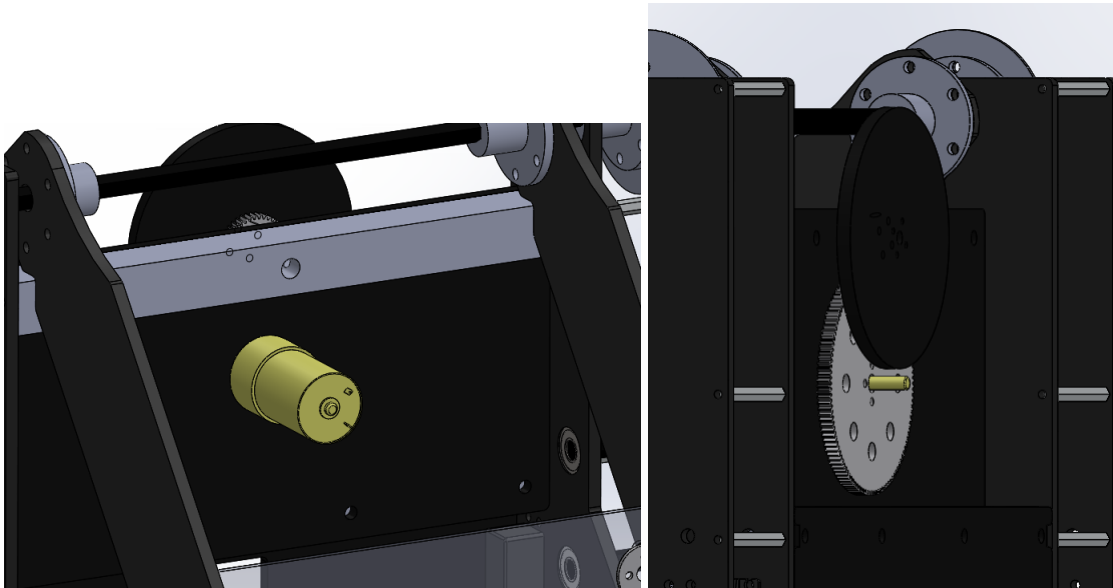


Figure 2: Here we can see both sides of the new, redesigned, flag spinner. The notable changes include the switch to the Tetrrix motor and the removal of the rubber backing in turn for extruding pins (not shown above).

## 2.8 Solidworks Redesign – Meeting 8: 2013-10-18

After coming back with new ideas, we spent the first hour of our meeting discussing the pros and cons of our new block acquisition mechanism. We all feel that a flat sheet on the ground that we can use to run into the blocks as a bulldozer is the optimal solution.

We are designing it to be fully flush with the ground. We look forward to testing this out. In solidworks we are redesigning the base of the robot to be shorter to allow the bulldozer system to lie in front.

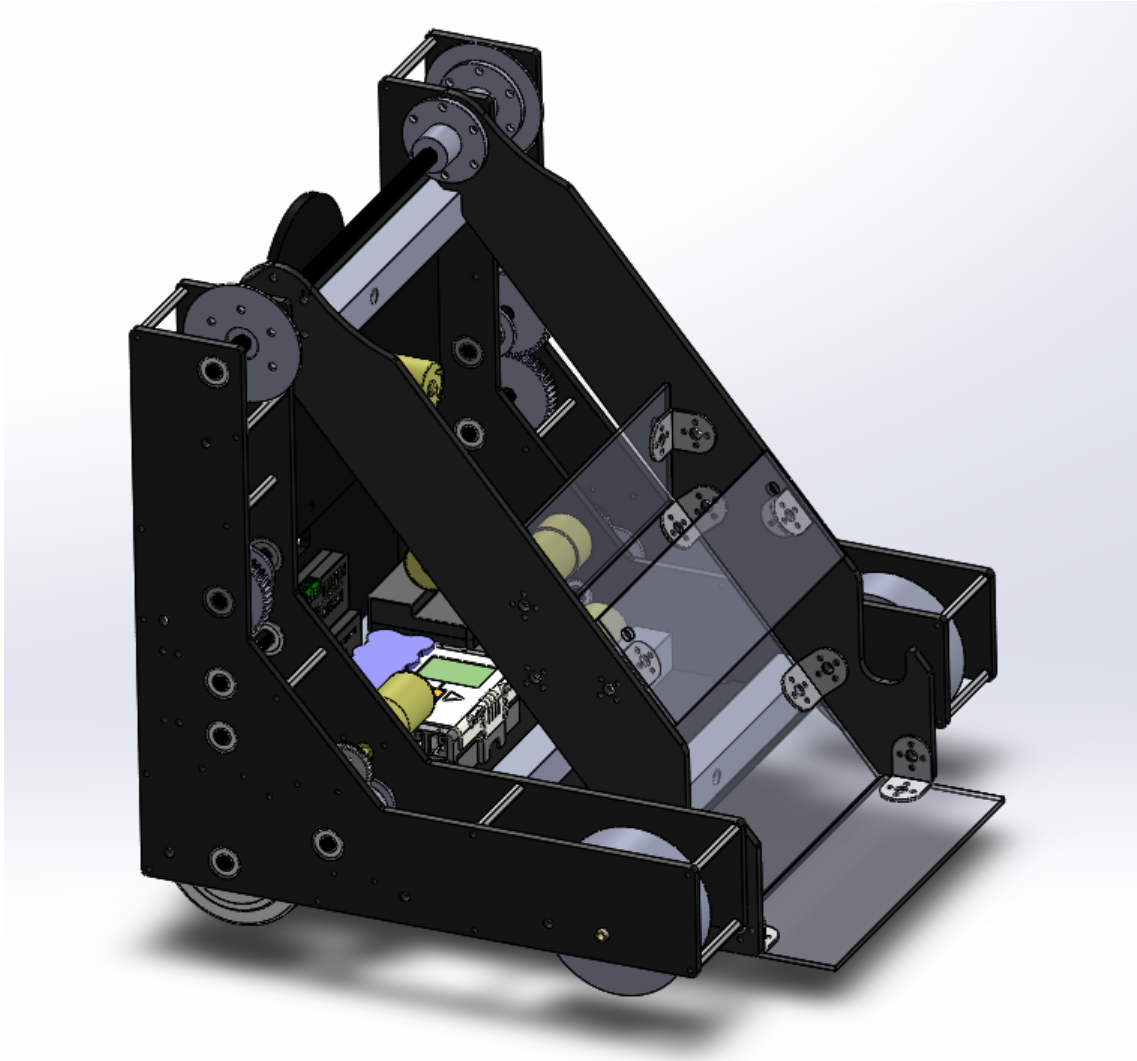


Figure 3: This is the second revision of our Solidworks which includes the redesigned block acquisition device.

## 2.9 First Full Test and Match – Meeting 9: 2013-10-25

Today was our first day having a fully complete robot. Although we had done several tests of our prototype before, this was the first day we had everything working together. The excitement within our team was immense. We tested our drive train with the added weight of the arm on the motor. We tied the flag mechanism with nylon as our kevlar rope has not yet been received. The kevlar provides less friction and is more like the competition.

Near the bottom, we have a lot of empty space to place the electronics. We hope to use the HiTechnic SuperPro this year to do much more sensor fusion. We want to add an Arduino or Atmel processor (ATUC3b0128) to do much more powerful computation without having to deal with the timing issues that are imposed by using the task system in RobotC and the slow clock of the NXT. We have plans to include gyroscopes, accelerometers and ultrasonic sensors. We are also looking into developing our own infrared seeker, although we are still uncertain about the feasibility of that task.

With the A-frame design that we have we are able to distribute all of our weight to the back of the robot. This makes it very stable and very difficult to push us.

When we scored our first block, the entire team was ecstatic. We all felt relief that we were able to lift something and score our blocks. We were somewhat surprised as to how simple it was for us to score a block. It went on just by driving backwards and raising the arm.

The arm went up very smoothly and we had no issues scoring on any of the blocks. We decided to play our first match to see how many points we were able to score.

We gave Tristan the controller and on our first run we were able to score about 200 points. We scored only on the outside baskets. This added up to the balanced bonus bonuses. Overall, we are very happy with the current design of the robot. Although, we do feel that a lot of driver practice is needed, along with an improved block acquisition device.

Once we had the entire robot built we started testing the arm mechanism and it's ability to remove and score blocks. We found that although it is just in and out straight, moving linearly. We also found that it requires almost no effort to manipulate.

Tristan, our driver, says that with the new Fishtail drive train that we incorporated along with the ease of use of scoring rings and removing them from the ground. We are still unable to consistently pickup 4 blocks.

There is an air of reminiscence from our first year of FTC. We feel that our strategy and simplicity of our mechanism is very similar. This brings back memories to the members who were on the team from the conception of the team. This also brings an air of confidence among the members about the ability of our robot.

Now there is a lot of talk among the team members about autonomous and strategies for approaching it. We have the ability to determine which column the Infrared beacon is one within one second of our robot starting up.

After we scored our first block and played our first game we decided that we had accomplished a decent amount for this extra Sunday meeting and decided to call it a day. We have high hopes for the competition and expect to place well at our first qualifier.

## 3 Software Architecture and Implementation

Detailed in this section is the method and reason to our software architecture. In particular, we aimed for our architecture to be stateless with respect to the current operation, to maximize efficiency of joystick checks (which are normally slow in RobotC), and to allow dynamic and easy reassignment of both controller information during teleop, as well as both movement sequencing and heuristic decision trees during autonomous.

We have chosen a particular structure for our code. We have rewritten `JoystickDriver.c` to better express our needs. By removing superfluous tasks from the driver, we maintained functionality while increasing our efficiency by approximately threefold. We have created a set of utility headers: `teleoputils.h`, `autoutils.h`, and `sharedutils.h` to address the need for macros, `#define` statements, and standardized functions. Both `teleoputils.h` and `autoutils.h` import `sharedutils.h`, so that file is never explicitly included in the main code body. Drivers were pulled from HiTechnic’s online library for 3rd party sensors.

### 3.1 Teleoperated Mode

Teleoperated mode has the following requirements:

1. Smooth arcade driving
2. Easy reassignment of buttons
3. Stateless control of motors and robot state
4. Efficient button control and loop checking
5. **Must** use only one controller

In order to implement this effectively, we have implemented several macros. These macros allow us to later set the powers of the motors without much effort.

#### 3.1.1 Drive Code and Reasoning

Our main body of code is run through the following:

---

```
task main() {
    while(true) {
        getJoystickSettings(joystick);
        checkJoystickButtons();
        setLeftMotors(powsc1(JOY_Y1)-powsc1(JOY_X1)/1.75);
        setRightMotors(powsc1(JOY_Y1)+powsc1(JOY_X1)/1.75);
    }
}
```

---

First, grab the current joystick configuration from the controllers. Then, check to see if any buttons have changed (`checkJoystickButtons()`). Then, set the motor powers for arcade drive.

**Power scaling** The `powsc1(int)` function’s definition is intended to compensate for the large deadband range which occurs under standard drive conditions. The controller’s user really only needs two ranges: a high-precision, low power range near zero, and a low-precision, high power range near the maxima. While an exponential function could be used, it is much slower, and much more hard to tune. Instead, we draw two lines: a shallow slope for the first segment, then a large slope for the second segment of the controller. This provides both high precision and high power where needed. As the driver does not generally use the range in [60, 85]%, there is no concern about the nonlinearity. The function is defined as follows:

---

```

float powsc1(int xz) {
    float sign = (float)sgn(xz);
    float x = abs(xz)/128.0;
    if(x < DISTA)
        return 100* sign * (x*SLOPE);
    else
        return 100* sign * ((DISTA*SLOPE*(x-1.0) - x + DISTA) / (DISTA - 1.0));
}

```

---

**Compensation for the Old and New Joystick Configuration** It is necessary to compensate for both the old and new controller configurations. As the controller has been updated, the buttons have changed - however, competition rules permit the use of both controllers. Therefore, we must be able to accomodate this change if necessary. We have done so through the use of a define statement: if we have `#define ALTLOG`, then we switch to the old button layout.

**Button Press Checking Requires a Stateless Organization** In order to easily and effectively change the functionality of the controller, a particular design was implemented:

---

```

void invokeButton(int button, bool pressed) {
    switch(button) {
        case JOY_X: if(pressed) {servo[servoL1] = 156; servo[servoL2] = 26;}
                     else {} break;
        case JOY_Y: if(pressed) {servo[servoL1] = 120; servo[servoL2] = 40;}
                     else {} break;
        case JOY_A: if(pressed) {} else {} break;
        case JOY_B: if(pressed) {motor[mSpin] = 100;} else {motor[mSpin] = 0;}
                     break;
        case JOY_RB: if(pressed) {setArmMotors(100);} else {setArmMotors(0);}
                     break;
        case JOY_LB: if(pressed) {setArmMotors(-100);} else {setArmMotors(0);}
                     break;
        case JOY_R3: if(pressed) {} else {} break;
        case JOY_L3: if(pressed) {} else {} break;
    }
}

bool t[8];
void checkJoystickButtons() {
    for(int i = 0; i < 8; i++) {
        if(joy1Btn(i) != t[i]) {
            invokeButton(i, !t[i]);
            t[i] = !t[i];
        }
    }
}

```

---

This may appear confusing at first, however, there are a couple points: `checkJoystickButtons()` is actually called from the main loop. It simply checks to see what buttons have changed on the controller, and calls the appropriate `invokeButton(int, bool)` arguments. In doing so, we can determine exact behavior on button presses with ease. As our robot is very simple, we do not need more than a handful of buttons, so most of them remain unassigned.

## 3.2 Autonomous Mode

### 3.3 Algorithms and Cartesian Mathematics

#### 3.3.1 Hybrid Localization Using Gyroscopes & Odometers

**Odometric Data** We begin by assigning the following constants:

$$D_{ot} = \frac{\text{Distance}}{\text{odometer tick}} = \pi(\text{wheel diameter})/(\text{ticks/revolution})$$

$$\theta_{ot} = \frac{\theta}{\text{odometer tick}} = \pi \left( \frac{\text{wheel diameter}}{\text{distance between wheels}} \right) / (\text{ticks/revolution})$$

We can calculate  $(x_{\text{enc}}, y_{\text{enc}}, \theta_{\text{enc}})$  from the odometer as follows:

$$\begin{aligned} dl &= l_{\text{enc}}^t - l_{\text{enc}}^{t-1} \\ dr &= r_{\text{enc}}^t - r_{\text{enc}}^{t-1} \\ dD &= \frac{1}{2}(dl + dr)D_{ot} \\ dx_{\text{enc}} &= dD \cos(\theta_{\text{enc}}^t) \\ dy_{\text{enc}} &= dD \sin(\theta_{\text{enc}}^t) \\ d\theta_{\text{enc}} &= (dr - dl)\theta_{ot} \\ x_{\text{enc}} &= x_{\text{enc}}^{t-1} + dx_{\text{enc}} \\ y_{\text{enc}} &= y_{\text{enc}}^{t-1} + dy_{\text{enc}} \\ \theta_{\text{enc}} &= \theta_{\text{enc}}^{t-1} + d\theta_{\text{enc}} \end{aligned}$$

$l$  denotes the left side of the robot, and  $r$  denotes the right side of the robot.  $D$  denotes the distance.

**Localization Algorithm** The robots motor controller calculates position and orientation  $(x_{\text{enc}}, y_{\text{enc}}, \theta_{\text{enc}})$  from encoder ticks and sends the data to an on-board computer. The mounted gyroscope communicates with a gyro driver which integrates the rate values into an absolute angle  $(\theta_{\text{gyro}})$ . Global position  $(x_{\text{rbt}}, y_{\text{rbt}})$  is found by transforming the translation vector from encoder space to gyroscope space. Global angle  $(\theta_{\text{rbt}})$  is the gyro angle  $(\theta_{\text{gyro}})$ . The following describes the computation as an iterative algorithm:

$$\begin{aligned} dx &= x_{\text{enc}}^t - x_{\text{enc}}^{t-1} \\ dy &= y_{\text{enc}}^t - y_{\text{enc}}^{t-1} \\ d\theta &= \theta_{\text{gyro}}^t - \theta_{\text{enc}}^t \\ x_{\text{rbt}}^t &= x_{\text{rbt}}^{t-1} + \cos(d\theta)dx - \sin(d\theta)dy \\ y_{\text{rbt}}^t &= y_{\text{rbt}}^{t-1} + \sin(d\theta)dx + \cos(d\theta)dy \\ \theta_{\text{rbt}}^t &= \theta_{\text{gyro}}^t \end{aligned}$$

## 4 TODO: Outreach

4.1 TODO: Helping other teams online

4.2 TODO: Anything else?