

## Altair 8800 Simulator

- Power supply must be center-positive 7V-12V DC (typical usage 200-500mA, 1A max)
- Runs at about the same speed as the original
- Emulated memory size (RAM) is 64KB
- ALTAIR extended BASIC ROM (16k) can be mapped to addresses 0xC000-0xFFFF
- Emulates one ALTAIR 88-SIO, 88-ACR and 88-2SIO board. Each device can be mapped to the Arduino's serial interface (on the Due, they can be mapped to either Serial or Serial1). Data sent to each device can be captured and replayed.
- The ACR device also supports using the CSAVE/CLOAD commands in extended BASIC. When invoking CSAVE, the program will automatically be saved to a file specified by the file name in the CSAVE command. For CLOAD, all programs saved with CSAVE will automatically be played back until the program specified by the file name is found (or not).
- By default, both the 88-SIO and 88-2SIO boards are mapped to the Arduino's first Serial interface, configured to 115200 baud 8n1. That interface be accessed via pins 0/1 or the Arduino's USB cable (on the Due, make sure to connect the USB cable to the programming USB port, not the native port).
- Processes input/output on serial devices to deal with 8/7 bit output, upper-case input and backspace.
- Emulates 4 (can be configured to up to 16) Altair 88-DCDD disk drives
- Many settings can be modified via a configuration editor (invoke by holding STOP and raising AUX1)
- Above specs apply when running on an Arduino Due. The simulator can also work when running on an Arduino Mega 2560. In that case, it runs at about 25% original speed and has 6k emulated RAM. Disk drive emulation is not supported on the Mega.

## Front Panel

### Lights:

A15-A0	Shows the current address bus state (i.e. PC during normal operation)
D7-D0	Shows the current data bus state

### Switches:

SW15-SW0	Address/Data entry switches
RUN	Execute instructions starting at current PC location
STOP	Stop program execution
SINGLE STEP	Execute single instruction at current PC location and increment PC
EXAMINE	Set PC to address from SW15-0 and show content of that address on D7-0
EXAMINE NEXT	Increment PC and show content of that address on D7-0
DEPOSIT	Store value of D7-0 at current PC address
DEPOSIT NEXT	Increase PC by one and store value of D7-0 at that address
CLR	Stop serial capture/replay activated by AUX2 (see below) Holding CLR down during power-up will initialize memory and CPU registers to 0
RESET	Reset processor (set PC to 0)
PROTECT	Mark current memory page as write-protected (cannot be written to)
UNPROTECT	Remove write-protect status of current page
AUX1/AUX2	See detailed information below

## Auxiliary switch functions

### AUX1 down:

Function depends on current setting of SW7-0:

0...0000: Print this list to serial interface

0...0001: Calculator (David Hansel, 2015)

- Flipping SW15 (on->off or off->on) executes operation selected by SW14-13 between operand currently showing on A15-8 lights and operand selected by SW12-8 switches. Result is shown on A15-8 lights.
- Operations (SW14-13): 00=Add, 01=Subtract, 10=Multiply, 11=Divide

0...0010: Kill-the-bit (Dean McDaniel, 1975)

- Kill the rotating bit. If you miss the lit bit, another bit turns on leaving two bits to destroy.
- Quickly toggle the switch, don't leave the switch in the up position.
- Before starting, make sure all the switches are in the down position.

0...0011: Pong game using front panel (<http://altairclone.com/downloads/pong.pdf>)

- Left player quickly toggles SW15 to hit the "ball."
- Right player toggles SW8. Score is kept in memory locations 0x80 and 0x81 (left and right).
- Score is missed balls, so the lower number wins.

0...0100: Pong game using serial terminal (David Hansel, 2015)

- Needs terminal connected to serial interface. Terminal must understand escape sequences for cursor movement ("ESC-[")
- Left player uses A/Z keys (paddle up/down), right player uses K/M keys (paddle up/down)

0...0101: 4k Basic (Bill Gates, Paul Allen, Monte Davidoff 1975)

- SW11 down: I/O to SIO device, SW11 up: I/O to 2SIO device (either setting will work in default simulator configuration)
- Answering N to questions about SIN/RND/SQR slightly increases available BASIC memory

0...0110: MITS Programming System II

- SW11 down: I/O to SIO device, SW11 up: I/O to 2SIO device (either setting will work in default simulator configuration)
- Editor, Assembler and Debugger
- See intro at the end of this document, google for full documentation

0...0111: ALTAIR Turnkey Monitor

0...1000: Disk Drive Boot ROM (see *Disk Drive Support* section below)

0...1001: Music ("Daisy, Daisy...") (Steve Dompier, 1975)

- An AM radio held on top of Simulator, close to D0-D7 lights will pick up the song
- See: <http://www.digibarn.com/collections/weirdstuff/altair-sheetmusic/>

0...1010: 8080 CPU Diagnostic (Microcosm Associates, 1980)

- Basic test, takes about a second to finish
- Outputs to serial interface ("CPU IS OPERATIONAL")

0...1011: 8080 CPU Exerciser (Frank D. Cringle 1994, Ian Bartholomew 2009)

- Very thorough test that generates a CRC code for each group of tests.
- Outputs to serial interface.
- Full test takes about 4 hours. The "aluop <b,c,d,e,h,l,m,a>" section takes especially long

11xxxxxx: Save the 256-byte memory page currently selected on the SW15-8 switches to file #xxxxxx

10xxxxxx: Load the 256-byte memory page currently selected on the SW15-8 switches from file #xxxxxx

### AUX1 up:

If STOP is held up while AUX1 is raised, then invoke the configuration editor (see Configuration menu below). Otherwise:

- Maps ROM extended BASIC to addresses 0xC000-0xFFFF (until next RESET)
- Sets PC to 0xC000 and starts execution (i.e. starts BASIC)
- Before activating, set SW15-12 switches to  
0000: I/O goes to 2SIO device  
0010: I/O goes to SIO device  
(with setting will work in default simulator configuration)
- When asked MEMORY SIZE, just press enter.
- When asked LINEPRINTER, enter capital O and press enter
- Available memory for BASIC programs is 48101 bytes (~3000 bytes on Arduino Mega)
- CSAVE and CLOAD commands can be used to save/load programs to/from internal storage

### AUX2 down:

If SW12 is up, then mount disk in emulated disk drive (see *Disk Drive Support* section below).

Otherwise, play back captured data or example programs. SW15-13 select the device to which data is played back and SW8-0 select what data is being played back:

- SW15 down: Use the serial device which is mapped to the host serial output (primary) and has last seen input/output activity. In most cases this will automatically select the intended device.
- SW15 up: Use serial device selected on SW14-13:  
00: 88-SIO (port 0x00/0x01)  
01: 88-ACR (port 0x06/0x07) (audio cassette interface)  
10: 88-2SIO, serial 1 (port 0x10/0x11)  
11: 88-2SIO, serial 2 (port 0x12/0x13)
- SW8 down: Play back basic/assembly example # selected on switches SW7-0 (see below)
- SW8 up: Play back captured data in file # selected on switches SW7-0 (see below)

Loading BASIC/assembly examples:

- SW7 up: BASIC example, SW7 down assembly example
- If SW6-0 are all 0 then a list of available examples will be transmitted
- Set SW6-0 to the example number in the list and push AUX2 DOWN to transmit example
- Playback can be stopped by pushing CLR or by pushing AUX2 DOWN again

Playing back captured data:

- Play back data previously captured via AUX2 up
- The file number to be played back must be selected via SW7-0
- Playback can be stopped by pushing CLR or by pushing AUX2 DOWN again

## AUX2 up:

If SW12 is up, then unmount disk from disk drive (see *Disk Drive Support* section below).

Otherwise, capture data. SW15-13 select the device from which data is captured (same as SW15-13 settings in *AUX2 down* section above). SW7-0 specify the file number under which the captured data will be saved.

Capturing continues until AUX2 is again pressed UP.

Capturing serial data can be used to save a BASIC program in BASIC (note that in extended BASIC the CSAVE/CLOAD commands provide an easier way of doing this):

1. Set SW7-0 to the desired storage file number
2. Set SW15-13 to 000 (to automatically select capture device)
3. type "list" (but **not** ENTER)
4. activate AUX2 up to start capture
5. press ENTER
6. wait until listing is finished
7. activate AUX2 up again to finish capture

To later restore a program:

1. Set SW7-0 to a storage file number under which serial data has been captured before
2. Set SW15-13 to 000 (to automatically select replay device)
3. type "new" to clear the current program
4. activate "AUX2 down" to start replaying the captured data
5. Ignore the "SYNTAX ERROR" at the end  
(reported because the final "ok" of the "list" function was also captured)

Capturing cassette data can be used to save BASIC variable contents in Extended BASIC or saving programs from MITS Programming System II

1. Set SW7-0 to the desired storage file number
2. Set SW15-13 to 101 (to capture from ACR device on I/O address 6/7)
3. activate AUX2 up to start capture
4. enter CSAVE\*v [where v is the variable name that is supposed to be saved]
5. Repeat the previous step if more variables need to be saved
6. wait until listing is finished
7. activate AUX2 up again to finish capture

To later load the data:

1. Set SW7-0 to a storage file number under which cassette data has been captured before
2. Set SW15-13 to 101 (to replay to ACR device on I/O address 6/7)
3. Set SW8 to 1 (to select file replay, not BASIC example)
4. activate AUX2 down to start replaying the captured cassette data
5. enter CLOAD\*v [where v is the variable name that is to be loaded]
6. Repeat the previous step if more variables need to be loaded
7. Activate AUX2 down to stop replay

## Disk Drive Support

Disk drive support is optional and requires a SD card attached to the Arduino Due's SPI header (the 2-row, 6-pin header marked "SPI"). See the *Wiring SD card to Arduino DUE* section at the end of this document about how to physically hook up the card.

Disk drive support is **not** available in the Arduino Mega build, mainly for two reasons: 1. The SPI pins on the Mega are directly connected to some general I/O pins which are already used for the front panel and 2. The Mega only provides 6k of emulated RAM. Most disk based programs require more than that.

If you do not want to connect a SD card to the Due then you may want to change the `NUM_DRIVES` setting in `config.h` to 0. If `NUM_DRIVES` is greater than 0 then the Due spends about 1-2 seconds during startup looking for the SD card (it will continue normally but without drive support if no card is found).

If an SD card is detected, the following files are expected to be found in the root directory of the (FAT format) card:

- **DISKxx.DSK** (where xx is a 2-digit hexadecimal number): Disk images that the simulator can mount.
- **DISKDIR.TXT**: A text file whose contents will be sent to the serial connection (i.e. shown to the user) if front panel switches are set to 0001xxxx00000000 and the AUX2 switch is pressed down. This should contain information about each of the DISKxx.DSK files

To mount disks in the drive, use the AUX2 down switch:

- Set SW15-0 to: 0001nnnnDDDDDDDD where nnnn is a 4-bit number selecting the drive (i.e. drive 0-15) and DDDDDDDD is an 8-bit number selecting the disk number and press AUX2 down.
- The 8-bit disk number corresponds to the xx in the DISKxx.DSK files on the SD card.
- For example, setting SW15-0 to 0001 0010 0000101 and pressing AUX2 down will mount disk number 5 in drive 2.
- Selecting disk number 0 is a special case. If disk 0 is selected for mounting, it will not be mounted but instead the contents of the DISKDIR.TXT file will be sent to the serial output (i.e. shown to the user). Note that that means a file named DISK00.DSK can not be mounted.
- If a disk is already mounted in the drive the mounted disk will be unmounted before mounting the new disk
- If the disk file does not exist, it is like inserting an empty disk in the drive. If the operating system writes to the disk, the selected disk file will be created. So inserting a non-existent disk and then formatting that disk via the operating system (e.g. CP/M) will create a new empty disk.
- It is possible to mount the same disk in multiple drives. The simulator has no problem with that but the running operating system may get confused.

To unmount a disk from a drive, use the AUX2 up switch:

- Set SW15-0 to: 0001nnnnxxxxxxxx where nnnn is a 4-bit number selecting the drive (i.e. drive 0-15) and press AUX2 up.
- It is not necessary to unmount disks before turning off the computer. Each write operation to a disk gets flushed to the SD card immediately so turning the computer off with disks mounted will not lose data.

To run a bootable disk image, first mount the disk and then start the Disk Boot ROM:

- Set SW0-7 to 00001000 (to select Disk Boot ROM)
- Press AUX1 down
- This will install the Disk Boot ROM at 0xFF00 and immediately start it. If a bootable disk has been mounted it should automatically start now

## Configuration menu

The simulator configuration menu can be entered by holding STOP up and raising AUX1.

The following settings/actions are available:

- *Enable profiling*  
If enabled and the simulator is running (i.e. not in STOP mode) a message showing the current performance of the simulator is written to the (primary) serial output.
- *Enable throttling (Arduino Due only)*  
If enabled, the simulator performance is throttled such that it matches the performance of the original Altair.
- *Enable serial panel*  
Shows a simple representation of the front panel lights and switches on the (primary) serial output. Mostly useful when STANDALONE mode is enabled.
- *Enable serial input*  
When stopped, the simulator processes the inputs described in the “Debugging capabilities” section below.
- *Enable serial debug*  
Print processor status and disassembled opcode during single stepping
- *Clear memory on powerup*  
If enabled, the simulated memory will be cleared (set to 0) when the simulator starts up. Otherwise, memory content is random (as with the original).
- *Host Serial baud rate*  
Sets the baud rate for the Serial interface (pins 0/1 and USB serial on the Arduino)
- *Host Serial1 baud rate (Arduino Due only)*  
Sets the baud rate for the Serial1 interface (pins 18/19) on the Arduino
- *Primary host serial (Arduino Due only)*  
Selects which serial interface (Serial/Serial1) is used as the primary interface. All simulator related output (such as the configuration menu) is sent to the primary serial interface. Also, when auto-detecting the serial device for capturing/replaying data, only devices mapped to the primary serial interface are considered.
- *Configure SIO/ACR/2SIO-1/2SIO-2*  
See serial device configuration section below
- *Manage Filesystem*  
Starts file system manager (see File System Manager section below).
- *Apply host serial settings*  
When making changes to the host serial settings (baud rate, primary interface), those are not applied immediately. Select this option to apply the modified settings.
- *Clear memory*  
Clear the memory of the simulator (set all to 0)
- *Save configuration*  
Saves the configuration. Up to 256 different configurations can be saved. Configuration #0 is automatically loaded when the simulator starts.
- *Load configuration*  
Loads a saved configuration
- *Reset to defaults*  
Resets all settings to their default values. This can also be done by holding RESET up during power-up of the Simulator.

## Serial device configuration

The simulator emulates four serial devices connected to the Altair:

- 88-SIO card at port 0x00/0x01
- 88-ACR audio cassette interface at port 0x06/0x07
- 88-2SIO, card with serial 1 at port 0x10/0x11 and serial 2 at port 0x12/0x13

For each of these devices the following settings can be configured in the configuration menu:

- *Map to host interface*

Select to which host interface input/output of device gets directed.

When using Arduino Mega, there is only one host interface (Serial). When using the Due, there is the primary and secondary interface. The physical interface (Serial/Serial1) that the primary interface maps to can be picked on the main setup screen. The other one becomes the secondary interface.

- *Playback baud rate*

If interrupts are disabled for a serial device, the simulator just makes a new byte available for playback whenever the running program requests one. That way, playback runs as maximum speed without the program missing any characters. If interrupts are enabled however, the characters must be sent at a rate that gives the running program a chance to keep up. This setting selects the baud rate at which the playback sends the data. Note that on the Mega (since it is running at 25% original speed) you may have to go as low as 110 baud.

- *Example playback NULs*

When playing back data to the running program (e.g. the AM2 assembler), the program may need some extra processing time after a carriage return to process the previous line. This is done (as it would have been on the original) by sending a number of NUL (0) bytes after a carriage return. Note that this setting only affects the case when playing back examples stored in the simulator, not for captured data being played back. For captured data, make sure to set the program from which you are capturing to produce the proper number of NULs.

- *Use 7 bits*

Some Altair programs (e.g. 4k BASIC) use the 8<sup>th</sup> bit of a character to signal end-of-string, assuming that the output device only uses 7 bits. If this is the case, then the last character of any string will appear mangled in the output. If this option is enabled, the simulator will always clear the 8<sup>th</sup> bit before sending it to the serial output.

If the option is set to “autodetect”, the s will detect (for some known programs) based on the memory location of the “OUT” instruction whether the bit needs to be cleared or not.

- *Serial input uppercase*

Some Altair programs (e.g. 4k BASIC) only display uppercase characters and expect all input to be uppercase characters. If this option is enabled, the simulator will translate any incoming lower-case character to upper-case.

If the option is set to “autodetect”, the simulator will detect (for some known programs) based on the memory location of the “IN” instruction whether the translation is required.

Translate Backspace to \_

Some Altair programs (e.g. 4k BASIC) use \_ as backspace. If this option is enabled, the simulator will automatically translate an incoming backspace to \_ and an outgoing \_ to backspace.

If the option is set to “autodetect”, the simulator will detect (for some known programs) based on the memory location of the “IN” and “OUT” instructions whether the translation is required.

- *Enable CLOAD/CSAVE traps (for ACR device only)*

If this option is enabled then the simulator will catch BASIC CLOAD/CSAVE calls and automatically save/load to the internal simulator storage, avoiding the need to manually start cassette capture/replay.

## File system manager

The emulator includes a very simple mini file system to store the different types of data that can be saved/captured. The file system manager can be invoked by selecting (M) in the configuration menu.

The file system manager supports the following commands:

- **F:** Format file system (erases all files)
- **d:** Delete a file from the file system
- **r:** Read a file and show contents on screen

## Debugging capabilities

During reset:

SW7 on	Print processor status and disassembled opcode serial during single-stepping
SW6 on	Print status of control panel to serial during single-stepping
SW5 on	read (single-character) debugging inputs from serial

When stopped, the following keys have a function (if debugging inputs were enabled via SW5):

0-9,a-f	Toggle SW0-15 (only if stand-alone mode enabled in setup.h)
/	Prompt for value to set SW0-15 (only if stand-alone mode enabled in setup.h)
r	Run
o	Stop
t	Step
R	Reset
!	Hard reset (STOP+RESET)
X/x	Examine/examine next
P/p	Deposit/deposit next
U	AUX1 up
u	AUX1 down
s	AUX2 up
l	AUX2 down
Q	Protect
q	Unprotect
B	Add breakpoint (only if breakpoints enabled in setup.h)
V	Delete last breakpoint
D	Disassemble (will prompt for start address, space bar continues, any other key exits)
M	Dump memory (will prompt for start address, space bar continues, any other key exits)
n	change number system (hexadecimal/octal/decimal)
C	Enter configuration menu
L	Load a program from serial
	First value is start address, second value is length, followed by data bytes (all values separated by spaces). Can be used to load a program via the terminal.



## 8080 Instruction set

### Conventions in instruction source:

D = Destination register (8 bit)  
S = Source register (8 bit)  
RP = Register pair (16 bit)  
# = 8 or 16 bit immediate operand  
a = 16 bit Memory address  
p = 8 bit port address  
ccc = Conditional

### Conventions in instruction encoding:

db = Data byte (8 bit)  
lb = Low byte of 16 bit value  
hb = High byte of 16 bit value  
pa = Port address (8 bit)

### Dest and Source reg fields:

111=A (Accumulator)  
000=B  
001=C  
010=D  
011=E  
100=H  
101=L  
110=M (Memory reference through address in H:L)

### Register pair 'RP' fields:

00=BC (B:C as 16 bit register)  
01=DE (D:E as 16 bit register)  
10=HL (H:L as 16 bit register)  
11=SP (Stack pointer, refers to PSW (FLAGS:A) for PUSH/POP)

### Condition code 'CCC' fields: (FLAGS: S Z x A x P x C)

000=NZ (Zero flag not set)  
001=Z (Zero flag set)  
010=NC (Carry flag not set)  
011=C (Carry flag set)  
100=PO (Parity flag not set - ODD)  
101=PE (Parity flag set - EVEN)  
110=P (Sign flag not set - POSITIVE)  
111=M (Sign flag set - MINUS)

Inst	Encoding	Flags	Description
ACI #	11001110 db	ZSCPA	Add immediate to A with carry*
ADC S	10001SSS	ZSCPA	Add register to A with carry
ADD S	10000SSS	ZSPCA	Add register to A
ADI #	11000110 db	ZSCPA	Add immediate to A
ANA S	10100SSS	ZSCPA	AND register with A
ANI #	11100110 db	ZSPCA	AND immediate with A
CALL a	11001101 1b hb	-	Unconditional subroutine call
Cccc a	11CCC100 1b hb	-	Conditional subroutine call
CMA	00101111	-	Complement A
CMC	00111111	C	Complement Carry flag
CMP S	10111SSS	ZSPCA	Compare register with A
CPI #	11111110	ZSPCA	Compare immediate with A
DAA	00100111	ZSPCA	Decimal Adjust accumulator
DAD RP	00RP1001	C	Add register pair to HL (16 bit add)*
DCR D	00DDD101	ZSPA	Decrement register*
DCX RP	00RP1011	-	Decrement register pair
DI	11110011	-	Disable interrupts
EI	11111011	-	Enable interrupts
HLT	01110110	-	Halt processor
IN p	11011011 pa	-	Read input port into A
INR D	00DDD100	ZSPA	Increment register
INX RP	00RP0011	-	Increment register pair
Jccc a	11CCC010 1b hb	-	Conditional jump*
JMP a	11000011 1b hb	-	Unconditional jump*
LDA a	00111010 1b hb	-	Load A from memory
LDAX RP	00RP1010 *1	-	Load indirect through BC or DE
LHLD a	00101010 1b hb	-	Load H:L from memory*
LXI RP,#	00RP0001 1b hb	-	Load register pair immediate*
MOV D,S	01DDDSSS	-	Move register to register*
MVI D,#	00DDD110 db	-	Move immediate to register*
NOP	00000000	-	No operation
ORA S	10110SSS	ZSPCA	OR register with A
ORI #	11110110	ZSPCA	OR immediate with A
OUT p	11010011 pa	-	Write A to output port
PCHL	11101001	-	Jump to address in H:L
POP RP	11RP0001 *2	*2	Pop register pair from the stack
PUSH RP	11RP101 *2	-	Push register pair on the stack
RAL	00010111	C	Rotate A left through carry*
RAR	00011111	C	Rotate A right through carry
Rccc	11CCC000	-	Conditional return from subroutine
RET	11001001	-	Unconditional return from subroutine
RLC	00000111	C	Rotate A left
RRC	00001111	C	Rotate A right
RST n	11NNN111	-	Restart (Call n*8)
SBB S	10011SSS	ZSCPA	Subtract register from A with borrow
SBI #	11011110 db	ZSCPA	Subtract immediate from A with borrow
SHLD a	00100010 1b hb	-	Store H:L to memory*
SPHL	11111001	-	Set SP to content of H:L
STA a	00110010 1b hb	-	Store A to memory
STAX RP	00RP0010 *1	-	Store indirect through BC or DE
STC	00110111	C	Set Carry flag
SUB S	10010SSS	ZSCPA	Subtract register from A
SUI #	11010110 db	ZSCPA	Subtract immediate from A
XCHG	11101011	-	Exchange DE and HL content
XRA S	10101SSS	ZSPCA	Exclusive OR register with A
XRI #	11101110 db	ZSPCA	Exclusive OR immediate with A
XTHL	11100011	-	Swap H:L with top word on stack

\*1 = Only RP=00(BC) and 01(DE) are allowed for LDAX/STAX

\*2 = RP=11 refers to PSW for PUSH/POP (cannot push/pop SP).

When PSW is POP'd, ALL flags are affected.

Encoding	Inst	Flags	Description
00000000	NOP	-	No operation
00000111	RLC	C	Rotate A left
00001111	RRC	C	Rotate A right
00010111	RAL	C	Rotate A left through carry*
00011111	RAR	C	Rotate A right through carry
00100010 1b hb	SHLD a	-	Store H:L to memory*
00100111	DAA	ZSPCA	Decimal Adjust accumulator
00101010 1b hb	LHLD a	-	Load H:L from memory*
00101111	CMA	-	Complement A
00110010 1b hb	STA a	-	Store A to memory
00110111	STC	C	Set Carry flag
00111010 1b hb	LDA a	-	Load A from memory
00111111	CMC	C	Complement Carry flag
00DDD100	INR D	ZSPA	Increment register
00DDD101	DCR D	ZSPA	Decrement register*
00DDD110 db	MVI D,#	-	Move immediate to register*
00RP0001 1b hb	LXI RP,#	-	Load register pair immediate*
00RP0010 *1	STAX RP	-	Store indirect through BC or DE
00RP0011	INX RP	-	Increment register pair
00RP1001	DAD RP	C	Add register pair to HL (16 bit add)*
00RP1010 *1	LDAX RP	-	Load indirect through BC or DE
00RP1011	DCX RP	-	Decrement register pair
01110110	HLT	-	Halt processor
01DDSSSS	MOV D,S	-	Move register to register*
1000SSSS	ADD S	ZSPCA	Add register to A
10001SSS	ADC S	ZSPCA	Add register to A with carry
10010SSS	SUB S	ZSPCA	Subtract register from A
10011SSS	SBB S	ZSPCA	Subtract register from A with borrow
10100SSS	ANA S	ZSPCA	AND register with A
10101SSS	XRA S	ZSPCA	Exclusive OR register with A
10110SSS	ORA S	ZSPCA	OR register with A
10111SSS	CMP S	ZSPCA	Compare register with A
11000011 1b hb	JMP a	-	Unconditional jump*
11000110 db	ADI #	ZSPCA	Add immediate to A
11001001	RET	-	Unconditional return from subroutine
11001101 1b hb	CALL a	-	Unconditional subroutine call
11001110 db	ACI #	ZSPCA	Add immediate to A with carry*
11010011 pa	OUT p	-	Write A to output port
11010110 db	SUI #	ZSPCA	Subtract immediate from A
11011011 pa	IN p	-	Read input port into A
11011110 db	SBI #	ZSPCA	Subtract immediate from A with borrow
11100011	XTHL	-	Swap H:L with top word on stack
11100110 db	ANI #	ZSPCA	AND immediate with A
11101001	PCHL	-	Jump to address in H:L
11101011	XCHG	-	Exchange DE and HL content
11101110 db	XRI #	ZSPCA	Exclusive OR immediate with A
11110011	DI	-	Disable interrupts
11110110	ORI #	ZSPCA	OR immediate with A
11111001	SPHL	-	Set SP to content of H:L
11111011	EI	-	Enable interrupts
11111110	CPI #	ZSPCA	Compare immediate with A
11CCC000	Rccc	-	Conditional return from subroutine
11CCC010 1b hb	Jccc a	-	Conditional jump*
11CCC100 1b hb	CCc a	-	Conditional subroutine call
11NNN111	RST n	-	Restart (Call n*8)
11RP0001 *2	POP RP	*2	Pop register pair from the stack
11RP0101 *2	PUSH RP	-	Push register pair on the stack

\*1 = Only RP=00(BC) and 01(DE) are allowed for LDAX/STAX

\*2 = RP=11 refers to PSW for PUSH/POP (cannot push/pop SP).

When PSW is POP'd, ALL flags are affected.

### Example program: Kill-The-Bit game

To enter the kill-the-bit game below into the ALTair:

1. Activate RESET
2. Set SW7-0 to first byte of program (041 octal, 00 100 001 binary)
3. Activate DEPOSIT
4. Set SW7-0 to next byte of program
5. Activate DEPOSIT NEXT
6. Repeat steps 4-5 until all bytes have been entered
7. If running the simulator on an Arduino MEGA, the game runs slow.  
To compensate, change the content of memory location 006 from 016 to 056 (all octal).

To run the game:

1. Activate RESET
2. Set SW15-8 switches to 0
3. Activate RUN

To save the game to Arduino storage:

1. Set SW15-8 to 0 (selects memory page 0)
2. Set SW7 to 1 (selects memory page operation)
3. Set SW6 to 1 (selects memory page save)
4. Set SW5-0 to 0 (selects file number 0)
5. Activate AUX1 down

To load the game from Arduino storage:

1. Set SW15-0 as above, except SW6 to 0 (selects memory page load)
2. Activate AUX1 down

```

; Kill the Bit game by Dean McDaniel, May 15, 1975
;
; Object: Kill the rotating bit. If you miss the lit bit, another
;         bit turns on leaving two bits to destroy. Quickly
;         toggle the switch, don't leave the switch in the up
;         position. Before starting, make sure all the switches
;         are in the down position.
;
0000                                org    0
0000 210000                        lxi    h,0      ; initialize counter
0003 1680                          mvi    d,080h   ; set up initial display bit
0005 010E00                        lxi    b,0eh    ; higher value = faster
0008 1A          beg:              ldax    d        ; display bit pattern on
0009 1A                          ldax    d        ; ...upper 8 address lights
000A 1A                          ldax    d
000B 1A                          ldax    d
000C 09                          dad     b          ; increment display counter
000D D20800                        jnc     beg
0010 DBFF                          in     0ffh    ; input data from sense switches
0012 AA                          xra     d        ; exclusive or with A
0013 0F                          rrc          ; rotate display right one bit
0014 57                          mov     d,a      ; move data to display reg
0015 C30800                        jmp     beg      ; repeat sequence
0018                                end
```

Here is the program in octal for easier entry into the Altair:

```
000: 041 000 000 026 200 001 016 000
010: 032 032 032 032 011 322 010 000
020: 333 377 252 017 127 303 010 000
```

# **MIT S Programming System II**

[adapted from altairclone.com]

The MIT S Programming System II allows development of 8080 assembly language applications on the Altair 8800 using just paper tape or cassette for mass storage. The package consists of an editor, assembler, debugger and a monitor that allows execution of these programs as well as the programs you may develop.

To use the programming package, the monitor program is loaded from paper tape or cassette in the same manner as loading BASIC. Once loaded, the monitor is then used to load the editor, assembler, debugger or user programs.

The monitor loads from paper tape or cassette using the same bootstrap loader as would be used for BASIC version 3.2. Sense switch settings are the same with the addition of A9 functionality:

A9 up – the monitor does NOT use serial input interrupts

A9 down – the monitor uses serial input interrupts

## **Loading the Monitor, Editor and Assembler**

- 1) Raise A9 if you want to disable interrupts. If interrupts are enabled, serial replay is slower (because it must run at a specific baud rate). On the other hand, enabling interrupts enables the use of Ctrl-C.
- 2) Set A7-A0 to 00000110 and then push AUX2 down to load the monitor.
- 3) The monitor prompt is two spaces and "?"
- 4) STOP! Do not type any commands to see "what happens." If what is typed is not a command, the monitor tries loading a program of that name from the cassette and hangs there until you provide that program. If the ABS device has been set to audio-cassette (AC), then Ctrl-C will return to the monitor prompt if interrupts were enabled during the boot process. Otherwise, follow the instructions below to restart the monitor from the front panel.
- 5) Assign the program load device to the cassette, type: "OPN ABS,AC<cr>"
- 6) Load the editor, type: "EDT<cr>" and then send the editor .bin file through the cassette port. When loaded, the editor's prompt "\*" is displayed. Type "E<cr>" to return the monitor.
- 7) Move the editor's buffer location into high memory so the assembler can reside in memory at the same time as the editor. For larger programs, more than the default 2K of buffer space will probably be needed as well. Here are settings for an 8K buffer:
  - Type "DEP 5124<cr>" and enter "0<cr>" then "100<cr>" then ctrl-z.
  - This specifies the 16-bit octal address 40000 (0x4000) for buffer start.
  - Type "DEP 5530<cr>" and enter "0<cr>" then "140<cr>" then ctrl-z.
  - This specifies the 16-bit octal address 60000 (0x6000) for buffer end.
- 8) Load the assembler, type: "AM2<cr>" and then send the assembler version 2 .bin file through the cassette port. When loaded, the assembler prompt is "\*ASM\*<cr>". Type "EOA<cr>" (end of assembly) to return to the monitor.
- 9) DBG, EDT and ASM share the same memory space (see Memory Allocation section below). If two of them are loaded sequentially, the system will just start the second one loaded, even if invoking the first. For example, if EDT is loaded first and then ASM, the monitor will invoke ASM if EDT is typed as a command. To force reloading of a component, use CLR to remove it from the program table, i.e. in the situation mentioned before, typing CLR EDT and then EDT will invoke the editor.

The computer is now ready to iteratively edit, assemble and run/test a program.

## Using the Editor and Assembler

1. To start the editor, type: "EDT<cr>" This starts the editor and clears the edit buffer. To subsequently re-edit a program, type "EDT(R)<cr>" This leaves the existing source code in memory. If the "(R)" is left off, the program source will be erased.
2. At the editor prompt type "I" for insert. Ctrl-Z exits the insert mode. "P" prints (displays) the file with line numbers. "W" displays the file without line numbers. "D line[,line]" deletes line(s). "R line" replaces a line. "I line" inserts after the specified line. "I" by itself inserts before the first line. "E" exits the editor and returns control to the monitor.
3. End programs with:
  - BEG start label
  - END program name
  - EOAWhere "start label" is the program entry point, "program name" is a three character program name. "EOA" means end of assembly.
4. Assign source file input to come from the edit buffer instead of a device and declare file type of ASCII (text file): Type, "OPN FIL,EB,A<cr>" This only has to be done once during a session (or if the FIL device was subsequently assigned to a different device during the session).
5. Run the assembler: Type "AM2<cr>"
6. Tell the assembler to take input from a file: Type "FILE<cr>" The assembler will run and show errors and undefined symbols. Note: The "Undefined Symbols" heading is displayed even when there are no undefined symbols. Control is returned to the monitor.
7. Run the program by jumping to the starting address: Type "JMP xxxxxx" where xxxxxx is the program starting address in octal.
8. You can enter the program into the monitor's program table as follows: After a successful assembly, re-enter the assembler and preserve symbols: Type "AM2(P)<cr>"
9. Type "RUN name<cr>" where name is the three character name for the program. The program will run. From here on, the program can be run by typing the "name" specified at the monitor prompt. This step does not have to be repeated after subsequent assemblies if the entry address has not changed.

## Memory Allocation

- The monitor is about 2.5K in length and uses RAM up through 0x0A3F
- The editor is about 2K in length and resides just above the monitor at 0xA40 – 0x11B1, followed by the default 2K edit buffer space from 0x11B2 – 0x19B1.
- Two versions of the assembler are available. Each are about 3K in length. ASM (assembler version 1) loads at the same address as the editor (0xA40). This is inconvenient for the iterative cycle of edit, assemble and test. As an alternative, AM2 (assembler version 2) loads just above the editor at 0x1350 – 0x1D78. The assembler's symbol table grows up from 0x1D78. Note that the default location of the edit buffer conflicts with the load address of AM2 as the edit buffer grows. Before using the editor for longer programs, the location of the edit buffer should be moved to a free area in memory by using the monitor DEP command to patch the buffer start address into octal locations 5124-5125 and the buffer end address+1 into octal locations 5530-5531.
- When using the AM2 assembler, a program loaded at 0x2000 leaves about 650 bytes of symbol table space (0x1D78 – 0x1FFF). This is enough for small demo programs of 100 lines or less. Otherwise, a higher starting address should be used for the target program
- The debugger is about 2K in length and overlays the editor at 0xA40 – 0x133F. The debugger and AM2 assembler can both reside in memory at the same time. This makes it easy to patch programs with the assembler while debugging the program.

## Loading and Saving Files

1. Assign the FIL device to the audio cassette and specify ASCII files:  
Type "OPN FIL,AC,A<cr>"
2. In the editor, type "L<cr>" to load a source file. Type "S<cr>" to save a source file.
3. After loading a source file into the editor, you can re-assign FIL to the edit buffer for use as the assembler input: Type "OPN FIL,EB,A<cr>"
4. When you want to save an edited file after the edit and assemble process, be sure to set the FIL device back to AC before using the "S" command from within the editor.
5. Optionally, you can take assembler source file input from the audio cassette. After assigning FIL to the AC (see step 2), in the assembler, type "FILE name<cr>" where "name" is the three character source file name for the assembler to read. The source file is then read directly from the audio cassette instead of the edit buffer.

## Additional Notes

- When using the edit buffer as the source for the assembler, the source file must be "rewound" by editing the source file in between successive assemblies.
- To restart the monitor, stop the machine, set all switches off except A6 (i.e., set address of octal 100). Raise examine, set front panel switches back the way they were at load time, then depress run.
- When sending large amounts of text (e.g. pasting source code into the serial terminal), it may come out corrupted because if the serial interface speed is greater than 1200 baud because the editor/assembler cannot process the arriving characters at that speed, so some get lost. You may need to drop the host serial interface speed to 1200 baud (via the configuration editor).

## Example usage #1: assemble directly from input

- |                            |   |
|----------------------------|---|
| 1) [STOP]+[RESET]          | reset Altair  |
| 2) [A2, A1 up]             | select program #6 (PS2 monitor)                               |
| 3) [AUX1 down]             | load and run PS2 monitor and mount PS2 cassette tape          |
| 4) OPN ABS,AC              | assign ACR to ABS device (to load editor/assembler)           |
| 5) AM2                     | start assembler (to load it into memory)                      |
| 6) [CLR]                   | un-mount the PS2 tape   |
| 7) [A7 up, A2 down, A1 up] | select ASM example #2 ("dump" example from PS2 documentation) |
| 8) [AUX2 down]             | start ASM source code example replay                          |
| 9) RUN DUMP                | runs DMP example directly from assembler                      |

## Example usage #2: insert into edit buffer, then assemble

- |                   |  |
|-------------------|--|
| 1) [STOP]+[RESET] | reset Altair   |
| 2) [A2, A1 up]    | select program #6 (PS2 monitor)                      |
| 3) [AUX1 down]    | load and run PS2 monitor and mount PS2 cassette tape |
| 4) OPN ABS,AC     | assign ACR to ABS device (to load editor/assembler)  |
| 5) EDT            | start editor (to load it into memory)                |
| 6) E              | end editor   |
| 7) AM2            | start assembler (to load it into memory)             |
| 8) EOA            | exit assembler                                       |
| 9) DEP 5124       | move edit buffer to 0x4000-0x6000 = 8K length        |
| 10) 0             | start address 100-000 = 40000 octal = 0x4000         |
| 11) 100           |  |
| 12) [CTRL-Z]      | end of input   |
| 13) DEP 5530      |  |
| 14) 0             | end address 140-000 = 60000 octal = 0x6000           |
| 15) 140           |  |

16) [CTRL-Z]	end of input
17) EDT	start editor again (with new buffer)
18) I	enter "insert" mode
19) [CLR]	un-mount the PS2 tape
20) [A7 up, A2 down, A1 down, A0 up] or [A7 up, A2 down, A1 up]	select ASM example #1 (PONG) select ASM example #2 (DUMP)
21) [AUX2 down]	start ASM source code example replay
22) [CTRL-Z]	exit "insert" mode after example is loaded
23) E	exit editor
24) OPN FIL,EB,A	select edit buffer as input device
25) AM2(S)	go into assembler (S parameter to print symbol table at end)
26) FILE	load input file (from edit buffer)
27) EOA	return to monitor
28) JMP 20000	run program

### Example usage #3: insert into edit buffer, assemble, write to file, run file

1) [STOP]+[RESET]	reset Altair
2) [A2, A1 up]	select program #6 (PS2 monitor)
3) [AUX1 down]	load and run PS2 monitor and mount PS2 cassette tape
4) OPN ABS,AC	assign ACR to ABS device (to load editor/assembler)
5) EDT	start editor (to load it into memory)
6) E	end editor
7) AM2	start assembler (to load it into memory)
8) EOA	exit assembler
9) DEP 5124	move edit buffer to 0x4000-0x6000 = 8K length
10) 0	start address 100-000 = 40000 octal = 0x4000
11) 100	
12) [CTRL-Z]	end of input
13) DEP 5530	
14) 0	end address 140-000 = 60000 octal = 0x6000
15) 140	
16) [CTRL-Z]	end of input
17) EDT	start editor again (with new buffer)
18) I	enter "insert" mode
19) [CLR]	un-mount the PS2 tape from ACR
20) [A7 up, A2 down, A1 down, A0 up]	select ASM example #1 (PONG)
21) [AUX2 down]	start ASM source code example replay
22) [CTRL-Z]	exit "insert" mode after example is loaded
23) E	exit editor
24) OPN FIL,EB,A	select edit buffer as input device
25) AM2(S,A)	go into assembler (S parameter to print symbol table at end, A to dump output binary to file)
26) [A15, A13, A8 up, A7 down]	Prepare to capture file #1 from ACR device
27) FILE	load input file (from edit buffer)
[wait for "SENSE SW 15 FOR DUMP" message]	
28) [AUX2 up]	start capturing
29) [A15 down, A15 up]	tells AM2 to start writing
[wait for "?" prompt from PS2 monitor]	
30) [AUX2 up]	finish capturing
31) [AUX2 down]	start replay
32) PONG	load and run PONG




## Hardware setup for Arduino Mega 2560


What makes the Arduino Mega 2560 perfect for this project is that it has exactly the right number of I/O pins to connect all the Altair's input/output elements:

Altair:	12	Status LEDs (INT,WO,STACK,HLTA,OUT,M1,INP,MEMR,PROT,INTE,WAIT,HLDA)
	8	Data bus LEDs (D0-D7)
	16	Address bus LEDs (A0-A15)
	16	Input switches (SW0-15)
	16	Function switches (RUN,STOP,EXAMINE,EXAMINE NEXT,DEPOSIT,DEPOSIT NEXT,RESET,CLR,PROTECT,UNPROTECT,AUX1 UP/DOWN,AUX2 UP/DOWN)
	2	Connections for serial RX/TX
	<b>70</b>	<b>(digital) inputs/outputs required</b>
Arduino Mega 2560:	54	Digital I/O pins
	16	Analog input pins (can be used for digital input)
	<b>70</b>	<b>I/O lines available</b>


For simplicity, we connect the Altair's 16 input switches (SW0-15) to the Arduino's 16 analog inputs. These are SPDT On-On switches that alternate between two settings:



For the function switches we use the Arduino's internal pull-up resistors and just switch GND to the appropriate digital input. These are momentary SPDT (On)-Off-(On) switches. For example, the EXAMINE/EXAMINE NEXT switch is connected like this:



To drive the output LEDs we just use a simple transistor switch circuit for each LED (to prevent overload on the Arduino if too many of the LEDs are on at the same time):

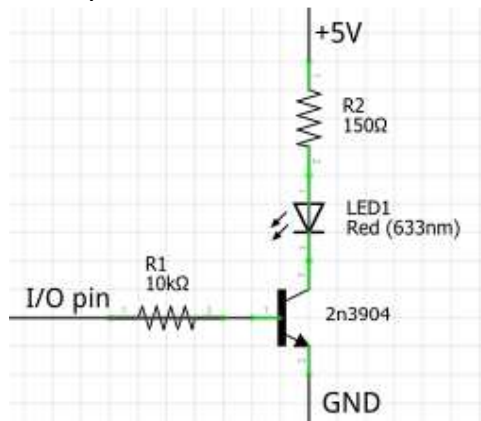

See the following page for a mapping of exactly which front panel element maps to which Arduino I/O pin.

## Pin mapping for Arduino Mega 2560

Mapping Arduino pin to Altair element

Arduino Pin	Altair Element	Direction	Arduino Pin	Altair Element	Direction
D0	Serial RX	in	D35	A10	out
D1	Serial TX	out	D36	A9	out
D2	AUX1 UP	in	D37	A8	out
D3	AUX1 DOWN	in	D38	INTE	out
D4	STEP	in	D39	PROT	out
D5	SLOW	in	D40	WAIT	out
D6	EXAMINE	in	D41	HLDA	out
D7	EXAMINE NEXT	in	D42	D7	out
D8	DEPOSIT	in	D43	D6	out
D9	DEPOSIT NEXT	in	D44	D5	out
D10	OUT	out	D45	D4	out
D11	M1	out	D46	D3	out
D12	INP	out	D47	D2	out
D13	MEMR	out	D48	D1	out
D14	AUX1 UP	in	D49	D0	out
D15	AUX1 DOWN	in	D50	HLTA	out
D16	PROTECT	in	D51	STACK	out
D17	UNPROTECT	in	D52	WO	out
D18	RESET	in	D53	INT	out
D19	CLR	in	A0	SW0	in
D20	RUN	in	A1	SW1	in
D21	STOP	in	A2	SW2	in
D22	A0	out	A3	SW3	in
D23	A1	out	A4	SW4	in
D24	A2	out	A5	SW5	in
D25	A3	out	A6	SW6	in
D26	A4	out	A7	SW7	In
D27	A5	out	A8	SW8	In
D28	A6	out	A9	SW9	In
D29	A7	out	A10	SW10	In
D30	A15	out	A11	SW11	In
D31	A14	out	A12	SW12	In
D32	A13	out	A13	SW13	In
D33	A12	out	A14	SW14	In
D34	A11	out	A15	SW15	In


# Mapping Altair element to Arduino pin

Altair Element	Arduino Pin	Direction	Altair Element	Arduino Pin	Direction
SW0	A0	in	A0	D22	out
SW1	A1	in	A1	D23	out
SW2	A2	in	A2	D24	out
SW3	A3	in	A3	D25	out
SW4	A4	in	A4	D26	out
SW5	A5	in	A5	D27	out
SW6	A6	in	A6	D28	out
SW7	A7	in	A7	D29	out
SW8	A8	in	A8	D37	out
SW9	A9	in	A9	D36	out
SW10	A10	in	A10	D35	out
SW11	A11	in	A11	D34	out
SW12	A12	in	A12	D33	out
SW13	A13	in	A13	D32	out
SW14	A14	in	A14	D31	out
SW15	A15	in	A15	D30	out
STOP	D21	in	D0	D49	out
RUN	D20	in	D1	D48	out
SINGLE STEP	D4	in	D2	D47	out
SLOW	D5	in	D3	D46	out
EXAMINE	D6	in	D4	D45	out
EXAMINE NEXT	D7	in	D5	D44	out
DEPOSIT	D8	in	D6	D43	out
DEPOSIT NEXT	D9	in	D7	D42	out
RESET	D18	in	INT	D53	out
CLR	D19	in	WO	D52	out
PROTECT	D16	in	STACK	D51	out
UNPROTECT	D17	in	HLTA	D50	out
AUX1 UP	D14	in	OUT	D10	out
AUX1 DOWN	D15	in	M1	D11	out
AUX2 UP	D2	in	INP	D12	out
AUX2 DOWN	D3	in	MEMR	D13	out
Serial RX	D0	in	PROT	D39	out
Serial TX	D1	out	INTE	D38	out
			WAIT	D40	out
			HLDA	D41	out


## Hardware setup for Arduino Due

The setup for the Arduino Due is similar to the Arduino Mega (see above), just the pins are different (because the simulator accesses some of the pins directly by their processor register to increase efficiency). See the next page for the Arduino Due connections.

- LED drivers: Same as for the Arduino Mega. Note that the LED driver still uses +5V even though the Due runs at 3.3V (because the voltage is only used for lighting the LEDs).
- Function switches: Same as for the Arduino Mega (only different pins)
- Address switches: On the Due we can access the analog input pins just like digital inputs, including the ability to switch on an internal pullup resistor. That slightly simplifies the setup for the SW0-SW15 switches as we do not have to connect Vcc to the switches, only GND:

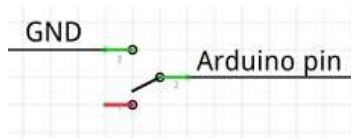

- The reset circuit on (some) Due boards is not very reliable at power-up (this seems to be a common problem), leaving the Due sometimes in a blocked state after power-up. If you experience this, a simple workaround is to add a capacitor and resistor to keep the RESET line low for a bit longer at power-up. This has worked fine for me and not caused any side effects.

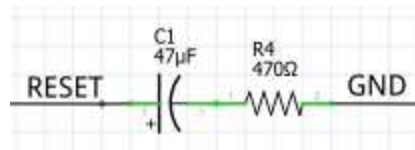

- In the mapping on the next pages you will see some Arduino pins shown with two labels, for example A0 (D54). In this case, A0 is the label on the board and D54 is the digital pin number that relates to that connection (i.e. Analog input 0 (A0) can be accessed as Digital input 54 (D54))

## Pin mapping for Arduino Due

Mapping Arduino pin to Altair element

Arduino Pin	Altair Element	Direction	Arduino Pin	Altair Element	Direction
D0	Unused		D36	A2	out
D1	Unused		D37	A3	out
D2	INT	out	D38	A4	out
D3	WO	out	D39	A5	out
D4	STACK	out	D40	A6	out
D5	HLTA	out	D41	A7	out
D6	OUT	out	D42	SW14	in
D7	M1	out	D43	SW15	in
D8	INP	out	D44	A15	out
D9	MEMR	out	D45	A14	out
D10	WAIT	out	D46	A13	out
D11	D7	out	D47	A12	out
D12	INTE	out	D48	A11	out
D13	PROT	out	D49	A10	out
D14	D4	out	D50	A9	out
D15	D5	out	D51	A8	out
D16	SW9	in	D52	RESET	in
D17	SW8	in	D53	CLR	in
D18	Serial TX	out	A0 (D54)	STEP	in
D19	Serial RX	in	A1 (D55)	SLOW	in
D20	RUN	in	A2 (D56)	EXAMINE	in
D21	STOP	in	A3 (D57)	EXAMINE NEXT	in
D22	HLDA	out	A4 (D58)	DEPOSIT	in
D23	SW10	in	A5 (D59)	DEPOSIT NEXT	in
D24	SW11	in	A6 (D60)	PROTECT	in
D25	D0	out	A7 (D61)	UNPROTECT	in
D26	D1	out	A8 (D62)	SW0	in
D27	D2	out	A9 (D63)	SW1	in
D28	D3	out	A10 (D64)	SW2	in
D29	D6	out	A11 (D65)	SW3	in
D30	AUX1 UP	in	DAC0 (D66)	SW4	in
D31	AUX1 DOWN	in	DAC1 (D67)	SW5	in
D32	AUX2 UP	in	CANRX (D68)	SW6	in
D33	AUX2 DOWN	in	CANTX (D69)	SW7	in
D34	A0	out	SDA1 (D70)	SW12	in
D35	A1	out	SCL1 (D71)	SW13	in

# Mapping Altair element to Arduino pin

Altair Element	Arduino Pin	Direction	Altair Element	Arduino Pin	Direction
SW0	A8 (D62)	in	A0	D34	out
SW1	A9 (D63)	in	A1	D35	out
SW2	A10 (D64)	in	A2	D36	out
SW3	A11 (D65)	in	A3	D37	out
SW4	DAC0 (D66)	in	A4	D38	out
SW5	DAC1 (D67)	in	A5	D39	out
SW6	CANRX (D68)	in	A6	D40	out
SW7	CANTX (D69)	In	A7	D41	out
SW8	D17	in	A8	D51	out
SW9	D16	in	A9	D50	out
SW10	D23	in	A10	D49	out
SW11	D24	in	A11	D48	out
SW12	SDA1 (D70)	in	A12	D47	out
SW13	SCL1 (D71)	in	A13	D46	out
SW14	D42	in	A14	D45	out
SW15	D43	in	A15	D44	out
STOP	D21	in	D0	D25	out
RUN	D20	in	D1	D26	out
SINGLE STEP	A0 (D54)	in	D2	D27	out
SLOW	A1 (D55)	in	D3	D28	out
EXAMINE	A2 (D56)	in	D4	D14	out
EXAMINE NEXT	A3 (D57)	in	D5	D15	out
DEPOSIT	A4 (D58)	in	D6	D29	out
DEPOSIT NEXT	A5 (D59)	in	D7	D11	out
RESET	D52	in	INT	D2	out
CLR	D53	in	WO	D3	out
PROTECT	A6 (D60)	in	STACK	D4	out
UNPROTECT	A7 (D61)	in	HLTA	D5	out
AUX1 UP	D30	in	OUT	D6	out
AUX1 DOWN	D31	in	M1	D7	out
AUX2 UP	D32	in	INP	D8	out
AUX2 DOWN	D33	in	MEMR	D9	out
Serial RX	D19	in	PROT	D13	out
Serial TX	D18	out	INTE	D12	out
			WAIT	D10	out
			HLDA	D22	out


## Wiring an SD card to Arduino Due

Standard Arduino SD card shields will not work with the Arduino Due because the SPI pins are not connected to the D13-D11 pins as in other Arduino board. That is a good thing because we're already using the D13-D11 pins for front panel elements.

On the DUE, the SPI pins are **only** available on the separate 2-row, 6-pin SPI header (labeled "SPI" on the board).

There are commercial products such as the SparkFun Level Shifting microSD Breakout board that provide an SD card slot. That board is certainly works but is overkill since the Arduino DUE (like the SD cards) operates on 3.3V so no level shifting is required.

In fact, an SD card can be wired directly (without any other required electronic elements) to the SPI header on the Due:

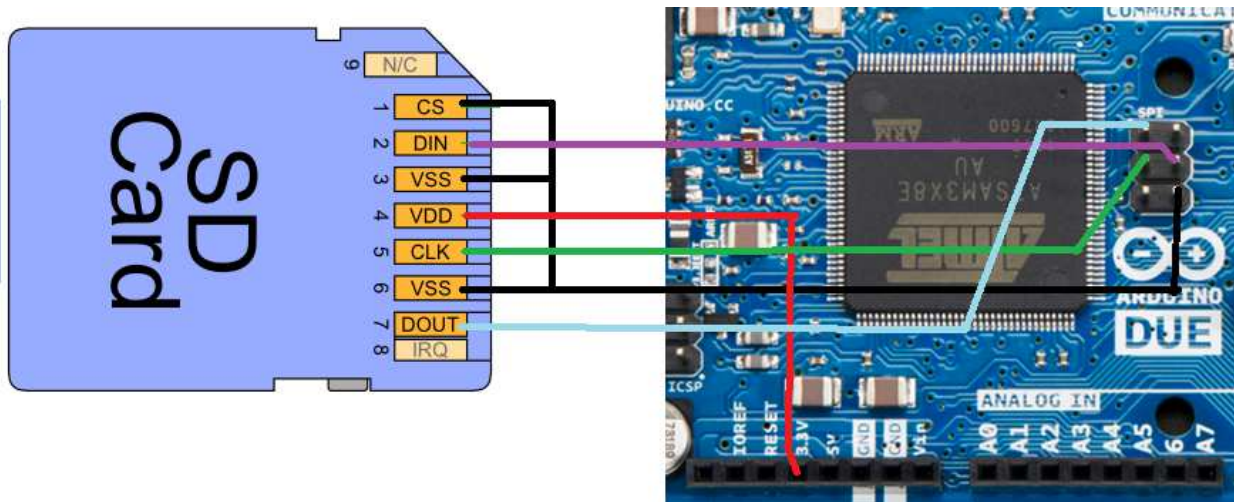

- Unfortunately, there is no 3.3V pin on the SPI header on the Arduino Due so that wire must go to the (separate) 3.3V pin. Do not wire the 5V output from the SPI header to the card. Doing so could damage the SD card and/or the Due.
- The CS (chip select) pin is wired directly to GND, so the SD card is always selected. That saves us from having to find another I/O pin on the Arduino to use for chip select. The SD library on the Arduino requires to specify a Chip Select output pin but the simulator software sets that to the HLDA light output pin which as a side effect gives a "sd card active" visual indicator.

I recommend getting a microSD card with a microSD-to-SD adapter. Take the microSD card out of the adapter and create a cable by soldering wires directly to the adapter's pins and connecting them to the SPI header using the wiring given above. The adapter now serves as the socket for the microSD card, which can be plugged in and taken out easily.