




target model

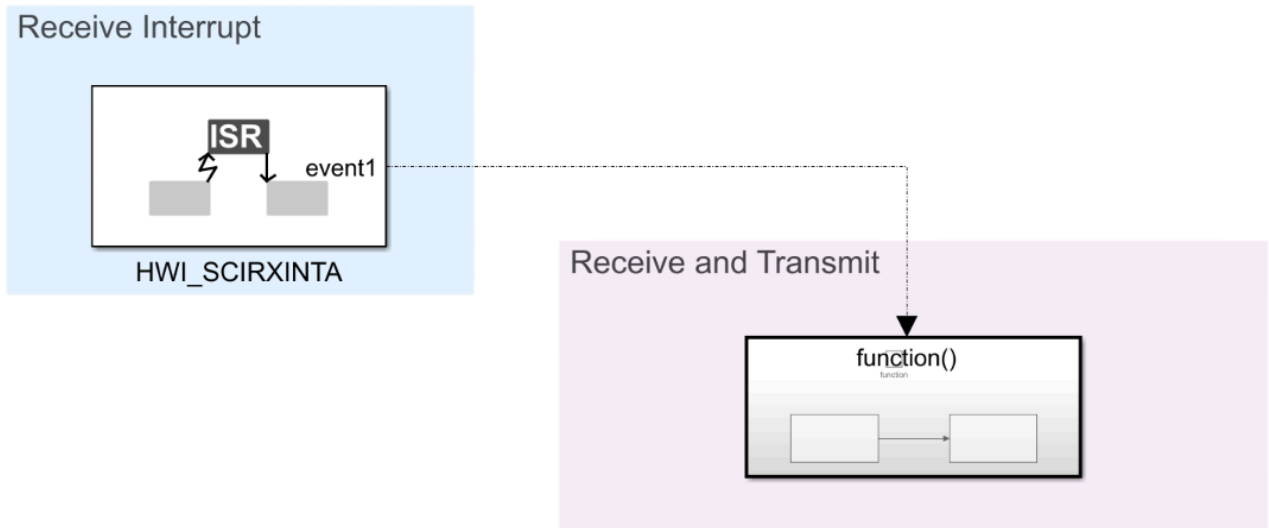

1. configuration

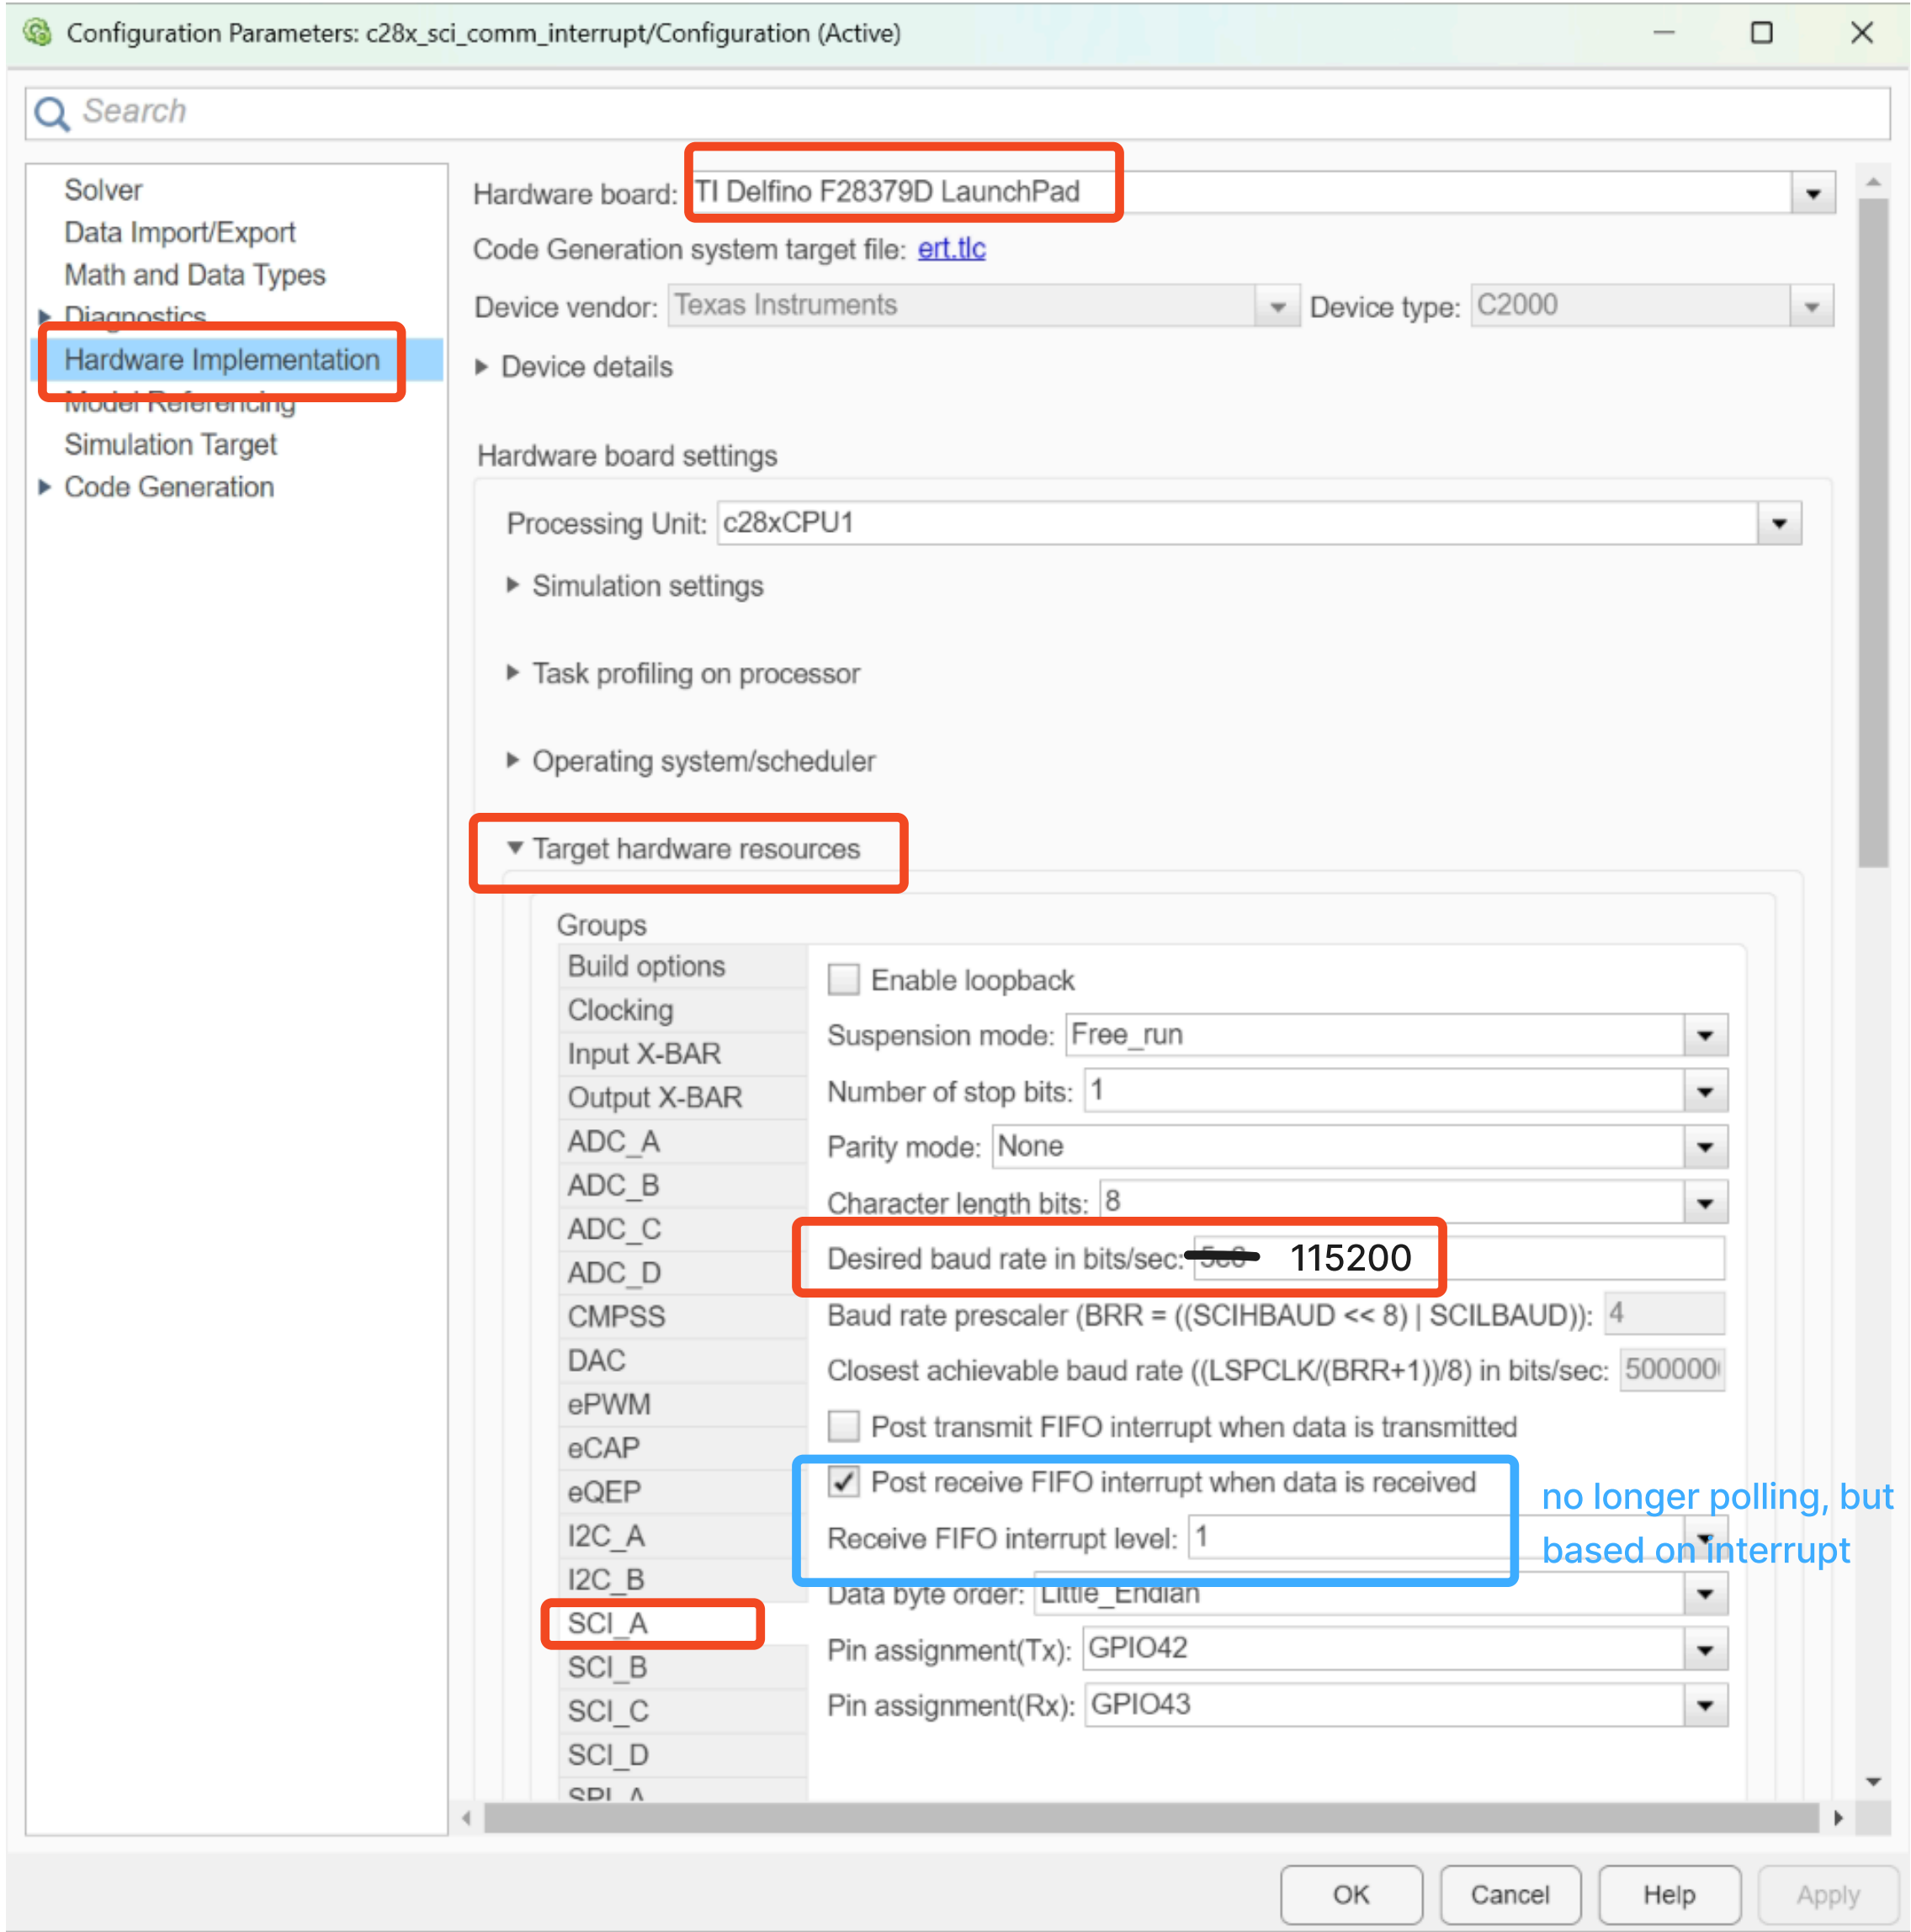

2. function blocks setting

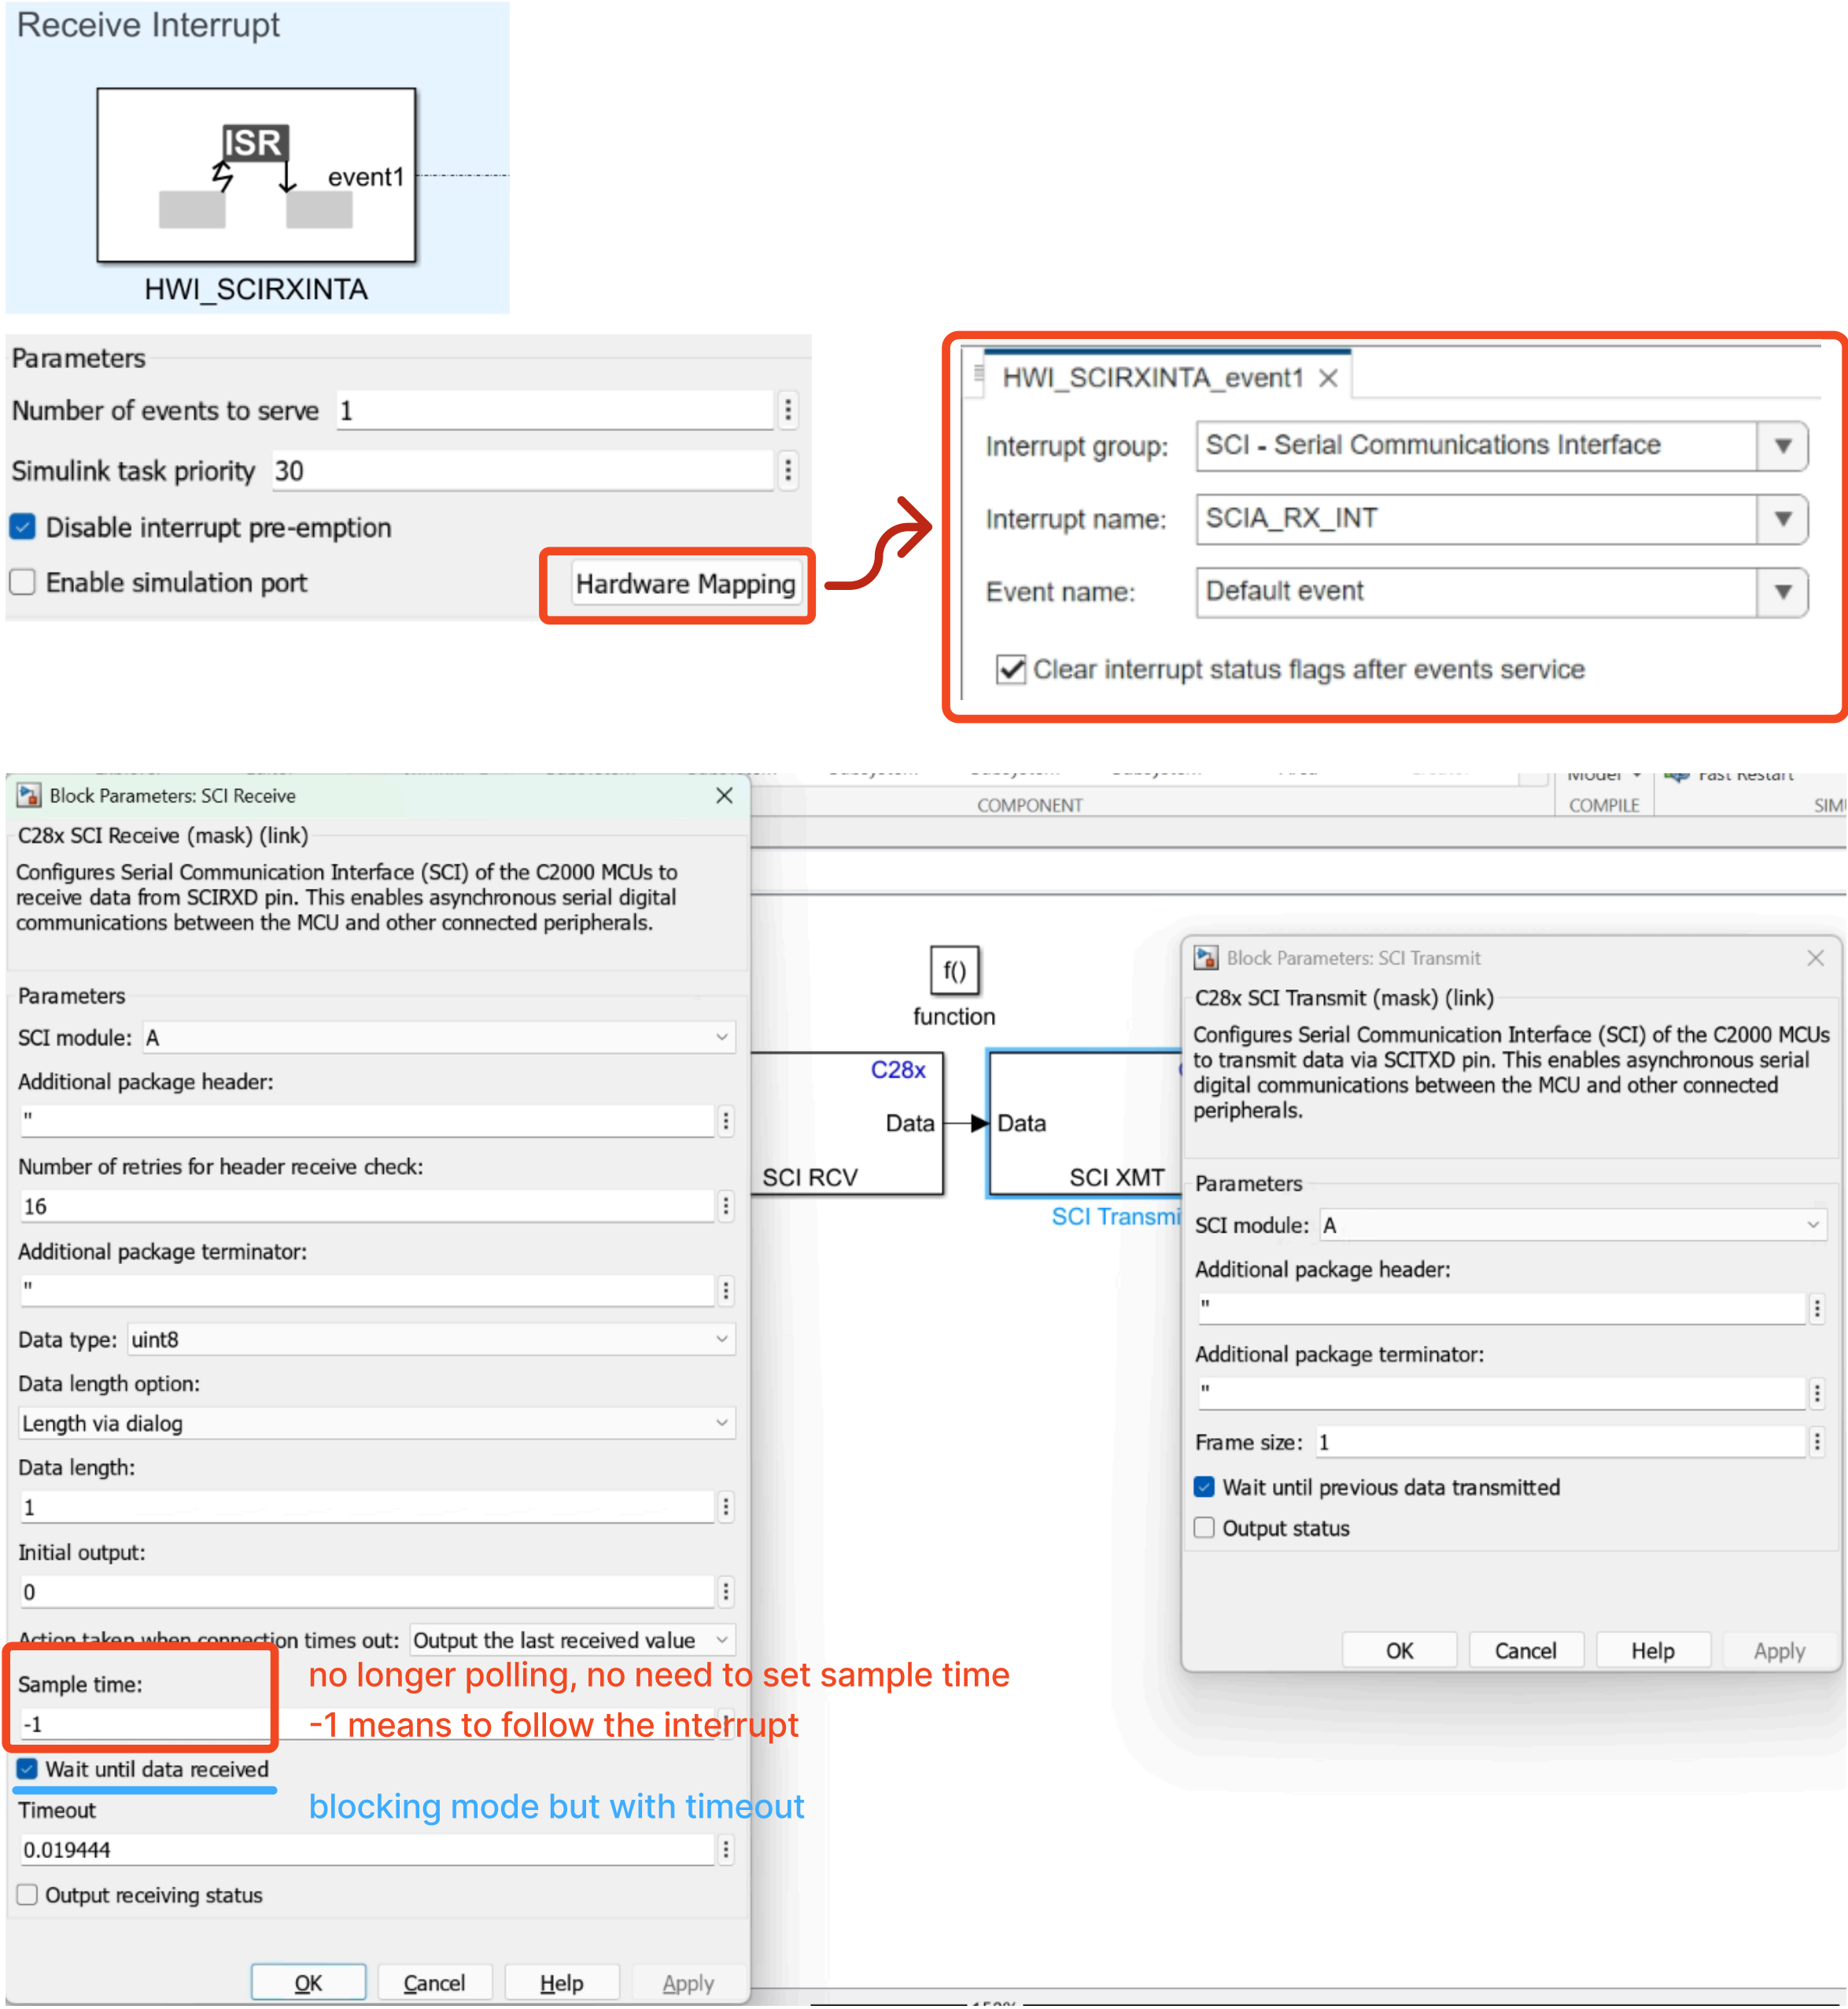

3. Build, Deploy & Start target model

host .m script

1. run the function with the port seen from device manager and baudrate

```
c2000HostSCICommunication('COM6', 115200);

>> c2000HostSCICommunication('COM6', 115200)
Enter uint8 data: [23 15 67]
Received data 23 15 67
```