

# Channel representations of noisy coherent detection in continuous-variable quantum key distribution: Additive-noise versus attenuator

A. S. Naumchik,<sup>1,\*</sup> Roman Goncharov,<sup>1,2,†</sup> and Alexei D. Kiselev<sup>3,4,‡</sup>

<sup>1</sup>*Quantum Information Laboratory, ITMO University,  
Kadetskaya Line, 3/2, St. Petersburg, 199034, Russia*

<sup>2</sup>*SMARTS-Quanttelecom LLC, 6th Line of Vasilyevsky Island, 59/1B, St. Petersburg, 199178, Russia*

<sup>3</sup>*Laboratory for Quantum Communications, ITMO University,  
Birzhevaya Line, 16, Saint Petersburg 199034, Russia*

<sup>4</sup>*Laboratory of Quantum Processes and Measurements,  
ITMO University, Kadetskaya Line 3b, Saint Petersburg 199034, Russia*

(Dated: August 18, 2026)

We study the security of continuous-variable quantum key distribution (CV-QKD) under asymmetric coherent detection within an untrusted-detector model. We analyze the attenuator channel and the additive-noise channel. For both homodyne and double-homodyne detection, we derive the corresponding channel parameters and compare the resulting Holevo information and asymptotic secret fraction.

For the parameter sets considered, receiver asymmetry degrades the protocol performance for both channel models, but neither model gives uniformly more or less pessimistic security estimates. For homodyne detection, the attenuator model gives a lower secret fraction at higher transmittance but retains a positive secret fraction over a longer distance.

In the double-homodyne case, the channel parameters and the Holevo information, and hence the resulting secret fraction, depend on the squeezing parameter  $r$  that defines ideal measurements. For the parameter sets considered, the Holevo information as a function of  $r$  is concave for the additive-noise channel and convex for the attenuator channel. It follows that both the choice of  $r$  and the channel representation affect the resulting secret fraction.

## I. INTRODUCTION

Homodyne and double-homodyne (heterodyne) detection are standard coherent-detection schemes in quantum optics and continuous-variable (CV) quantum information [1–3]. Homodyne detection implements a Gaussian measurement of a single field quadrature, whereas double-homodyne detection performs a joint but necessarily noisy measurement of two conjugate quadratures. These schemes find wide application across various domains, ranging from quantum state tomography [4, 5] and quantum state preparation [6] to a broad class of quantum communication protocols, including continuous-variable quantum key distribution (CV-QKD) [7–9].

In the limit of a strong local oscillator, these coherent measurement schemes function as Gaussian measurements, yielding a Gaussian probability distribution of outcomes for any input Gaussian state [10–12]. In an ideal, noiseless setup, homodyne detection implements projective measurements onto quadrature eigenstates, whereas double homodyne detection realizes a generalized measurement described by a rank-one positive operator-valued measure (POVM) onto coherent states [12–14]. However, a practical coherent receiver is characterized by a wide range of imperfections, such as non-unit photodetector efficiencies, electronic noise, beam-splitter imbalance, and mismatched responses of the detection branches [15–19]. Under these realistic conditions, the measurements retain their Gaussian statistics but are more generally described by Gaussian positive operator-valued measures (POVMs) [12, 20, 21].

**SOMEWHERE in HERE should be historical lit rev ABOUT noisy coherent measurements**

Since quantum channels generally describe the evolution of open quantum systems, they provide a natural framework for modeling the physical degradation of information during the measurement process [20, 22–25]. Mathematically, a quantum channel  $\mathcal{C}$  is a linear, completely positive, and trace-preserving (CPTP) map that transforms an input density matrix  $\rho$  into an output state according to the Kraus representation:

$$\mathcal{C}(\rho) = \sum_k E_k \rho E_k^\dagger, \quad (1)$$

---

\* Email address: naumchik95@gmail.com

† Email address: rkgoncharov@itmo.ru

‡ Email address: alexei.d.kiselev@gmail.com

where the Kraus operators satisfy the completeness relation  $\sum_k E_k^\dagger E_k = \mathbb{I}$  [26]. In this framework, the statistics of noisy measurements can be represented either by applying a CPTP channel to the incoming state prior to an ideal measurement, or, equivalently, by applying the dual map  $\mathcal{C}^*$  to the ideal POVM [12].

This channel representation is particularly powerful in CV-QKD because it treats the physical mechanisms responsible for non-unitary evolution – such as optical losses and coupling to the environment – on an equal footing, regardless of whether they occur during propagation (due to communication channel) or on the sender (Alice)/receiver (Bob) side. Consequently, various channel models are available to capture different physical situations [27]. In CV-QKD, the most prominent are the attenuator (beam-splitter) channel [28], which is used for modeling physical losses and thermal environments, and the additive-noise channel [29], which effectively captures electronic noise or phase jitter. With a suitable choice of parameters, these channel models reproduce the exact same conditional outcome distributions after a proper rescaling of the measurement data.

The choice of channel model directly dictates the resulting security bounds in CV-QKD, as different representations distribute quantum information to unobserved degrees of freedom in distinct ways (or *estimate intruder's (Eve) information differently; choose 1*). This difference in estimation is alike to security paradigm adopted for the calibrated receiver noise. In a trusted-detector model, the degrees of freedom associated with calibrated receiver noise are assumed to remain safely inside Bob's laboratory [30–34]. In the untrusted-detector model these environmental modes are fully assigned to Eve. Under this untrusted noise paradigm, different mathematically equivalent channels yield identical calibrated statistics and mutual information, yet they generate different shared Alice-Bob states and different environmental outputs. This choice of channel model directly alters the resulting security bounds. In the untrusted-noise scenario, selecting an inappropriate or overly conservative channel model leads to vastly different values of the Holevo information, dictating a much more pessimistic performance and strictly limiting the key rate. More recent works further refine this dichotomy by considering intermediate levels of trust for loss and noise, separating Eve's knowledge of detector noise from her ability to control it [35–37]. Since the purifications of a fixed state are related by an isometry on the purifying system [26], applying alternative channels to the incoming state alters the effective Alice-Bob state prior to the ideal measurement, cementing the choice of channel representation as a fundamental physical assumption rather than a mere mathematical convenience. Representing calibrated detector noise as an effective loss has previously been used in trusted and protocol-specific receiver models [38–41]. Such equivalence at the level of receiver statistics does not by itself determine whether the corresponding environmental mode is accessible to Eve.

To address this issue, the goal of this work is to quantify the fundamental discrepancy in security bounds that arises purely from the mathematical representation of receiver imperfections. We aim to show that even with identical raw data and mutual information, the choice of the quantum channel representation introduces non-trivial physical assumptions about Eve's coupling, which can drastically alter the final security guarantees of the system.

To this end, we construct and analyze an attenuator channel of the imperfect homodyne and double-homodyne POVMs and compare it with the additive-noise channel. The channel parameters are obtained by requiring the dual channel to map the ideal POVM onto the target noisy POVM. For homodyne detection, the environmental mode is chosen to be in the vacuum state, so the attenuator takes the form of a pure-loss channel. For double-homodyne detection, the generally anisotropic measurement noise is reproduced using a pure Gaussian environmental state with unequal quadrature variances. We compare both channels within the Gaussian-modulated coherent-state (GMCS) protocol [42] with reverse reconciliation in the asymptotic regime and evaluate the asymptotic secret fraction under collective Gaussian attacks [43, 44]. In the security model adopted here, receiver asymmetry is treated as untrusted; accordingly, the environmental output of the selected channel is assigned to Eve.

This paper is organized as follows. In Sec. II, we briefly discuss the formalism behind POVMs of imperfect homodyne and double homodyne measurement schemes. In Sec. III, we model these noisy coherent detection schemes using the attenuator and additive-noise quantum channels. In Sec. IV, we calculate informational quantities defining asymptotic secret fraction in the GMCS protocol for both channel models and both coherent-measurement schemes and compare the results. Finally, in Sec. V, we provide a discussion of the results as well as concluding remarks.

## II. IMPERFECT GAUSSIAN MEASUREMENTS

We begin with a brief discussion of asymmetrical coherent measurements, schematically depicted in Fig. 1. Asymmetry effects are induced by imbalance (unequal transmission and reflection coefficients) of the beam splitters and unequal quantum efficiency of the detectors. For detailed derivations of the expressions in this section see Ref. [29].

The  $Q$  symbol of the POVM describing noisy homodyne measurements (see Fig. 1a) is

$$P_G^{(H)}(x) = \frac{1}{\sqrt{2\pi}\sigma_G} \exp\left[-\frac{(x - \langle \hat{x}_\phi \rangle)^2}{2\sigma_x}\right], \quad (2)$$

$$\langle \hat{x}_\phi \rangle \equiv \langle \alpha | \hat{x}_\phi | \alpha \rangle = 2 \operatorname{Re} \alpha e^{-i\phi}, \quad \phi = \arg \alpha_L, \quad (3)$$

$$\hat{x}_\phi = \hat{a}e^{-i\phi} + \hat{a}^\dagger e^{i\phi} \quad (4)$$

where  $\alpha$  ( $\alpha_L$ ) is the complex amplitude of signal (LO) mode,  $\hat{x}_\phi$  is the phase-rotated quadrature operator;  $x$  is the quadrature variable

$$x \equiv \frac{\mu}{(\eta_1 + \eta_2)CS|\alpha_L|} - \frac{\eta_1 S^2 - \eta_2 C^2}{(\eta_1 + \eta_2)CS} |\alpha_L| \quad (5)$$

and  $\sigma_x$  is the quadrature variance

$$\sigma_x \equiv \frac{\eta_1 S^2 + \eta_2 C^2}{[(\eta_1 + \eta_2)CS]^2}. \quad (6)$$

By computing inverse Fourier transform of  $Q$  symbol (2), we obtain anti-normal ordered characteristic function [12]. From this characteristic function we can deduce the covariance matrix of the noisy homodyne measurements as follows

$$\Sigma_m^{(H)} = \lim_{r \rightarrow +\infty} R(\phi) \operatorname{diag}(e^{-2r} + \sigma_N, e^{2r}) R^T(\phi), \quad (7)$$

$$\Sigma_{\text{id}}^{(H)} = \lim_{r \rightarrow +\infty} R(\phi) \operatorname{diag}(e^{-2r}, e^{2r}) R^T(\phi), \quad (8)$$

where  $\Sigma_{\text{id}}^{(H)}$  is the covariance matrix of ideal homodyne measurement,  $R(\phi) = \begin{pmatrix} \cos \phi & -\sin \phi \\ \sin \phi & \cos \phi \end{pmatrix}$  is the rotation matrix;  $\sigma_N$  is the excess noise variance that accounts for asymmetry effects is given by

$$\sigma_N = \sigma_x - 1. \quad (9)$$

For double homodyne detection,  $Q$  symbol is given by

$$P_G^{(\text{DH})}(x_1, x_2) = \frac{1}{2\pi\sqrt{\sigma_G^{(1)}\sigma_G^{(2)}}} \exp\left[-\frac{(x_1 - \operatorname{Re} \alpha e^{-i\phi})^2}{\sigma_1} - \frac{(x_2 - \operatorname{Im} \alpha e^{-i\phi})^2}{\sigma_2}\right], \quad (10)$$

$$\sigma_G^{(i)} = (\eta_1^{(i)} S_i^2 + \eta_2^{(i)} C_i^2) |\alpha_L^{(i)}|^2, \quad \alpha_L^{(1)} = C_L \alpha_L, \quad \alpha_L^{(2)} = -i S_L \alpha_L, \quad (11)$$

where  $\sigma_G^{(i)}$  is the variance of the photon count difference before rescaling and  $x_i$  are the quadrature variables given by

$$x_1 = \frac{1}{2(\eta_1^{(1)} + \eta_2^{(1)})C_1 S_1 C_S} \left\{ \frac{\mu_1}{|\alpha_L^{(1)}|} - (\eta_1^{(1)} S_1^2 - \eta_2^{(1)} C_1^2) |\alpha_L^{(1)}| \right\}, \quad (12)$$

$$x_2 = \frac{1}{2(\eta_1^{(2)} + \eta_2^{(2)})C_2 S_2 S_S} \left\{ \frac{\mu_2}{|\alpha_L^{(2)}|} - (\eta_1^{(2)} S_2^2 - \eta_2^{(2)} C_2^2) |\alpha_L^{(2)}| \right\}, \quad (13)$$

and relations

$$\sigma_1 = \frac{\sigma_x^{(1)}}{2C_S^2}, \quad \sigma_2 = \frac{\sigma_x^{(2)}}{2S_S^2}, \quad (14)$$

$$\sigma_x^{(i)} = \frac{\eta_1^{(i)} S_i^2 + \eta_2^{(i)} C_i^2}{[(\eta_1^{(i)} + \eta_2^{(i)})C_i S_i]^2} \quad (15)$$

give the quadrature variances  $\sigma_1$  and  $\sigma_2$ .

Following the same procedure used to derive Eq. (7), we obtain the covariance matrix of the double homodyne POVM,

$$\Sigma_m^{(\text{DH})} = R(\phi) \operatorname{diag}(\delta_1, \delta_2) R^T(\phi), \quad (16)$$

$$\delta_i = 2\sigma_i - 1. \quad (17)$$

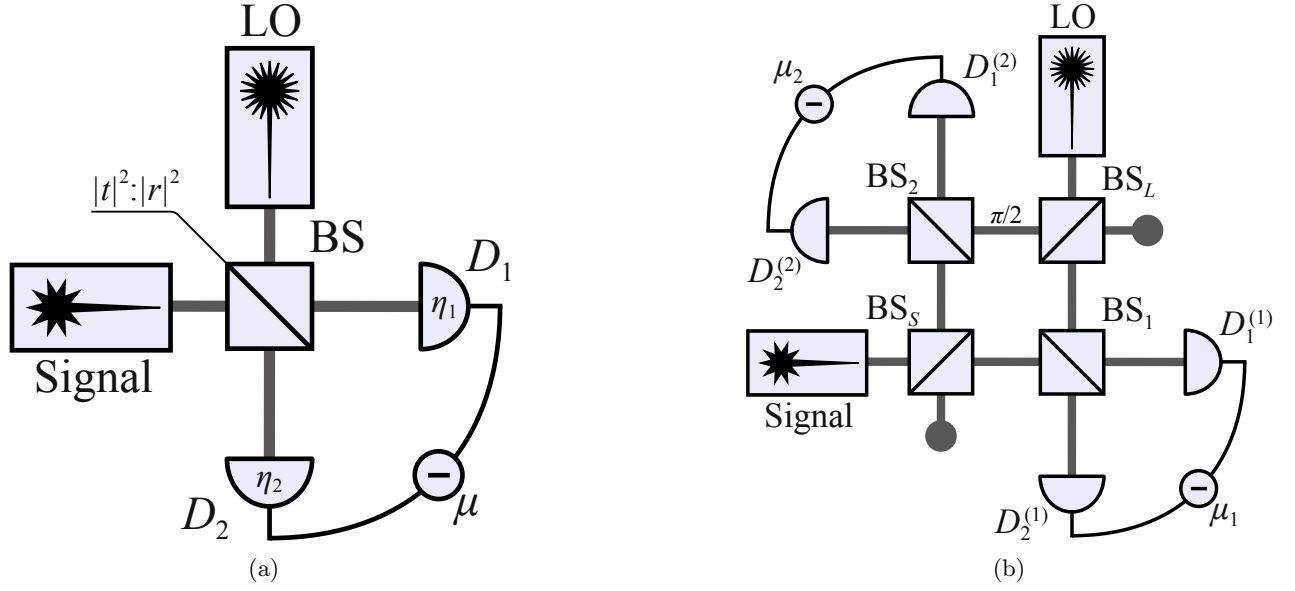


Figure 1: (a) Scheme of homodyne receiver. S (LO) is the source of signal (reference) mode, BS is the beam splitter with transmission and reflection coefficients  $C$  and  $S$ , respectively; photodetectors  $D_1$  and  $D_2$  have quantum efficiencies  $\eta_1$  and  $\eta_2$ , and  $\mu = m_1 - m_2$  is the photon count difference. (b) Scheme of double-homodyne receiver. S (LO) is the source of signal (reference) mode,  $BS_S$  ( $BS_L$ ) is the signal mode (local oscillator) beam splitter;  $\pi/2$  is the quarter wave phase shifter;  $BS_i$  is the beam splitter of  $i$ th homodyne;  $D_{1,2}^{(i)}$  are the photodetectors of the  $i$ th homodyne; and  $\mu_i = m_1^{(i)} - m_2^{(i)}$  is the photon count difference registered by the detectors of  $i$ th homodyne.

The POVM that describes ideal double-homodyne measurements uses the set of squeezed states,

$$|z, r, \phi\rangle = \hat{R}(\phi) \hat{D}(z) \hat{S}(r) |0\rangle = \hat{D}(ze^{i\phi}) \hat{S}(re^{2i\phi}) |0\rangle, \quad (18)$$

where  $z$  is the coherent state amplitude,  $r$  is real-valued squeezing parameter, and  $\phi$  is squeezing phase,  $\hat{D}(z) = e^{z\hat{a}^\dagger - z^*\hat{a}}$  is the displacement operator, and  $\hat{S}(r) = e^{\frac{1}{2}(r\hat{a}^{\dagger 2} - r^*\hat{a}^2)}$  is the squeezing operator.

The covariance matrix of squeezed states reads

$$\Sigma_{\text{id}}^{(\text{DH})} = R(\phi) \begin{pmatrix} e^{2r} & 0 \\ 0 & e^{-2r} \end{pmatrix} R^T(\phi). \quad (19)$$

An important point is that, for the difference between covariance matrices of noisy and ideal double-homodyne measurements, given by Eq. (16) and Eq. (19) respectively, is positive semi-definite, the squeezing parameter  $r$  must be ranged in the interval defined by parameters of the scheme (see Ref. [29])

$$r \in [r_2, r_1], \quad r_1 = \ln \delta_1^{1/2}, \quad r_2 = \ln \delta_2^{-1/2}. \quad (20)$$

### III. GAUSSIAN CHANNELS MODELING IMPERFECT MEASUREMENTS

For arbitrary state  $\hat{\rho}$  and POVM  $\hat{\Pi}^{(x)}$ , the outcome probability is [26]

$$p(x|\hat{\rho}) = \text{Tr} \left( \hat{\rho} \hat{\Pi}^{(x)} \right). \quad (21)$$

The measurement statistics of Gaussian states with noisy Gaussian measurements can be calculated by applying the noise map  $\mathcal{C}$  to  $\rho_G$ , or the dual map  $\mathcal{C}^*$  to the ideal POVM  $\hat{\Pi}_{\text{id}}$  [12, 27], i.e.

$$p(x|\hat{\rho}_G) = \text{Tr} \left\{ \mathcal{C}(\hat{\rho}_G) \hat{\Pi}_{\text{id}}^{(x)} \right\} = \text{Tr} \left\{ \hat{\rho}_G \mathcal{C}^* \left( \hat{\Pi}_{\text{id}}^{(x)} \right) \right\}. \quad (22)$$

An important property is that the same measurement statistics can be described by different Gaussian channels  $\mathcal{C}$ , provided their dual maps  $\mathcal{C}^*$  yield the same covariance matrix. While the first moments will differ, it is not as crucial due to being able to rescale them.

Note that, as measurements are specified to be Gaussian, the channels  $\mathcal{C}$  and  $\mathcal{C}^*$  will be Gaussian as well. It follows that the channel  $\mathcal{C}$  is fully characterized by matrices  $X_{\mathcal{C}}$  and  $Y_{\mathcal{C}}$ , transforming the first and second moments of Gaussian state  $\rho_G$ ,  $\mathbf{r}_G$  and  $\Sigma_G$  respectively, as follows [45]

$$\begin{aligned}\mathbf{r}_G &\mapsto X_{\mathcal{C}}\mathbf{r}_G, \\ \Sigma_G &\mapsto X_{\mathcal{C}}\Sigma_G X_{\mathcal{C}}^T + Y_{\mathcal{C}}.\end{aligned}\tag{23}$$

The dual channel  $\mathcal{C}^*$  transforming the first and second moments as follows

$$\begin{aligned}\mathbf{r}_G &\mapsto X_{\mathcal{C}}^{-1}\mathbf{r}_G, \\ \Sigma_G &\mapsto X_{\mathcal{C}}^{-1}\Sigma_G (X_{\mathcal{C}}^{-1})^T + X_{\mathcal{C}}^{-1}Y_{\mathcal{C}} (X_{\mathcal{C}}^{-1})^T.\end{aligned}\tag{24}$$

In what follows, we will consider two distinct quantum channels to describe the imperfect measurements, namely additive-noise channel and attenuator channel. In accordance with Eq. (22), channel  $\mathcal{C}$  will be defined in a way that its' dual channel  $\mathcal{C}^*$  will transform the covariance matrix of ideal measurement  $\Sigma_{\text{id}}$  into the covariance matrix of noisy Gaussian measurement  $\Sigma_m$ ,

$$\mathcal{C}^* : \quad \Sigma_{\text{id}}^{(\gamma)} \mapsto \Sigma_m^{(\gamma)}\tag{25}$$

#### A. Additive-noise channel

First, we consider additive-noise (classical mixing) channel [12]  $\Phi_{\gamma}$ , characterized by matrices

$$X_{\Phi}^{(\gamma)} = \mathbb{1}, \quad Y_{\Phi}^{(\gamma)} \geq 0, \quad \gamma \in \{\text{H}, \text{DH}\}.\tag{26}$$

This is a self-dual channel,  $\Phi_{\gamma}^* = \Phi_{\gamma}$ , that does not affect the first moment and changes the second moment as follows

$$\Phi_{\gamma} : \Sigma \mapsto \Sigma + Y_{\Phi}^{(\gamma)}.\tag{27}$$

To find matrices  $Y_{\Phi}^{(\gamma)}$  so that (see Eq. (25))

$$\Phi_{\gamma} : \quad \Sigma_{\text{id}}^{(\gamma)} \mapsto \Sigma_m^{(\gamma)} = \Sigma_{\text{id}}^{(\gamma)} + Y_{\Phi}^{(\gamma)},\tag{28}$$

we need to find the difference between covariance matrices of noisy and ideal measurements, i.e.

$$Y_{\Phi}^{(\gamma)} = \Sigma_m^{(\gamma)} - \Sigma_{\text{id}}^{(\gamma)} \equiv \Sigma_N^{(\gamma)},\tag{29}$$

where we defined the covariance matrix of excess noise  $\Sigma_N^{(\gamma)}$ .

For homodyne detection, from Eq. (8) and (7), we have

$$\Sigma_N^{(\text{H})} = \Sigma_m^{(\text{H})} - \Sigma_{\text{id}}^{(\text{H})} = R(\phi)\text{diag}(\sigma_N, 0)R^T(\phi) \geq 0,\tag{30}$$

where  $\sigma_N$  is given by Eq. (9).

For double homodyne detection, from Eq. (16) and (19), we have

$$\Sigma_N^{(\text{DH})}(r) = \Sigma_m^{(\text{DH})} - \Sigma_{\text{id}}^{(\text{DH})} = R(\phi) \begin{pmatrix} \sigma_N^{(1)}(r) & 0 \\ 0 & \sigma_N^{(2)}(r) \end{pmatrix} R^T(\phi) \geq 0,\tag{31}$$

$$\sigma_N^{(1)}(r) = \delta_1 - e^{2r}, \quad \sigma_N^{(2)}(r) = \delta_2 - e^{-2r}.\tag{32}$$

Note that the elements of  $\Sigma_N^{(\text{DH})}$  are dependent on squeezing parameter that lies in the interval (20). When  $r \in [r_2, r_1]$ , it is certain that the covariance matrix of excess noise is positive semi-definite,  $\Sigma_N^{(\text{DH})}(r) \geq 0$ .

### B. Attenuator channel

We shall move on to the attenuator channel  $\mathcal{E}_\gamma$ , characterized by matrices [12]

$$X_{\mathcal{E}}^{(\gamma)} = \cos \theta_\gamma \mathbb{1}, \quad Y_{\mathcal{E}}^{(\gamma)} = \sin^2 \theta_\gamma \Sigma_{\text{env}}^{(\gamma)}, \quad \gamma \in \{\text{H}, \text{DH}\}, \quad (33)$$

where  $\Sigma_{\text{env}}^{(\gamma)}$  is the covariance matrix of the state describing the environment.

Using Eq. (25) together with Eq. (23), we construct the dual channel  $\mathcal{E}_N^{*(\gamma)}$  so that it transforms the POVM of the ideal measurement into the POVM of the noisy measurements by changing the covariance matrix  $\Sigma_{\text{id}}^{(\gamma)}$  into  $\Sigma_m^{(\gamma)}$  as follows

$$\mathcal{E}_\gamma^*: \quad \Sigma_{\text{id}}^{(\gamma)} \mapsto \Sigma_m^{(\gamma)} = \frac{1}{\cos^2 \theta_\gamma} \Sigma_{\text{id}}^{(\gamma)} + \tan^2 \theta_\gamma \Sigma_{\text{env}}^{(\gamma)}, \quad \gamma \in \{\text{H}, \text{DH}\}. \quad (34)$$

First, we will consider homodyne detection. If the environment is described by vacuum, i.e.

$$\Sigma_{\text{env}}^{(\text{H})} = \mathbb{1}, \quad (35)$$

together with from matrices of ideal (8) and noisy (7) measurements, Eq. (34) takes the form

$$\Sigma_m^{(\text{H})} = \lim_{r \rightarrow +\infty} R(\phi) \text{diag}(e^{-2r} + \sigma_N, e^{2r}) R^T(\phi) = \lim_{r \rightarrow +\infty} \left\{ \frac{1}{\cos^2 \theta_{\text{H}}} R(\phi) \text{diag}(e^{-2r}, e^{2r}) R^T(\phi) + \tan^2 \theta_{\text{H}} \mathbb{1} \right\} \quad (36)$$

due to the limit  $r \rightarrow \infty$ , we may write

$$\frac{1}{\cos^2 \theta} \Sigma_{\text{id}}^{(\text{H})} \sim \Sigma_{\text{id}}^{(\text{H})}, \quad e^{2r} + \text{const} \sim e^{2r}, \quad (37)$$

it is sufficient to solve for  $\tan^2 \theta_{\text{H}}$ , i.e.

$$\tan^2 \theta_{\text{H}} = \sigma_N, \quad (38)$$

where  $\sigma_N$  is defined by Eq. (9). Then,  $\cos^2 \theta_{\text{H}}$  and  $\sin^2 \theta_{\text{H}}$  are given by

$$\cos^2 \theta_{\text{H}} = \frac{1}{\sigma_x}, \quad \sin^2 \theta_{\text{H}} = \frac{\sigma_N}{\sigma_x}. \quad (39)$$

For double-homodyne detection with  $\delta_1 \neq \delta_2$ , the environmental state obtained below is generally anisotropic for an arbitrary admissible value of  $r$ , although it can be isotropic at a special value of  $r$ . In the attenuator channel model studied here, we restrict the environmental mode to a pure state with  $\det \Sigma_{\text{env}}^{(\text{DH})} = 1$ ,

$$\Sigma_{\text{env}}^{(\text{DH})} = R(\phi) \text{diag} \left( a, \frac{1}{a} \right) R^T(\phi), \quad a \geq 0. \quad (40)$$

Solving Eq. (34) for the case of double homodyne detection, (see Eq. (19), (16)),

$$\Sigma_m^{(\text{DH})} = R(\phi) \text{diag}(\delta_1, \delta_2) R^T(\phi) = R(\phi) \left\{ \frac{1}{\cos^2 \theta_{\text{DH}}} \text{diag}(e^{2r}, e^{-2r}) + \tan^2 \theta_{\text{DH}} \text{diag} \left( a, \frac{1}{a} \right) \right\} R^T(\phi), \quad (41)$$

$$\begin{cases} \delta_1 = \frac{e^{2r}}{\cos^2 \theta_{\text{DH}}} + \tan^2 \theta_{\text{DH}} a \\ \delta_2 = \frac{e^{-2r}}{\cos^2 \theta_{\text{DH}}} + \tan^2 \theta_{\text{DH}} a^{-1} \end{cases} \quad (42)$$

Solving the system yields

$$\cos^2 \theta_{\text{DH}}(r) = \frac{e^{2r} + a(r)}{\delta_1 + a(r)} = \frac{\delta_1 e^{-2r} + \delta_2 e^{2r} - 2}{\delta_1 \delta_2 - 1}, \quad (43)$$

$$a(r) = \frac{\delta_1 - e^{2r}}{\delta_2 e^{2r} - 1}. \quad (44)$$

Note that at the ends of the  $r$ -interval (20),  $r \rightarrow r_2$  or  $r \rightarrow r_1$ , either  $a(r)$  or  $1/a(r)$  tend to infinity, making the ancilla state (40) the eigenstate of the quadrature operator (4). By evaluating in this case the equations (42), i.e. resolving indeterminate form  $\tan^2 \theta_{\text{DH}} a(r)$  for  $r = r_2$  and  $\tan^2 \theta_{\text{DH}}/a(r)$  for  $r = r_1$ , because one of noise variances (32) would be 0, it can be seen that the effect of this channel would be the same as the effect of the additive-noise channel (28) modeling double homodyne detection with the same  $r$ . This fact will be used in numerical calculations (see next section and Fig. 3).

#### IV. GAUSSIAN-MODULATED COHERENT-STATE PROTOCOL

In the Gaussian-modulated coherent-state (GMCS) protocol, Alice samples the complex amplitude  $\alpha = \alpha_1 + i\alpha_2$  from the Gaussian prior:

$$p_A(\alpha) = \frac{1}{\pi V_A} \exp \left[ -\frac{|\alpha|^2}{2V_A} \right]. \quad (45)$$

She then prepares the coherent state  $|\alpha\rangle$ . The states pass the composite Gaussian channel  $\mathcal{N}_{A \rightarrow B} = \mathcal{L}_N \circ \mathcal{L}_{T_{\text{ch}}}$ , where index indicates pure loss channel transmission coefficient,  $T_{\text{ch}}$  is the channel transmittance,  $N = 1 + \xi_{\text{ch}}/(1 - T_{\text{ch}})$ , and  $\xi_{\text{ch}}$  is the channel excess noise. Then, the receiver uses either homodyne or double-homodyne detection to measure the states. Mutual information between legitimate parties in each case is then given by the following expressions (see Ref. [29] for derivation)

$$I_{\text{AB}}^{(\text{H})} = \frac{1}{2} \log \left[ 1 + \frac{4T_{\text{ch}}V_A}{\sigma_x + \xi_{\text{ch}}} \right], \quad (46)$$

$$I_{\text{AB}}^{(\text{DH})} = \frac{1}{2} \sum_i \log \left[ 1 + \frac{4T_{\text{ch}}V_A}{2\sigma_i + \xi_{\text{ch}}} \right], \quad (47)$$

where  $\sigma_x$  and  $\sigma_i$  given by Eqs. (6) and (15), respectively, and upper indices hereinafter stand for homodyne and double-homodyne detection.

The covariance matrix of TMSV state with the Bob's mode transmitted through the noisy channel reads (see Ref. [32])

$$\mathcal{I}_A \otimes \mathcal{L}_N \circ \mathcal{L}_{T_{\text{ch}}} : \Sigma_{\text{TMSV}} = \begin{pmatrix} V\mathbb{1} & \sqrt{V^2 - 1}\sigma_z \\ \sqrt{V^2 - 1}\sigma_z & V\mathbb{1} \end{pmatrix} \mapsto \Sigma_{\text{AB}} = \begin{pmatrix} V\mathbb{1} & c\sigma_z \\ c\sigma_z & V_B\mathbb{1} \end{pmatrix}, \quad (48)$$

where  $\mathcal{I}_A$  is the identity channel acting on the subsystem  $A$  and the parameters of the covariance matrix  $\Sigma_{\text{AB}}$  are given by

$$V = 1 + 4V_A, \quad c = \sqrt{T_{\text{ch}}(V^2 - 1)}, \quad (49)$$

$$V_B = T_{\text{ch}}(V - 1) + 1 + \xi_{\text{ch}}. \quad (50)$$

We consider local action of either attenuator channel  $\mathcal{E}_\gamma$  (33) or additive-noise channel  $\Phi_\gamma$  (26), on second mode of TMSVS shared by Alice and Bob (48). In both cases, mutual information is given by  $I_{\text{AB}}^{(\gamma)}$  (46), (47), as it is classical.

It follows that

$$\mathcal{I}_A \otimes \mathcal{E}_\gamma : \Sigma_{\text{AB}} \mapsto \Sigma_{\text{AB}}^{(\mathcal{E}_\gamma)} = \begin{pmatrix} V\mathbb{1} & c \cos \theta_\gamma \sigma_z \\ c \cos \theta_\gamma \sigma_z & \cos^2 \theta_\gamma (V_B + \tan^2 \theta_\gamma \Sigma_{\text{env}}^{(\gamma)}) \end{pmatrix}, \quad (51)$$

$$\mathcal{I}_A \otimes \Phi_N^{(\gamma)} : \Sigma_{\text{AB}} \mapsto \Sigma_{\text{AB}}^{(\Phi_\gamma)} = \begin{pmatrix} V\mathbb{1} & c\sigma_z \\ c\sigma_z & V_B\mathbb{1} + \Sigma_N^{(\gamma)} \end{pmatrix}, \quad \gamma \in \{\text{H}, \text{DH}\}. \quad (52)$$

When the channel  $\mathcal{C}_\gamma \in \{\Phi_\gamma, \mathcal{E}_\gamma\}$  is under control of the eavesdropper, Eve holds a purification of the state  $\hat{\rho}_{\text{AB}}^{(\mathcal{C}_\gamma)} = \mathcal{I}_A \otimes \mathcal{C}_\gamma(\hat{\rho}_{\text{AB}})$  and the measurements performed by the receiver are assumed to be noiseless. In this scenario, the difference between the joint and conditional entropies

$$\chi_{\text{EB}}^{(\mathcal{C}_\gamma)} = S_{\text{E}} - S_{\text{E}|\text{B}} = S_{\text{AB}}^{(\mathcal{C}_\gamma)} - S_{\text{A}|\text{B}}^{(\mathcal{C}_\gamma)}, \quad \mathcal{C}_\gamma \in \{\Phi_\gamma, \mathcal{E}_\gamma\} \quad (53)$$

gives the Holevo information. The joint entropy

$$S_{\text{AB}}^{(\mathcal{C}_\gamma)} = g(\nu_1^{(\mathcal{C}_\gamma)}) + g(\nu_2^{(\mathcal{C}_\gamma)}), \quad (54)$$

$$g(\nu) = \frac{\nu + 1}{2} \log \frac{\nu + 1}{2} - \frac{\nu - 1}{2} \log \frac{\nu - 1}{2}$$

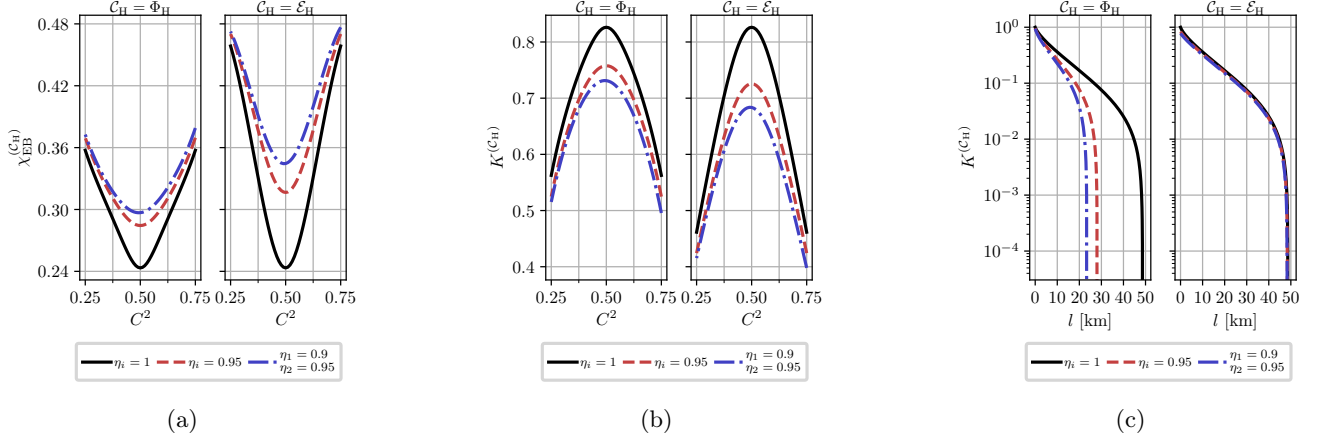


Figure 2: (a) Holevo information,  $\chi_{EB}^{(C_H)}$  and (b) asymptotic secret fraction,  $K^{(C_H)}$ , as a function of the beam splitter transmission,  $C^2$ , of the homodyne receiver computed at different values of the detector efficiencies for additive-noise and attenuator channel models, as indicated in panel title. The parameters are:  $V = 5$ ;  $T_{ch} = 0.95$ ;  $\xi_{ch} = 10^{-2}$ ; and  $\beta = 0.95$ . (c)  $K^{(C_H)}$  versus transmission length  $l$  for additive-noise and attenuator channel models. The parameters are:  $V = 5$ ;  $\beta = 0.95$ ;  $\xi_{ch} = 10^{-2}$ ; losses are 20 dB per 100 km.

then can be expressed in terms of the symplectic eigenvalues of the covariance matrix (52) given by

$$\nu_{1,2}^{(C_\gamma)} = \sqrt{\Delta_{C_\gamma}/2 \pm \sqrt{\Delta_{C_\gamma}^2/4 - D_{C_\gamma}}}, \quad D_{C_\gamma} = \det \Sigma_{AB}^{(C_\gamma)}, \quad (55)$$

$$\Delta_{C_\gamma} = \det([\Sigma_{AB}^{(C_\gamma)}]_{11}) + \det([\Sigma_{AB}^{(C_\gamma)}]_{22}) + 2 \det([\Sigma_{AB}^{(C_\gamma)}]_{12}), \quad (56)$$

where  $[\Sigma_{AB}^{(C_\gamma)}]_{ii}$  ( $[\Sigma_{AB}^{(C_\gamma)}]_{ij}$ ) are diagonal (off-diagonal) blocks of  $\Sigma_{AB}^{(C_\gamma)}$ .

Conditional entropies  $S_{E|B} = S_{A|B}^{(\gamma)}$  are calculated from respective conditional covariance matrices,

$$S_{A|B}^{(\gamma)} = g(\nu_3^{(\gamma)}), \quad \nu_3^{(\gamma)} = \sqrt{\det \Sigma_{A|B}^{(\gamma)}}, \quad (57)$$

$$\Sigma_{A|B}^{(\gamma)} = V \mathbb{1} - c^2 \sigma_z (V_B \mathbb{1} + \Sigma_m^{(\gamma)})^{-1} \sigma_z. \quad (58)$$

Direct computations show that these conditional matrices and therefore their symplectic eigenvalues are independent on channel model. Symplectic eigenvalues are given by

$$\nu_3^{(H)} = \sqrt{V \left( V - \frac{c^2}{V_B + \sigma_N} \right)}, \quad (59)$$

$$\nu_3^{(DH)} = V \sqrt{\frac{(V_B + \delta_1 - \frac{c^2}{V})(V_B + \delta_2 - \frac{c^2}{V})}{(V_B + \delta_1)(V_B + \delta_2)}}, \quad (60)$$

From mutual information and Holevo information evaluation of the asymptotic secret fraction is done per Devetak-Winter formula [46]

$$K^{(C_\gamma)} = \beta I_{AB}^{(C_\gamma)} - \chi_{EB}^{(C_\gamma)}, \quad \gamma \in \{H, DH\}, C_\gamma \in \{\Phi_\gamma, \mathcal{E}_\gamma\}. \quad (61)$$

As symplectic eigenvalues for additive-noise channel are calculated per formulas Eq. (55) and do not allow for simplification, in the following sections we focus only on analytic expressions for symplectic eigenvalues for attenuator channel model.



### A. Homodyne detection

For attenuator channel, from Eq. (51) and (39) we have

$$\Sigma_{AB}^{(\mathcal{E}_H)} = \begin{pmatrix} V\mathbb{1} & \frac{c}{\sqrt{\sigma_x}}\sigma_z \\ \frac{c}{\sqrt{\sigma_x}}\sigma_z & \frac{1}{\sigma_x}(V_B + \sigma_N)\mathbb{1} \end{pmatrix} \equiv \begin{pmatrix} V\mathbb{1} & \tilde{c}\sigma_z \\ \tilde{c}\sigma_z & \tilde{V}_B\mathbb{1} \end{pmatrix}, \quad (62)$$

$$\tilde{V}_B \equiv T(V - 1) + 1 + \xi, \quad (63)$$

$$\tilde{c} \equiv \sqrt{T(V^2 - 1)}, \quad (64)$$

where we defined scaled Bob's variance and scaled correlations between Alice and Bob  $\tilde{V}_B$  and  $\tilde{c}$ , using total channel transmission  $T$  that consists of channel transmission  $T_{\text{ch}}$  and detection losses  $\frac{1}{\sigma_x}$ , as well as scaled noise variance  $\xi$ ,

$$T = T_{\text{ch}} \cdot \frac{1}{\sigma_x}, \quad (65a)$$

$$\xi \equiv \xi_{\text{ch}} \cdot \frac{1}{\sigma_x}. \quad (65b)$$

It follows that for homodyne detection the effect of measurement asymmetry is equivalent to scaling both channel transmission (65a) and channel noise (65b) by a factor of  $\sigma_x^{-1}$ .

Symplectic eigenvalues of  $\Sigma_{AB}^{(\mathcal{E}_H)}$ ,  $\nu_{1,2}^{(\mathcal{E}_H)}$ , can be computed using formulas [45]:

$$\nu_{1,2}^{(\mathcal{E}_H)} = \frac{z \pm [\tilde{V}_B - V]}{2}, \quad z = \sqrt{(V + \tilde{V}_B)^2 - 4\tilde{c}^2}, \quad (66)$$

and then substituted in Eq. (54) to calculate joint entropy  $S_{AB}^{(\mathcal{E}_H)}$ .

Fig. 2 illustrates the effects of homodyne measurement asymmetry on Holevo information (53) and asymptotic secret fraction (61) versus beam splitter transmission  $C^2$ , as well as secret fraction versus transmission length, for both additive-noise (52) and attenuator (51) channels. While channel noise is reduced in this setup (65b), so is channel transmission (65a), and, since transmission is scaled by modulation variance  $V \gg 1$  in every expression, as well as reduced mutual information with greater asymmetry per Eq. (46), attenuator channel has negative effect. As shown in Fig. 2a and 2b, the attenuator channel results in higher Holevo information, and thus lower secret fraction, at high transmission for fixed asymmetry parameters. However, Fig. 2c reveals that the attenuator channel achieves significantly greater reach (maximum transmission length at which a positive key rate is obtained) than the additive-noise channel.

### B. Double-homodyne detection

For attenuator channel, from Eq. (51) and (43) we have

$$\Sigma_{AB}^{(\mathcal{E}_{\text{DH}})} = \begin{pmatrix} V\mathbb{1} & c \cos \theta_{\text{DH}} \sigma_z & \cos^2 \theta_{\text{DH}} \left( V_B + \delta_1 - \frac{e^{2r}}{\cos^2 \theta_{\text{DH}}} \right) & 0 \\ c \cos \theta_{\text{DH}} \sigma_z & \cos^2 \theta_{\text{DH}} \left( V_B + \delta_2 - \frac{e^{-2r}}{\cos^2 \theta_{\text{DH}}} \right) & 0 & \cos^2 \theta_{\text{DH}} \left( V_B + \delta_2 - \frac{e^{-2r}}{\cos^2 \theta_{\text{DH}}} \right) \end{pmatrix} \quad (67)$$

Symplectic eigenvalues of this matrix can be calculated using invariants similarly to Eq. (55). It is obvious that these symplectic eigenvalues, and thereby joint entropy, is explicitly depended on squeezing parameter  $r$  (20), like in the case of additive-noise channel (see Ref. [29]).

Fig. 3 illustrates dependence of Holevo information on the squeezing parameter, for both additive-noise and attenuator channels. Referring to Fig. 3, in the limiting case of ideal double-homodyne detection with  $\delta_1 = \delta_2 = 1$ , only one value of  $r = 0$  is allowed (see Ref. [29]), with equal values of Holevo information for both channels (black dot on plot).

When  $\delta_1 = \delta_2 > 1$ , dependence of Holevo information on squeezing parameter is symmetrical around  $r = 0$  for both channels. For additive-noise channel,  $r = 0$  is the point of maximal Holevo information, while for attenuator channel  $r = 0$  corresponds to minimal Holevo information. Moreover, while Holevo information is undefined at  $r = r_{2,1}$  (see Eq. (43)), the values tend to the same values of joint entropy in the case of additive-noise channel, as signified by color-matched white-filled dots in Fig. 3.

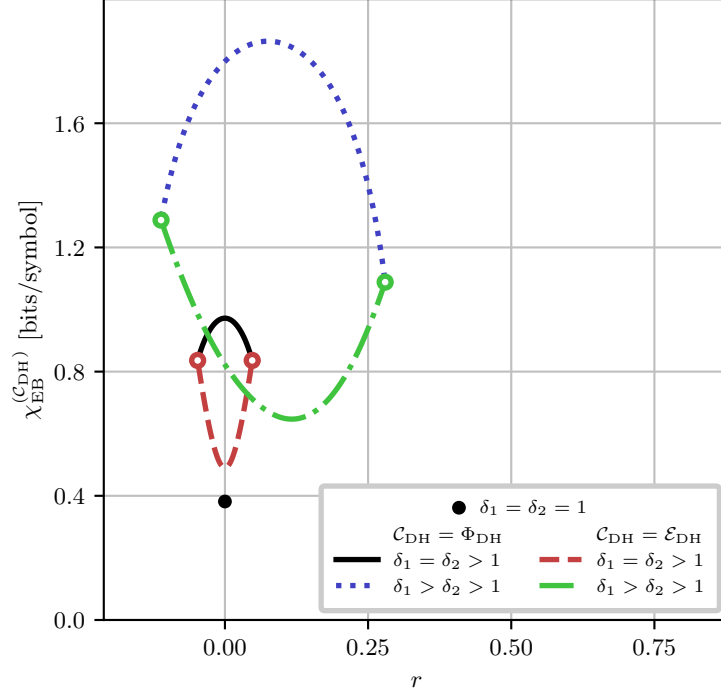


Figure 3: Holevo information,  $\chi_{\text{EB}}^{(\text{DH}; C_{\text{DH}})}$ , as a function of the squeezing parameter  $r$  at different values of  $\delta_{1,2}$ . Black dot corresponds to the case of perfect measurements. Solid and dashdotted curves correspond to additive-noise channel model, while dashed and dotted curves are for attenuator channel model. Color-matched white-filled dots mark points where Holevo information is undefined at the boundaries of the  $r$  interval (20) (see Eq. (44) and main text). Values of  $\delta_{1,2}$  are:  $\delta_{1,2} = 1.1$  for solid and dashed curves,  $\delta_1 = 1.75, \delta_2 = 1.25$  for dashdotted and dotted curves. The channel parameters are:  $V = 5$ ;  $T_{\text{ch}} = 0.95$ ; and  $\xi_{\text{ch}} = 10^{-2}$ .

For the asymmetric parameter sets considered, where  $\delta_1 \neq \delta_2$ , the Holevo information for both channel models becomes asymmetric about its extrema, resulting in unequal joint entropies at  $r = r_{2,1}$ . For these parameter sets, the Holevo information is concave in  $r$  for the additive-noise channel and convex in  $r$  for the attenuator channel.

Fig. 4 illustrates lower and upper bounds of the asymptotic secret fraction versus transmission length, for both additive-noise (52) and attenuator (51) channels. Note that for chosen  $\sigma_x^{(i)}$  lower bounds for both channels coincide, because for  $\sigma_x^{(i)} \approx 1$  maximum of joint entropy for both models is either at  $r = r_1$  or  $r = r_2$ . Moreover, the upper bound for additive-noise channel in Fig. 4a is very close (0.2 km difference) to the lower bound.

As seen from Fig. 4, difference between lower and upper bound of the asymptotic secret fraction is greater in

Fig. 5 illustrates the dependence of Holevo information (53) and asymptotic secret fraction (61) on the signal beam splitter transmission  $C_S^2$ , as well as secret fraction versus transmission length if the receiver uses double-homodyne detection, for both additive-noise (52) and attenuator (51) channels. Unlike the homodyne detection case (see Fig. 2), Holevo information is significantly lower for attenuator channel, except for the ideal measurements case ( $\eta_{1,2}^{(1,2)} = 1$  and whole  $C_S^2$  axis, unlike in homodyne case where ideal measurements are strictly  $\eta_{1,2} = 1$  and  $C^2 = 0.5$ ) as both channels have no effect and thereby have equal joint entropies (black curve). High difference in Holevo information is due to the dependence of joint entropy on  $r$  (see Fig. 3) and fixing  $r = \frac{r_2 + r_1}{2}$  for both curves, effectively minimizing Holevo information for attenuator channel and maximizing it for additive-noise channel.

Analogously to the case of homodyne detection (see Fig. 2c), in the case of double-homodyne detection the attenuator channel has greater reach than the additive-noise channel, as illustrated by Fig. 5c.

## V. DISCUSSION AND CONCLUSION

In this paper, we have constructed and compared additive-noise and attenuator channel representations of noisy homodyne and double-homodyne measurements affected by receiver asymmetry. Our approach requires the dual of

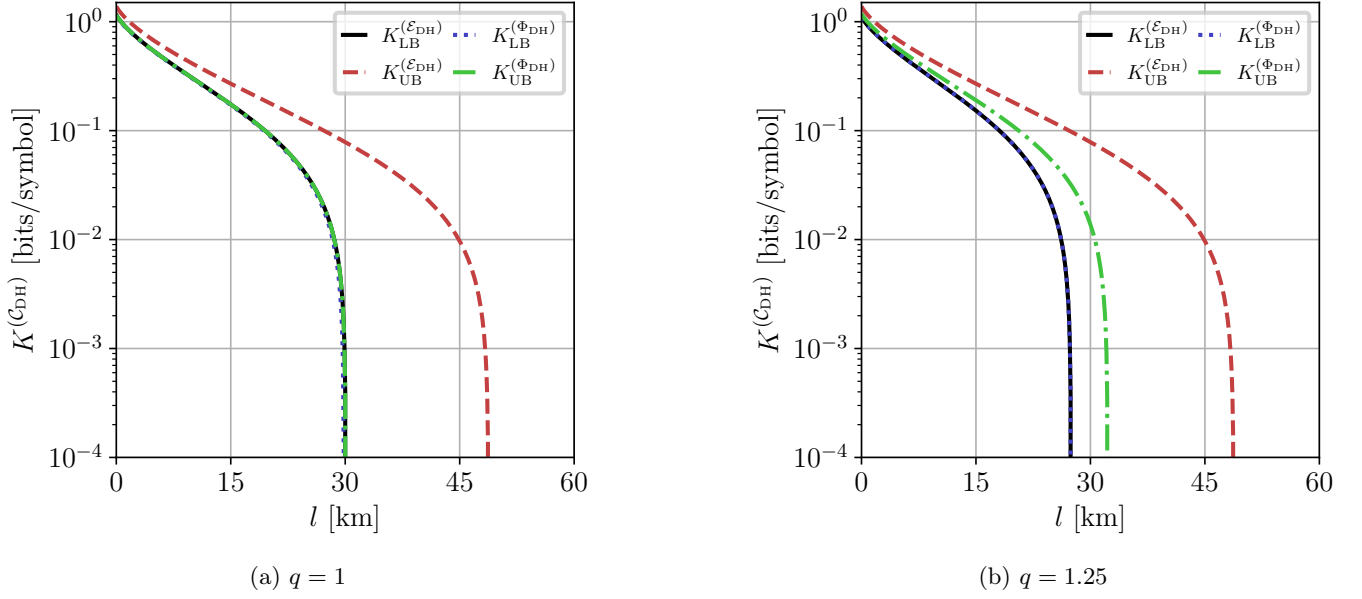


Figure 4: Asymptotic secret fraction  $K^{(C_{DH})}$  versus channel length  $l$ , computed for fixed  $\sigma_x^{(i)} = 1.05$  (see Eq.(15)) and various imbalance ratios  $q \equiv \frac{S_S^2}{C_S^2}$  for additive-noise and attenuator channel models (see Fig. 3). The parameters are:  $V = 5$ ;  $\beta = 0.95$ ;  $\xi_{ch} = 10^{-2}$ ; the fiber loss is 20 dB per 100 km.

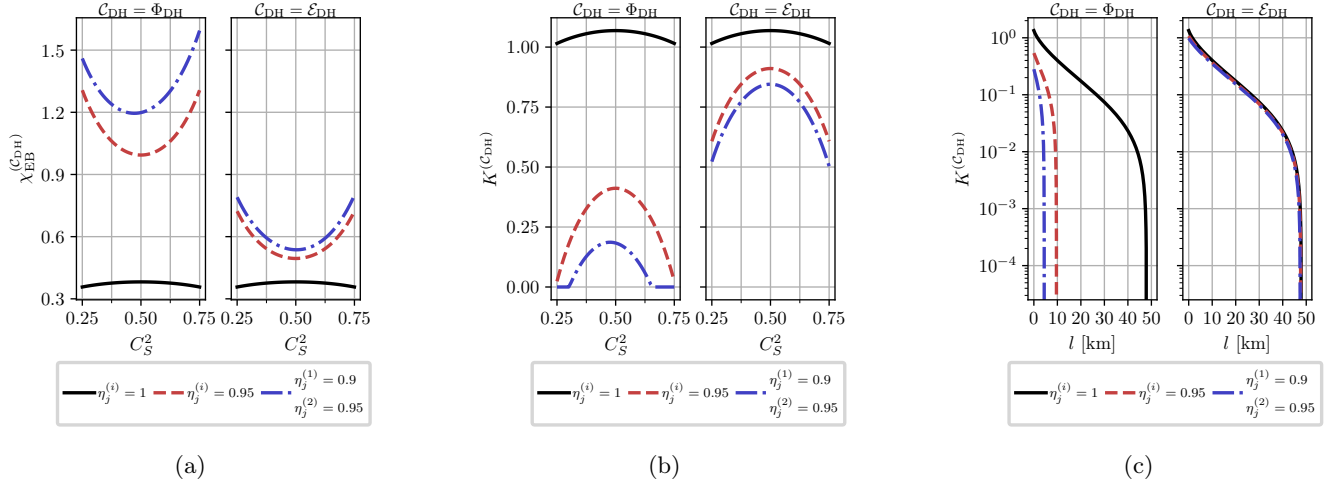


Figure 5: (a) Holevo information,  $\chi_{EB}^{(C_{DH})}$  and (b) asymptotic secret fraction,  $K^{(C_{DH})}$ , as a function of the signal beam splitter transmission,  $C_S^2$ , of the double-homodyne receiver computed at different values of the detector efficiencies for additive-noise and attenuator channel models, as indicated in panel title. The parameters are:  $V = 5$ ;  $T_{ch} = 0.95$ ;  $\xi_{ch} = 10^{-2}$ ; and  $\beta = 0.95$ . (c)  $K^{(C_{DH})}$  versus transmission length  $l$  for additive-noise and attenuator channel models. The parameters are:  $V = 5$ ;  $\beta = 0.95$ ;  $\xi_{ch} = 10^{-2}$ ; losses are 20 dB per 100 km.. For both channel models  $r = \frac{r_2 + r_1}{2}$  (see main text).

the selected Gaussian channel, together with a deterministic invertible rescaling of the measurement outcomes, to reproduce the target noisy Gaussian measurement. At the level of covariance matrices, this condition is expressed by Eq. (25). It constrains the channel parameters, which are then determined by the receiver parameters and, for double-homodyne detection, by the squeezing parameter  $r$ .

After the deterministic invertible rescaling of the measurement outcomes, both channels reproduce the same conditional statistics of Bob's outcomes. They therefore give the same Alice-Bob mutual information. For fixed source and channel parameters, the conditional covariance matrix in Eq. (58), and hence the conditional entropy  $S_{A|B}^{(\gamma)}$ , are

the same for both channels because the detector imperfections enter the conditional state through the same noisy measurement. The difference between the security estimates originates from the joint state of Alice and Bob. The additive-noise and attenuator channels generally produce different joint covariance matrices and, consequently, different joint entropies. In the untrusted-detector model considered in this paper, the environmental output of the selected channel is assigned to Eve. The corresponding Holevo information (53) therefore depends on the selected channel even when Bob's observed statistics remain unchanged.

For homodyne detection, we take the environmental mode of the attenuator channel to be in the vacuum state, so that the detector imperfections are represented by a pure-loss channel. This channel rescales both the effective transmission and the output-referred excess noise by the same factor, as shown in Eq. (65).

The numerical results in Fig. 2 show that the additive-noise and attenuator channels give different security estimates. At high channel transmittance and for the parameters considered, the attenuator channel gives a larger Holevo information and a lower asymptotic secret fraction. At longer distances, however, the secret fraction remains positive up to a greater channel length than in the additive-noise channel. Therefore, neither channel can be described as strictly more or less pessimistic.

A distinguishing feature of double-homodyne detection is the nonuniqueness of the representation of its noisy POVM. The covariance matrix of the physical double-homodyne measurement is fixed by the receiver parameters and does not depend on the squeezing parameter  $r$ . The effects of the ideal Gaussian POVM are proportional to projectors onto displaced squeezed states and depend on  $r$ . The noisy POVM is obtained by applying the dual of the selected Gaussian channel to the ideal POVM, together with the outcome rescaling. The requirement that the excess-noise covariance matrix be positive semidefinite restricts  $r$  to the interval given by Eq. (20).

For the additive-noise channel, variation of  $r$  redistributes the measurement noise between the two conjugate quadratures according to Eq. (32). For the attenuator channel, the same variation changes both the attenuation coefficient and the covariance matrix of the environmental state, as described by Eqs. (43) and (44). In the attenuator channel considered here, the generally anisotropic measurement noise is reproduced by an environmental mode in an anisotropic Gaussian state, which was chosen to be pure.

At the boundaries of the admissible interval of the squeezing parameter  $r$ , one of the additive-noise quadrature variances vanishes. In the attenuator channel, the environmental state approaches an infinitely squeezed limit: one quadrature variance tends to zero, whereas the conjugate variance diverges. The boundary points are therefore understood as limiting channels in which the attenuator result approaches the corresponding additive-noise result.

Figure 3 shows that the Holevo information depends on  $r$  in qualitatively different ways for the two channel models. For the parameter sets considered, this dependence is concave for the additive-noise channel and convex for the attenuator channel. When the measurement noise is symmetric between the two quadratures, both curves are symmetric about  $r = 0$ . In this case, the coherent state, given by  $r = 0$ , maximizes the Holevo information for the additive-noise channel and minimizes it for the attenuator channel. For the asymmetric case considered, this symmetry is lost and the extrema are shifted away from  $r = 0$ .

The lower and upper secret-fraction curves in Fig. 4 describe the range obtained by varying  $r$  over its admissible interval for each channel model. For the near-ideal quadrature variances used in Fig. 4, the lower bounds of both channels nearly coincide because the Holevo-information maximum occurs at, or close to, the interval boundaries. The upper bounds become more clearly separated when the imbalance of the signal beam splitter is increased.

The comparison shown in Fig. 5 was performed at the midpoint of the admissible interval of  $r$ . In the symmetric case, this value coincides with the maximum of the additive-noise Holevo information and the minimum of the attenuator Holevo information. The pronounced separation between the secret fractions in Fig. 5 therefore reflects both the selected channel model and the selected squeezing parameter.

These results clarify the role of the chosen channel representation when receiver noise is treated as untrusted. Although the additive-noise and attenuator channels reproduce the same receiver statistics after outcome rescaling, they generally yield different joint states of Alice and Bob and different environmental outputs assigned to Eve. Choosing a particular channel representation therefore introduces a physical assumption about the coupling between the optical signal and the inaccessible degrees of freedom. A security estimate should not be based on a particular channel representation solely because it gives a larger secret fraction. The selected representation should either be justified from the physical structure of the receiver or the dependence of the estimate on the channels included in the analysis should be reported explicitly. The present comparison is restricted to the additive-noise channel and to attenuator channels whose environmental modes are in pure Gaussian states. Mixed environmental states and other Gaussian channel representations compatible with the same receiver statistics were not considered.

Appendix A extends the receiver model to include independent pure losses at the output ports of a lossless beam splitter. These losses can be incorporated into the effective photodetector efficiencies. By contrast, a general lossy asymmetric beam splitter with unequal complex transmission and reflection amplitudes does not, in general, preserve the simple quadrature form of the receiver response and cannot be included by merely replacing the detector efficiencies.

The security analysis was performed in the asymptotic limit for the GMCS CV-QKD protocol under collective

Gaussian attacks, with the modeled receiver imperfections treated within an untrusted-detector model. Trusted receiver noise, finite-size corrections, active detector attacks, and uncertainties in the calibration parameters require separate treatment. Within these assumptions, equivalent receiver statistics can lead to different estimates of Eve's information when different channel representations are used within the untrusted-detector model.

### ACKNOWLEDGEMENTS

The work was supported by the Russian Science Foundation (project No. [24-11-00398](#)).

### Appendix A: Lossy beam splitter

In this appendix, we show that applying independent pure loss channels at the output ports of a lossless beam splitter yields the exact same transformation as a single formally defined lossy beam splitter.

First, consider the case of homodyne detection. The lossless unbalanced beam splitter mixes the input signal mode  $\hat{a}$  and the local oscillator mode  $\hat{a}_L$ . This transformation is described by the unitary rotation matrix  $\mathbf{U}_{\text{BS}}$ ,

$$\begin{pmatrix} \hat{a}_1 \\ \hat{a}_2 \end{pmatrix} = \mathbf{U}_{\text{BS}} \begin{pmatrix} \hat{a} \\ \hat{a}_L \end{pmatrix} = \begin{pmatrix} C & S \\ -S & C \end{pmatrix} \begin{pmatrix} \hat{a} \\ \hat{a}_L \end{pmatrix} \\ = \begin{pmatrix} C\hat{a} + S\hat{a}_L \\ -S\hat{a} + C\hat{a}_L \end{pmatrix}, \quad (\text{A1})$$

where  $C$  and  $S$  are the transmission and reflection coefficients of the beam splitter BS, respectively.

We model the subsequent losses by passing each intermediate output mode  $\hat{a}_{1,2}$  through a virtual beam splitter of transmittance  $\tau_{1,2}$ . This mixes each signal with an independent environmental vacuum mode  $\hat{v}_{1,2}$ , where  $[\hat{v}_i, \hat{v}_j^\dagger] = \delta_{ij}$ ,

$$\begin{pmatrix} \hat{b}_1 \\ \hat{c}_1 \end{pmatrix} = \begin{pmatrix} \sqrt{\tau_1} & -\sqrt{1-\tau_1} \\ \sqrt{1-\tau_1} & \sqrt{\tau_1} \end{pmatrix} \begin{pmatrix} \hat{a}_1 \\ \hat{v}_1 \end{pmatrix}, \quad (\text{A2})$$

$$\begin{pmatrix} \hat{b}_2 \\ \hat{c}_2 \end{pmatrix} = \begin{pmatrix} \sqrt{\tau_2} & -\sqrt{1-\tau_2} \\ \sqrt{1-\tau_2} & \sqrt{\tau_2} \end{pmatrix} \begin{pmatrix} \hat{a}_2 \\ \hat{v}_2 \end{pmatrix}. \quad (\text{A3})$$

Tracing out the lost environmental modes  $\hat{c}_{1,2}$ , the remaining physical output modes  $\hat{b}_{1,2}$  expand to

$$\begin{pmatrix} \hat{b}_1 \\ \hat{b}_2 \end{pmatrix} = \begin{pmatrix} \sqrt{\tau_1}C & \sqrt{\tau_1}S \\ -\sqrt{\tau_2}S & \sqrt{\tau_2}C \end{pmatrix} \begin{pmatrix} \hat{a} \\ \hat{a}_L \end{pmatrix} + \begin{pmatrix} -\sqrt{1-\tau_1}\hat{v}_1 \\ -\sqrt{1-\tau_2}\hat{v}_2 \end{pmatrix}. \quad (\text{A4})$$

From Eq. (A4), we extract the effective scattering matrix  $\mathbf{T}_{\text{BS}}$  and the fluctuation noise operators  $\hat{F}_{1,2}$  representing the device excitations

$$\mathbf{T}_{\text{BS}} = \begin{pmatrix} \sqrt{\tau_1}C & \sqrt{\tau_1}S \\ -\sqrt{\tau_2}S & \sqrt{\tau_2}C \end{pmatrix}. \quad (\text{A5})$$

It is not difficult to show that to preserve the Canonical Commutation Relations for the output fields,  $[\hat{b}_i, \hat{b}_j^\dagger] = \delta_{ij}$ , the noise operators  $\hat{F}_{1,2}$  must satisfy

$$[\hat{F}_i, \hat{F}_j^\dagger] = \delta_{ij} - \sum_k T_{ik} T_{jk}^*, \quad (\text{A6})$$

where  $T_{ik}$  are the elements of the scattering matrix  $\mathbf{T}_{\text{BS}}$  (A5). Evaluating this constraint explicitly using the elements of  $\mathbf{T}_{\text{BS}}$  yields:

$$[\hat{F}_1, \hat{F}_1^\dagger] = 1 - \tau_1, \quad (\text{A7})$$

$$[\hat{F}_2, \hat{F}_2^\dagger] = 1 - \tau_2, \quad (\text{A8})$$

$$[\hat{F}_1, \hat{F}_2^\dagger] = 0, \quad (\text{A9})$$

which matches the commutators calculated from Eq. (A4).

We now connect this setup to the formal, standard mathematical treatment of lossy beam splitters [47, 48]. This framework models loss via an interaction matrix  $\mathbf{A}$  acting on ancillary modes, which must obey the positivity condition  $\mathbf{1} - \mathbf{A}\mathbf{A}^\dagger \geq 0$  to satisfy unitarity. Note that the extracted scattering matrix  $\mathbf{T}_{\text{BS}}$  (A5) can be factored into a product of a diagonal scaling matrix and the lossless unitary,

$$\begin{aligned}\mathbf{T}_{\text{BS}} &= \begin{pmatrix} \sqrt{\tau_1} & 0 \\ 0 & \sqrt{\tau_2} \end{pmatrix} \begin{pmatrix} C & S \\ -S & C \end{pmatrix} \\ &= \begin{pmatrix} \sqrt{\tau_1} & 0 \\ 0 & \sqrt{\tau_2} \end{pmatrix} \mathbf{U}_{\text{BS}}.\end{aligned}\quad (\text{A10})$$

By defining the positive semi-definite matrix representing the loss properties as  $\mathbf{A}\mathbf{A}^\dagger = \text{diag}(1 - \tau_1, 1 - \tau_2)$ , it follows that:

$$\sqrt{\mathbf{1} - \mathbf{A}\mathbf{A}^\dagger} = \begin{pmatrix} \sqrt{\tau_1} & 0 \\ 0 & \sqrt{\tau_2} \end{pmatrix}. \quad (\text{A11})$$

Substituting this back into Eq. (A10) yields the polar decomposition of the scattering matrix of a lossy beam splitter in its generalized form [48]:

$$\mathbf{T}_{\text{BS}} = \sqrt{\mathbf{1} - \mathbf{A}\mathbf{A}^\dagger} \mathbf{U}_{\text{BS}}. \quad (\text{A12})$$

Because the matrix  $\mathbf{A}\mathbf{A}^\dagger$  representing the losses is diagonal, it is straightforward to see that to account for lossy beam splitter in a homodyne setup it is sufficient to simply rescale the quantum efficiencies of detection:  $\eta_{1,2} \rightarrow \tau_{1,2}\eta_{1,2}$ . The same argument would apply in the case of double-homodyne detection.

We conclude this appendix by discussing the generalized (asymmetrical) beam splitter model where input ports of the beam splitter are characterized by different set of transmission and reflection coefficients. In this case, the non-unitary scattering matrix is written in the form [49]

$$\mathbf{S} = \begin{pmatrix} t & \rho \\ r & \tau \end{pmatrix}, \quad \mathbf{S}\mathbf{S}^\dagger \leq \mathbf{1}, \quad (\text{A13})$$

where  $t, \tau$  ( $r, \rho$ ) are complex transmission (reflection) coefficients. While it can be factored into lossy and unitary parts similarly to (A12), **this case cannot be covered by the formulas after some replacement, because it ruins quadrature representation:**

$$|\alpha, \alpha_L\rangle \mapsto |\alpha_1, \alpha_2\rangle, \quad (\text{A14})$$

$$\alpha_1 = t\alpha + \rho\alpha_L, \quad \alpha_2 = r\alpha + \tau\alpha_L, \quad (\text{A15})$$

$$\mathbf{P}_G(\mu) = G(\mu - \mu_G; \sigma_G), \quad (\text{A16})$$

$$\begin{aligned}\sigma_G &= \eta_1 |\alpha_1|^2 + \eta_2 |\alpha_2|^2 \\ &= (\eta_1 |\rho|^2 + \eta_2 |\tau|^2) |\alpha_L|^2 + (\eta_1 |t|^2 + \eta_2 |r|^2) |\alpha|^2 \\ &\quad + 2 \text{Re}[(\eta_1 t \rho^* + \eta_2 r \tau^*) \alpha \alpha_L^*] \\ &\approx (\eta_1 |\rho|^2 + \eta_2 |\tau|^2) |\alpha_L|^2 + 2 \text{Re}[(\eta_1 t \rho^* + \eta_2 r \tau^*) \alpha \alpha_L^*],\end{aligned}\quad (\text{A17})$$

$$\begin{aligned}\mu_G &= \eta_1 |\alpha_1|^2 - \eta_2 |\alpha_2|^2 \\ &= (\eta_1 |\rho|^2 - \eta_2 |\tau|^2) |\alpha_L|^2 + (\eta_1 |t|^2 - \eta_2 |r|^2) |\alpha|^2 \\ &\quad + 2 \text{Re}[(\eta_1 t \rho^* - \eta_2 r \tau^*) \alpha \alpha_L^*] \\ &\approx (\eta_1 |\rho|^2 - \eta_2 |\tau|^2) |\alpha_L|^2 + 2 \text{Re}[(\eta_1 t \rho^* - \eta_2 r \tau^*) \alpha \alpha_L^*].\end{aligned}\quad (\text{A18})$$

## Appendix B: Fluctuating Local Oscillator

In this Appendix, we extend the theoretical treatment of homodyne measurements to account for classical intensity fluctuations of the local oscillator (LO).

We start from the Gaussian approximation of the photon count difference probability distribution in homodyne scheme [29]

$$P_G(\mu) = G(\mu - \mu_G; \sigma_G), \quad (B1)$$

$$\sigma_G = \eta_1 |\alpha_1|^2 + \eta_2 |\alpha_2|^2 \approx (\eta_1 S^2 + \eta_2 C^2) |\alpha_L|^2, \quad (B2)$$

$$\mu_G = \eta_1 |\alpha_1|^2 - \eta_2 |\alpha_2|^2 \approx (\eta_1 S^2 - \eta_2 C^2) |\alpha_L|^2 + CS(\eta_1 + \eta_2) |\alpha_L| \langle \hat{x}_\phi \rangle, \quad (B3)$$

where

$$G(x; \sigma) \equiv \frac{1}{\sqrt{2\pi\sigma}} \exp\left(-\frac{x^2}{2\sigma}\right). \quad (B4)$$

We assume that the LO amplitude fluctuates around its mean value  $\alpha_L$  such that

$$\alpha_L = \alpha_L + \delta\alpha_L, \quad \delta\alpha_L \sim G(\delta\alpha_L, \sigma_L) \quad (B5)$$

where  $\sigma_{LO}$  represents the variance of the LO amplitude fluctuations.

To find the total probability distribution  $P_{\text{tot}}(\mu)$  that accounts for the local oscillator fluctuations, we perform an ensemble average by integrating the conditional distribution  $P_G(\mu)$  over the Gaussian prior of the LO amplitude.

$$P_{\text{total}}(\mu) = \int d\delta\alpha_L P_G(\mu|\delta\alpha_L) P_G(\delta\alpha_L) = \quad (B6)$$

S

- 
- [1] U. Leonhardt, *Measuring the Quantum State of Light*, Cambridge Studies in Modern Optics (Cambridge University Press, Cambridge, 1997) p. 193.
  - [2] S. L. Braunstein and P. van Loock, Quantum information with continuous variables, *Rev. Mod. Phys.* **77**, 513 (2005).
  - [3] C. Weedbrook, S. Pirandola, R. García-Patrón, N. J. Cerf, T. C. Ralph, J. H. Shapiro, and S. Lloyd, Gaussian quantum information, *Rev. Mod. Phys.* **84**, 621 (2012).
  - [4] G. M. D'Ariano, M. G. Paris, and M. F. Sacchi, Quantum tomography, *Advances in imaging and electron physics* **128**, S1076 (2003).
  - [5] A. I. Lvovsky and M. G. Raymer, Continuous-variable optical quantum-state tomography, *Rev. Mod. Phys.* **81**, 299 (2009).
  - [6] Y.-L. Zhang, C.-S. Yang, C.-L. Zou, T. Xia, G.-C. Guo, and X.-B. Zou, Quantum state preparation of an atomic ensemble via cavity-assisted homodyne measurement, *Journal of Physics B: Atomic, Molecular and Optical Physics* **52**, 215003 (2019).
  - [7] F. Grosshans and P. Grangier, Continuous variable quantum cryptography using coherent states, *Phys. Rev. Lett.* **88**, 057902 (2002).
  - [8] S. Pirandola, U. L. Andersen, L. Banchi, M. Berta, D. Bunandar, R. Colbeck, D. Englund, T. Gehring, C. Lupo, C. Ottaviani, J. L. Pereira, M. Razavi, J. S. Shaari, M. Tomamichel, V. C. Usenko, G. Vallone, P. Villoresi, and P. Wallden, Advances in quantum cryptography, *Adv. Opt. Photon.* **12**, 1012 (2020).
  - [9] Y. Zhang, Y. Bian, Z. Li, S. Yu, and H. Guo, Continuous-variable quantum key distribution system: Past, present, and future, *Applied Physics Reviews* **11**, 011318 (2024).
  - [10] G. Giedke and J. Ignacio Cirac, Characterization of Gaussian operations and distillation of Gaussian states, *Phys. Rev. A* **66**, 032316 (2002).
  - [11] J. Fiurášek and L. Mišta, Gaussian localizable entanglement, *Phys. Rev. A* **75**, 060302 (2007).
  - [12] A. Serafini, *Quantum Continuous Variables: A Primer of Theoretical Methods*, 2nd ed. (CRC Press, Taylor & Francis Group, Boca Raton, 2023) p. 362.
  - [13] H. P. Yuen and V. W. S. Chan, Noise in homodyne and heterodyne detection, *Opt. Lett.* **8**, 177 (1983).
  - [14] W. Vogel and D.-G. Welsch, *Quantum optics* (John Wiley & Sons, 2006).
  - [15] D. Pereira, M. Almeida, M. Facão, A. N. Pinto, and N. A. Silva, Impact of receiver imbalances on the security of continuous variables quantum key distribution, *EPJ Quantum Technology* **8**, 10.1140/epjqt/s40507-021-00112-z (2021).
  - [16] A. Barchielli and A. Santamato, Eight-port homodyne detector: The effect of imperfections on quantum random-number generation and on detection of quadratures, *Physical Review A* **106**, 10.1103/physreva.106.022620 (2022).
  - [17] C. Lupo and Y. Ouyang, Quantum key distribution with nonideal heterodyne detection: Composable security of discrete-modulation continuous-variable protocols, *PRX Quantum* **3**, 010341 (2022).
  - [18] A. A. Hajomer, A. N. Oruganti, I. Derkach, U. L. Andersen, V. C. Usenko, and T. Gehring, *Photonics Research* **14**, 99 (2026).
  - [19] J. O. Bartlett, A. J. M. Wilson, C. J. Chunnillall, and R. Kumar, Detector asymmetry in continuous variable quantum key distribution, *arXiv preprint arXiv:2510.17419* (2025).

- [20] S. T. Ali and G. G. Emch, Fuzzy observables in quantum mechanics, *Journal of Mathematical Physics* **15**, 176–182 (1974).
- [21] S. T. Ali, C. Carmeli, T. Heinosaari, and A. Toigo, Commutative povms and fuzzy observables, *Foundations of Physics* **39**, 593–612 (2009).
- [22] E. B. Davies and J. T. Lewis, An operational approach to quantum probability, *Communications in Mathematical Physics* **17**, 239–260 (1970).
- [23] A. Holevo, Problems in the mathematical theory of quantum communication channels, *Reports on Mathematical Physics* **12**, 273 (1977).
- [24] A. S. Holevo, Statistical Problems in Quantum Physics, in *Proceedings of the Second Japan–USSR Symposium on Probability Theory*, Lecture Notes in Mathematics, Vol. 330 (Springer, 1973) pp. 104–119.
- [25] M. Ozawa, Quantum measuring processes of continuous observables, *Journal of Mathematical Physics* **25**, 79–87 (1984).
- [26] M. A. Nielsen and I. L. Chuang, *Quantum Computation and Quantum Information*, 10th ed. (Cambridge University Press, NY, 2010) p. 676.
- [27] F. Caruso, V. Giovannetti, and A. S. Holevo, One-mode bosonic gaussian channels: a full weak-degradability classification, *New Journal of Physics* **8**, 310–310 (2006).
- [28] F. Laudenbach, C. Pacher, C.-H. F. Fung, A. Poppe, M. Peev, B. Schrenk, M. Hentschel, P. Walther, and H. Hübel, Continuous-variable quantum key distribution with gaussian modulation—the theory of practical implementations, *Advanced Quantum Technologies* **1**, 1800011 (2018).
- [29] A. S. Naumchik, R. K. Goncharov, and A. D. Kiselev, Asymmetry effects in homodyne and heterodyne measurements: Positive operator-valued measures and asymptotic security of gaussian-continuous-variable quantum key distribution, *Phys. Rev. A* **114**, 012614 (2026).
- [30] J. Lodewyck, M. Bloch, R. García-Patrón, S. Fossier, E. Karpov, E. Diamanti, T. Debuisschert, N. J. Cerf, R. Tualle-Brouri, S. W. McLaughlin, and P. Grangier, Quantum key distribution over 25 km with an all-fiber continuous-variable system, *Phys. Rev. A* **76**, 042305 (2007).
- [31] V. C. Usenko and R. Filip, Trusted noise in continuous-variable quantum key distribution: A threat and a defense, *Entropy* **18**, 10.3390/e18010020 (2016).
- [32] F. Laudenbach, C. Pacher, C.-H. F. Fung, A. Poppe, M. Peev, B. Schrenk, M. Hentschel, P. Walther, and H. Hübel, Continuous-variable quantum key distribution with Gaussian modulation—the theory of practical implementations, *Advanced Quantum Technologies* **1**, 1800011 (2018).
- [33] F. Laudenbach and C. Pacher, Analysis of the trusted-device scenario in continuous-variable quantum key distribution, *Advanced Quantum Technologies* **2**, 1900055 (2019).
- [34] R. Namiki, A. Kitagawa, and T. Hirano, Secret key rate of a continuous-variable quantum-key-distribution scheme when the detection process is inaccessible to eavesdroppers, *Phys. Rev. A* **98**, 042319 (2018).
- [35] S. Pirandola, Composable security for continuous variable quantum key distribution: Trust levels and practical key rates in wired and wireless networks, *Physical Review Research* **3**, 043014 (2021).
- [36] S. Pan, D. Monokandylos, and B. Qi, Detector noise in continuous-variable quantum key distribution, *Physical Review A* **112**, 10.1103/4h84-5tsg (2025).
- [37] Z. Zuo, M. Ghalaii, and S. Pirandola, Realistic threat models for fiber and free-space continuous variable quantum key distribution, *Phys. Rev. Research* **8**, 013185 (2026).
- [38] Y.-C. Zhang, Y. Huang, Z. Chen, Z. Li, S. Yu, and H. Guo, One-time shot-noise unit calibration method for continuous-variable quantum key distribution, *Phys. Rev. Applied* **13**, 024058 (2020).
- [39] M. Zou, Y. Mao, and T.-Y. Chen, Rigorous calibration of homodyne detection efficiency for continuous-variable quantum key distribution, *Opt. Express* **30**, 22788 (2022).
- [40] S. Yamano, T. Matsuura, Y. Kuramochi, T. Sasaki, and M. Koashi, General treatment of gaussian trusted noise in continuous variable quantum key distribution (2023), arXiv:2305.17684 [quant-ph].
- [41] M. Wu, J. Li, S. Yu, and Y. Zhang, Practical discrete-modulated continuous-variable quantum key distribution with one-time shot-noise unit calibration, *Phys. Rev. A* **113**, 052604 (2026).
- [42] F. Grosshans and P. Grangier, Continuous variable quantum cryptography using coherent states, *Phys. Rev. Lett.* **88**, 057902 (2002).
- [43] M. Navascués, F. Grosshans, and A. Acín, Optimality of gaussian attacks in continuous-variable quantum cryptography, *Physical Review Letters* **97**, 190502 (2006).
- [44] R. García-Patrón and N. J. Cerf, Unconditional optimality of gaussian attacks against continuous-variable quantum key distribution, *Physical Review Letters* **97**, 190503 (2006).
- [45] C. Weedbrook, S. Pirandola, R. García-Patrón, N. J. Cerf, T. C. Ralph, J. H. Shapiro, and S. Lloyd, Gaussian quantum information, *Rev. Mod. Phys.* **84**, 621 (2012).
- [46] I. Devetak and A. Winter, Distillation of secret key and entanglement from quantum states, *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences* **461**, 207 (2005).
- [47] S. M. Barnett, J. Jeffers, A. Gatti, and R. Loudon, Quantum optics of lossy beam splitters, *Physical Review A* **57**, 2134–2145 (1998).
- [48] L. Knöll, S. Scheel, E. Schmidt, D.-G. Welsch, and A. V. Chizhov, Quantum-state transformation by dispersive and absorbing four-port devices, *Physical Review A* **59**, 4716–4726 (1999).
- [49] R. Uppu, T. A. W. Wolterink, T. B. H. Tentrup, and P. W. H. Pinkse, Quantum optics of lossy asymmetric beam splitters, *Optics Express* **24**, 16440 (2016).